



# PBT-RB040SGESSCVLC0Z

PBT

PRESSURE SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type                | Part no. |
|---------------------|----------|
| PBT-RB040SGESSVLC0Z | 6044785  |

Other models and accessories → [www.sick.com/PBT](http://www.sick.com/PBT)

### Detailed technical data

#### Features

|                            |                      |
|----------------------------|----------------------|
| <b>Medium</b>              | Liquid, gaseous      |
| <b>Pressure type</b>       | Gauge pressure       |
| <b>Pressure unit</b>       | bar                  |
| <b>Measuring range</b>     | 0 bar ... 40 bar     |
| <b>Process temperature</b> | 0 °C ... +80 °C      |
| <b>Output signal</b>       | 0 V ... 10 V, 3-wire |
| <b>Specialty</b>           | Without              |

#### Mechanics/electronics

|                                    |                                                                                                                                                                                                 |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Process connection</b>          | G ½ B according to EN 837                                                                                                                                                                       |
| <b>Wetted parts</b>                | Pressure Connection: stainless steel 316L<br>Pressure sensor: stainless steel 316L (for measurement ranges from 0 bar ... 10 bar rel stainless steel 13-8 PH)                                   |
| <b>Internal transmission fluid</b> | Silicone oil (only with pressure ranges < 0 bar ... 10 bar and ≤ 0 bar abs ... 25 bar abs)                                                                                                      |
| <b>Pressure port</b>               | , Standard                                                                                                                                                                                      |
| <b>Housing material</b>            | Stainless steel                                                                                                                                                                                 |
| <b>Connection type</b>             | L-connector acc. to DIN 175301-803 A, IP65                                                                                                                                                      |
| <b>Supply voltage</b>              | 8 V DC ... 30 V DC with output signal 4 mA ... 20 mA and 0 V ... 5 V<br>14 V DC ... 30 V DC with output signal 0 V ... 10 V<br>14 V DC ... 30 V DC <sup>1)</sup>                                |
| <b>Power consumption</b>           | Signal current (max. 25 mA) for current output<br>Max. 8 mA for voltage output signal                                                                                                           |
| <b>Electrical safety</b>           | Overvoltage protection: 32 V DC, 36 V DC with 4 mA ... 20 mA<br>Short-circuit protection: Q <sub>A</sub> towards M<br>Reverse polarity protection: L <sup>+</sup> to M<br>Protection class: III |
| <b>Isolation voltage</b>           | 500 V DC                                                                                                                                                                                        |
| <b>CE-conformity</b>               | Pressure equipment directive: 2014/68/EU, EMC directive: 2014/30/EU, EN 61 326-2-3                                                                                                              |
| <b>Weight sensor</b>               | Approx. 80 g                                                                                                                                                                                    |

<sup>1)</sup> The pressure transmitter must be supplied with power by a limited energy circuit compliant with 9.3 of UL/EN/IEC 601010-1 or LPS to UL/EN/IEC 60950-1 or Class 2 to UL 1310/UL1585 (NEC or CEC). The power supply must be suitable for operation above 2,000 m if the pressure transmitter is used above this altitude.

|                             |                                                |
|-----------------------------|------------------------------------------------|
| <b>Seal</b>                 | Copper                                         |
| <b>Enclosure rating</b>     | IP65                                           |
| <b>Protection class III</b> | ✓                                              |
| <b>Reference conditions</b> | Reference conditions: According to IEC 61298-1 |
| <b>MTTF</b>                 | 1,176 years                                    |

<sup>1)</sup> The pressure transmitter must be supplied with power by a limited energy circuit compliant with 9.3 of UL/EN/IEC 601010-1 or LPS to UL/EN/IEC 60950-1 or Class 2 to UL 1310/UL1585 (NEC or CEC). The power supply must be suitable for operation above 2,000 m if the pressure transmitter is used above this altitude.

## Performance

|                                           |                                                                       |
|-------------------------------------------|-----------------------------------------------------------------------|
| <b>Non-linearity</b>                      | ≤ ± 0.5 %, (Best Fit Straight Line, BFSL) according to IEC 61298-2    |
| <b>Accuracy</b>                           | ≤ ± 1 % of the span                                                   |
| <b>Adjustment accuracy of zero signal</b> | ≤ 0.5 % of span typ., ≤ 0.8 % of span max. (with non-linearity 0.5 %) |
| <b>Hysteresis</b>                         | ≤ 0.16 % of the span                                                  |
| <b>Non-repeatability</b>                  | ≤ 0.1 % of the span                                                   |
| <b>Response time</b>                      | < 4 ms                                                                |
| <b>Signal noise</b>                       | ≤ 0.3 % of the span                                                   |
| <b>Long-term drift/one-year stability</b> | ≤ 0.1 % of span to IEC 61298-2                                        |
| <b>Rated temperature range</b>            | 0 °C ... +80 °C                                                       |
| <b>Service life</b>                       | Minimum 100 Mio. life cycles                                          |

## Ambient data


|                            |                                                                              |
|----------------------------|------------------------------------------------------------------------------|
| <b>Ambient temperature</b> | 0 °C ... +80 °C                                                              |
| <b>Storage temperature</b> | -40 °C ... +70 °C                                                            |
| <b>Relative humidity</b>   | 45 % ... 75 %                                                                |
| <b>Shock load</b>          | 500 g according to IEC 60068-2-27 (mechanical shock)                         |
| <b>Vibration load</b>      | 10 g according to IEC 60068-2-6 (vibration under resonance)<br>20 g optional |

## Classifications


|                       |          |
|-----------------------|----------|
| <b>ECI@ss 5.0</b>     | 27200614 |
| <b>ECI@ss 5.1.4</b>   | 27200614 |
| <b>ECI@ss 6.0</b>     | 27200614 |
| <b>ECI@ss 6.2</b>     | 27200614 |
| <b>ECI@ss 7.0</b>     | 27200614 |
| <b>ECI@ss 8.0</b>     | 27200614 |
| <b>ECI@ss 8.1</b>     | 27200614 |
| <b>ECI@ss 9.0</b>     | 27200614 |
| <b>ECI@ss 10.0</b>    | 27200614 |
| <b>ECI@ss 11.0</b>    | 27200614 |
| <b>ETIM 5.0</b>       | EC011478 |
| <b>ETIM 6.0</b>       | EC011478 |
| <b>ETIM 7.0</b>       | EC011478 |
| <b>UNSPSC 16.0901</b> | 41112410 |

**Dimensional drawing** (Dimensions in mm (inch))

Housing with L-connector (DIN 175301-803 A), IP65



**Connection type**

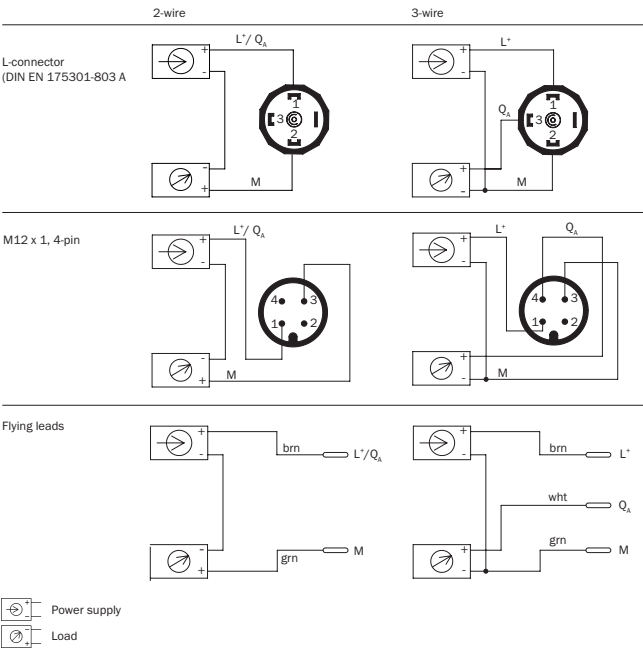

**Recommended accessories**

Other models and accessories → [www.sick.com/PBT](http://www.sick.com/PBT)

|                                                                                     | Brief description                                                                                     | Type               | Part no. |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|--------------------|----------|
| Mounting brackets and plates                                                        |                                                                                                       |                    |          |
|  | Mounting bracket for simple and stable wall mounting of pressure sensors with 27 mm hexagon, Aluminum | BEF-FL-ALUPBS-HLDR | 5322501  |

|                                                                                   | Brief description                                                                                                                                                                                                             | Type               | Part no. |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Heating and cooling devices                                                       |                                                                                                                                                                                                                               |                    |          |
|  | Cooling element, extension of the process temperature up to 200 °C. Maximum ambient temperature 30 °C. Max. process pressure 200 bar. Not suitable for pressure measurement in steam. Outer thread G 1/2, inner thread G 1/2. | BEF-CE-G12G12-200C | 5324394  |
|                                                                                   | Cooling element, extension of the process temperature up to 150 °C. Maximum ambient temperature 30 °C. Max. process pressure 200 bar. Not suitable for pressure measurement in steam. Outer thread G 1/4, inner thread G 1/2. | BEF-CE-G12G14-150C | 5332155  |
|                                                                                   | Cooling element, extension of the process temperature up to 200 °C. Maximum ambient temperature 30 °C. Max. process pressure 200 bar. Not suitable for pressure measurement in steam. Outer thread G 1/4, inner thread G 1/2. | BEF-CE-G12G14-200C | 5336706  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)