



# THTS-1AAC30506MZ

THTS

TEMPERATURE SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



## Ordering information

| Type             | Part no. |
|------------------|----------|
| THTS-1AAC30506MZ | 6047713  |

Other models and accessories → [www.sick.com/THTS](http://www.sick.com/THTS)

## Detailed technical data

### Features

|                                                             |                                                                                    |
|-------------------------------------------------------------|------------------------------------------------------------------------------------|
| <b>Measuring range</b>                                      | -50 °C +150 °C                                                                     |
| <b>Sensor element</b>                                       | Pt100, Pt1000 (for 4 mA ... 20 mA version)                                         |
| <b>Analog signal output and ohmic load <math>R_A</math></b> | 4 mA ... 20 mA, 2-wire ( $R_A \leq (L^+ - 10 \text{ V}) / 0.023 \text{ A [Ohm]}$ ) |

### Mechanics/electronics

|                                           |                                                                                               |
|-------------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>Process connection</b>                 | Clamp (ISO 2852) DN 25, DN 33.7, DN 38                                                        |
| <b>Insertion length/diameter of probe</b> | 50 mm / 6 mm                                                                                  |
| <b>Wetted parts</b>                       | Stainless steel 1.4435 / 316L, $R_a \leq 0.8 \mu\text{m}$                                     |
| <b>Pressure resistance</b>                | Max. 16 bar at room temperature                                                               |
| <b>Housing material</b>                   | Stainless steel (CrNi)                                                                        |
| <b>Electrical connection</b>              | Round connector M12 x 1, 4-pin, IP 67 and IP69 <sup>1)</sup>                                  |
| <b>Supply voltage</b>                     | 10 V DC ... 35 V DC                                                                           |
| <b>Maximum current consumption</b>        | Ca. 30 mA                                                                                     |
| <b>Electrical safety</b>                  | Protection class: III, dielectric strength: 500 V AC, Reverse polarity protection: $L^+$ to M |
| <b>Protection class III</b>               | ✓                                                                                             |
| <b>CE-conformity</b>                      | 2004/108/EC, EN 61326-2-3                                                                     |
| <b>RoHS certificate</b>                   | ✓                                                                                             |
| <b>Initialization time</b>                | Max. 4 s                                                                                      |

<sup>1)</sup> IP enclosure rating as per IEC 60529. The enclosure rating classes specified only apply while the device is connected with male cable connectors of the corresponding enclosure rating.

### Performance

|                                   |                                                               |
|-----------------------------------|---------------------------------------------------------------|
| <b>Accuracy of sensor element</b> | Class A according to IEC 60751 <sup>1)</sup>                  |
| <b>Transmitter accuracy</b>       | $\pm 0,25 \text{ K}$                                          |
| <b>Transmitter linearity</b>      | $\leq \pm 0.1 \% \text{ of span}$                             |
| <b>Response time</b>              | $t_{50} \leq 3,3 \text{ s}$<br>$t_{90} \leq 9,7 \text{ s}^2)$ |

<sup>1)</sup> Class B (measuring range -50 °C ... -30 °C).

<sup>2)</sup> Depending on sensor configuration, according to IEC 60751.

## Ambient data

|                                          |                                         |
|------------------------------------------|-----------------------------------------|
| <b>Ambient temperature</b>               | -40 °C ... +85 °C                       |
| <b>Storage and transport temperature</b> | -40 °C ... +85 °C                       |
| <b>Shock resistance</b>                  | 50 g, 6ms (according to IEC 60068-2-27) |
| <b>Relative humidity</b>                 | 100 % <sup>1)</sup>                     |

<sup>1)</sup> , Condensation allowed.


## Classifications

|                       |          |
|-----------------------|----------|
| <b>ECI@ss 5.0</b>     | 27200208 |
| <b>ECI@ss 5.1.4</b>   | 27200208 |
| <b>ECI@ss 6.0</b>     | 27200208 |
| <b>ECI@ss 6.2</b>     | 27200208 |
| <b>ECI@ss 7.0</b>     | 27200208 |
| <b>ECI@ss 8.0</b>     | 27200208 |
| <b>ECI@ss 8.1</b>     | 27200208 |
| <b>ECI@ss 9.0</b>     | 27200208 |
| <b>ECI@ss 10.0</b>    | 27200208 |
| <b>ECI@ss 11.0</b>    | 27200208 |
| <b>ETIM 5.0</b>       | EC002994 |
| <b>ETIM 6.0</b>       | EC002994 |
| <b>ETIM 7.0</b>       | EC002994 |
| <b>UNSPSC 16.0901</b> | 41112211 |


Dimensional drawing (Dimensions in mm (inch))

Dimensional drawing

Pt100, 4 mA...20 mA,  
up to 150 °C

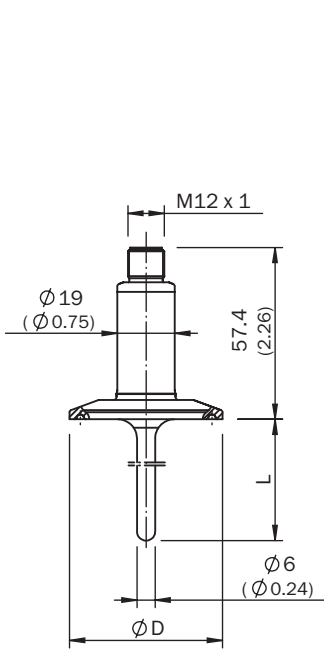

Pt100, 4 mA...20 mA,  
up to 250 °C

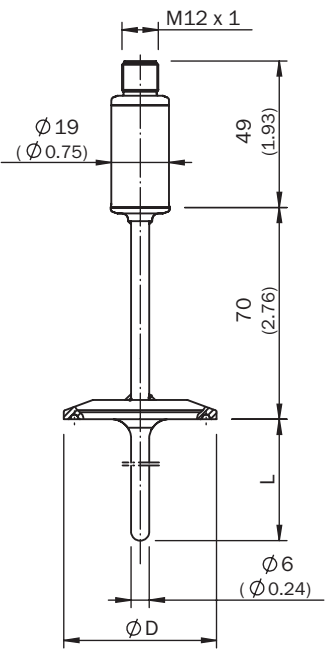

All dimensions in mm (inch)


| Design    |                   | $\phi D$    |
|-----------|-------------------|-------------|
| DIN 32676 | DN 10 ... DN 20   | 34.0 (1.34) |
|           | DN 25 ... DN 40   | 50.5 (1.99) |
|           | DN 50             | 64.0 (2.52) |
| ISO 2852  | DN 12 ... DN 21.3 | 34.0 (1.34) |
|           | DN 25 ... DN 38   | 50.5 (1.99) |
|           | DN 40, DN 51      | 64.0 (2.52) |
| Tri-Clamp | 1", 1 1/2"        | 50.5 (1.99) |
|           | 2"                | 64.0 (2.52) |

## Application



## Connection type

Plug M12 x 1, output signal 4 mA ... 20 mA



## Recommended accessories

Other models and accessories → [www.sick.com/THTS](http://www.sick.com/THTS)

|                                                                                     | Brief description                                                                                                                                    | Type               | Part no. |
|-------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Plug connectors and cables                                                          |                                                                                                                                                      |                    |          |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 2 m  | YF2A14-020UB3XLEAX | 2095607  |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 2 m                | YF2A14-020VB3XLEAX | 2096234  |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m  | YF2A14-050UB3XLEAX | 2095608  |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 5 m                | YF2A14-050VB3XLEAX | 2096235  |
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 10 m | YF2A14-100UB3XLEAX | 2095609  |

|                                                                                   | Brief description                                                                                                                                  | Type               | Part no. |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
|  | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 10 m             | YF2A14-100VB3XLEAX | 2096236  |
|                                                                                   | Head A: female connector, M12, 4-pin, straight, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 15 m             | YF2A14-150VB3XLEAX | 2096237  |
|  | Head A: female connector, M12, 4-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 2 m  | YG2A14-020UB3XLEAX | 2095766  |
|  | Head A: female connector, M12, 4-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 2 m                | YG2A14-020VB3XLEAX | 2095895  |
|  | Head A: female connector, M12, 4-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 5 m  | YG2A14-050UB3XLEAX | 2095767  |
|  | Head A: female connector, M12, 4-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 5 m                | YG2A14-050VB3XLEAX | 2095897  |
|  | Head A: female connector, M12, 4-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PUR, halogen-free, unshielded, 10 m | YG2A14-100UB3XLEAX | 2095768  |
|  | Head A: female connector, M12, 4-pin, angled, A-coded<br>Head B: Flying leads<br>Cable: Sensor/actuator cable, PVC, unshielded, 10 m               | YG2A14-100VB3XLEAX | 2095898  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)