



# LFV330-XXGAVXPR0350

## LFV300

LEVEL SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type                | Part no. |
|---------------------|----------|
| LFV330-XXGAVXPR0350 | 6048445  |

Other models and accessories → [www.sick.com/LFV300](http://www.sick.com/LFV300)

### Detailed technical data

#### Features

|                              |                                                 |
|------------------------------|-------------------------------------------------|
| <b>Medium</b>                | Fluids                                          |
| <b>Measurement</b>           | Switch                                          |
| <b>Probe length</b>          | 350 mm                                          |
| <b>Process pressure</b>      | -1 bar ... 64 bar                               |
| <b>Process temperature</b>   | -50 °C ... +150 °C                              |
| <b>Fill material density</b> | 0.5 g/cm <sup>3</sup> ... 2.5 g/cm <sup>3</sup> |

#### Performance

|                                   |                          |
|-----------------------------------|--------------------------|
| <b>Accuracy of sensor element</b> | ± 2 mm                   |
| <b>Reproducibility</b>            | ≤ 1 mm                   |
| <b>Viscosity</b>                  | 0.1 mPas ... 10,000 mPas |
| <b>Response time</b>              | 500 ms                   |

#### Electronics

|                               |                                                                 |
|-------------------------------|-----------------------------------------------------------------|
| <b>Power consumption</b>      | 5 mA ... 30 mA                                                  |
| <b>Initialization time</b>    | < 2 s                                                           |
| <b>VDE protection class 1</b> | ✓                                                               |
| <b>Connection type</b>        | M20 x 1.5                                                       |
| <b>Output signal</b>          | Double relay (DPDT)                                             |
| <b>Supply voltage</b>         | Double relay (DPDT): 20 V DC ... 72 V DC / 20 V AC ... 253 V AC |
| <b>Hysteresis</b>             | 2 mm                                                            |
| <b>Output current</b>         | > 10 µA; < 3A AC, 1A DC                                         |
| <b>Inductive load</b>         | 750 VA 54 W                                                     |
| <b>Capacitive load</b>        | 750 VA 54 W                                                     |
| <b>Contact load</b>           | Min. 50 mW / max. 750 VA, 54 W                                  |
| <b>Enclosure rating</b>       | IP66 / IP67                                                     |
| <b>Temperature drift</b>      | 0,03 mm/K                                                       |

## Mechanics

|                           |                                             |
|---------------------------|---------------------------------------------|
| <b>Wetted parts</b>       | Stainless steel 316L (optional Ra ≤ 0.8 µm) |
| <b>Process connection</b> | G 1 A PN 64                                 |
| <b>Housing material</b>   | Plastic                                     |
| <b>Sensor material</b>    | Stainless steel 1.4404                      |

## Ambient data

|                                      |                   |
|--------------------------------------|-------------------|
| <b>Ambient operating temperature</b> | -40 °C ... +70 °C |
| <b>Ambient storage temperature</b>   | -40 °C ... +80 °C |


## Classifications

|                       |          |
|-----------------------|----------|
| <b>ECI@ss 5.0</b>     | 27273202 |
| <b>ECI@ss 5.1.4</b>   | 27273202 |
| <b>ECI@ss 6.0</b>     | 27273202 |
| <b>ECI@ss 6.2</b>     | 27273202 |
| <b>ECI@ss 7.0</b>     | 27273202 |
| <b>ECI@ss 8.0</b>     | 27273202 |
| <b>ECI@ss 8.1</b>     | 27273202 |
| <b>ECI@ss 9.0</b>     | 27273202 |
| <b>ECI@ss 10.0</b>    | 27273202 |
| <b>ECI@ss 11.0</b>    | 27273202 |
| <b>ETIM 5.0</b>       | EC002654 |
| <b>ETIM 6.0</b>       | EC002654 |
| <b>ETIM 7.0</b>       | EC002654 |
| <b>UNSPSC 16.0901</b> | 41111938 |

## Type code

### LFV330 type code

|                                                |                                                                 |
|------------------------------------------------|-----------------------------------------------------------------|
| <b>Certification</b>                           |                                                                 |
| XX                                             | Without approval                                                |
| XA                                             | WHG approval                                                    |
| CA                                             | ATEX II 1G, 1/2G, 2G Ex ia IIC T6 Ga, Ga/Gb, Gb +WHG            |
| DA                                             | ATEX II 1/2G Ex db IIC T6...T2 Ga/Gb +WHG                       |
| <b>Process connection/Material (see below)</b> |                                                                 |
| <b>Middle section / Process temperature</b>    |                                                                 |
| X                                              | without / -50 °C ... +150 °C                                    |
| T                                              | with / -50 °C ... +250 °C                                       |
| <b>Housing / Cable screw connection</b>        |                                                                 |
| P                                              | Plastics IP 66, IP 67 / M20 x 1,5                               |
| N                                              | Plastics IP 66, IP 67 / ½" NPT                                  |
| M                                              | Aluminium IP 66, IP 67 / M20 x 1,5                              |
| U                                              | Aluminium IP 66, IP 67 / ½" NPT                                 |
| V                                              | Stainless steel (precision casting) 316L IP66, IP67 / M20 x 1,5 |
| A                                              | Stainless steel (precision casting) 316L IP 66, IP 67 ½" NPT    |
| 8                                              | Stainless steel (electro buffed) 316L IP 66, IP 67 / M20 x 1,5  |
| 9                                              | Stainless steel (electro buffed) 316L IP 66, IP 67 / ½" NPT     |
| <b>Electronics</b>                             |                                                                 |
| C                                              | Contactless switch 20...253VAC(DC)                              |




|     |                                         |
|-----|-----------------------------------------|
| GBV | Thread G 3/4 A PN 64 / 316L             |
| GBP | Thread G 3/4 A PN 64 / 316L Ra<0,8µm    |
| NBV | Thread 3/4" NPT PN 64 / 316L            |
| NBP | Thread 3/4" NPT PN 64 / 316L Ra<0,8µm   |
| GAV | Thread G 1 A PN 64 / 316L               |
| GAP | Thread G 1 A PN 64 / 316L Ra<0,8µm      |
| NAV | Thread 1" NPT PN 64 / 316L              |
| NAP | Thread 1" NPT PN 64 / 316L Ra<0,8µm     |
| GCV | Thread G 1 1/2 A PN 64 / 316L           |
| NCV | Thread 1 1/2" NPT PN 64 / 316L          |
| TAP | Varivent N50-40 / 316L Ra<0,8µm ZB3052  |
| TNP | Varivent N25-100 / 316L Ra<0,8µm ZB3052 |
| CCP | Tri-Clamp 1" PN 16 / 316L Ra<0,8µm      |
| CBP | Tri-Clamp 1 1/2" PN 16 / 316L Ra<0,8µm  |
| CAP | Tri-Clamp 2" PN 16 / 316L Ra<0,8µm      |
| CDP | Tri-Clamp 2 1/2" PN 10 / 316L Ra<0,8µm  |
| CEP | Tri-Clamp 3" PN 10 / 316L Ra<0,8µm      |

#### 4 FLUID SENSORS | SICK


# Dimensional drawing (Dimensions in mm (inch))

LFV330

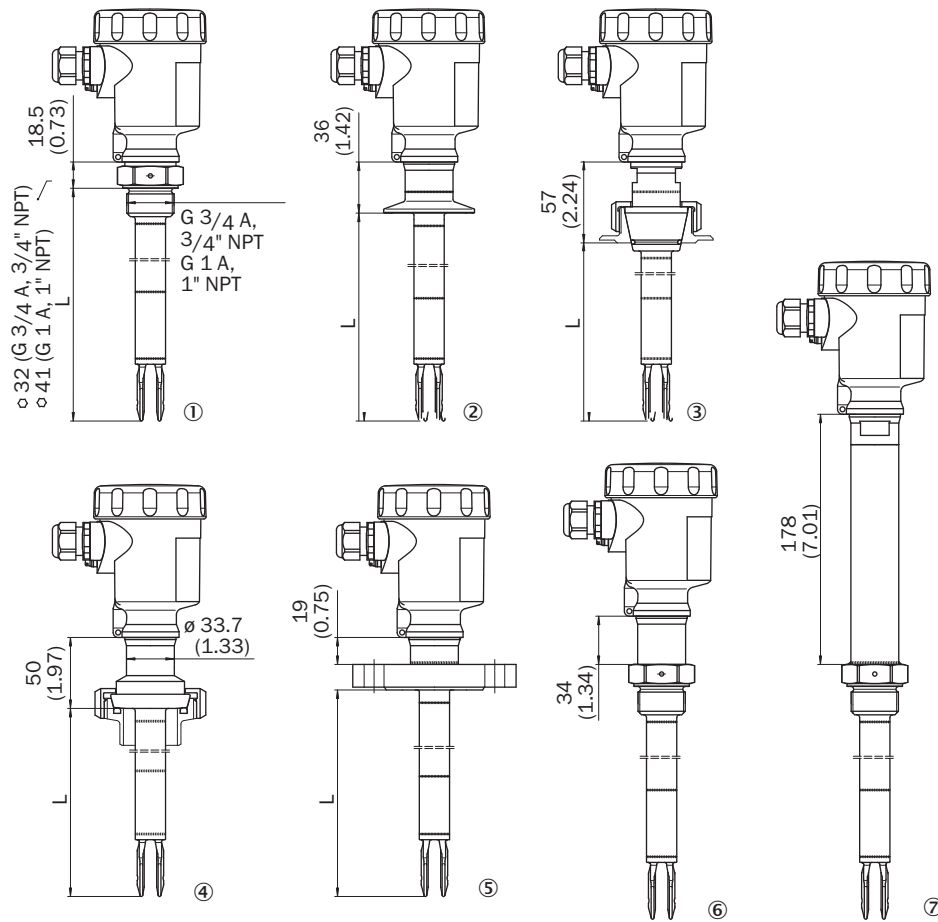


- ① Thread
- ② Tri-Clamp
- ③ DN 25 cone
- ④ Bolting D 40
- ⑤ Flange
- ⑥ Gas-tight leadthrough
- ⑦ Temperature adapter

Marking on the welded flange




### Connection diagram

Relay - electronic module

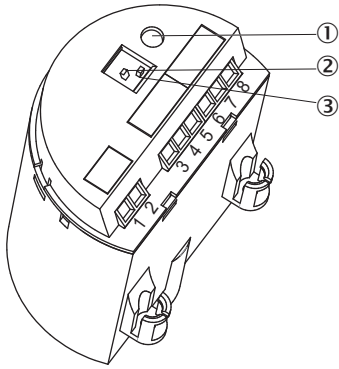

- ① Signal lamp (LED)
- ② DIL switch for mode adjustment
- ③ DIL-switch for sensitivity adjustment


Relay connection diagram (single chamber housing)



- ① Relay output
- ② Relay output
- ③ Supply voltage


### Instruction for installation

Inflowing medium

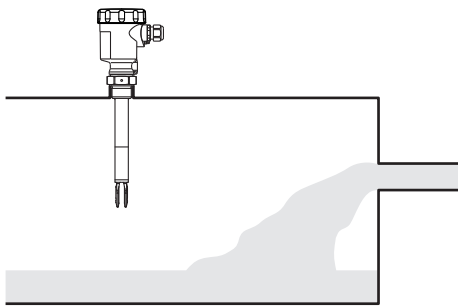

## Characteristic curve

Influence of the process temperature on the switching point

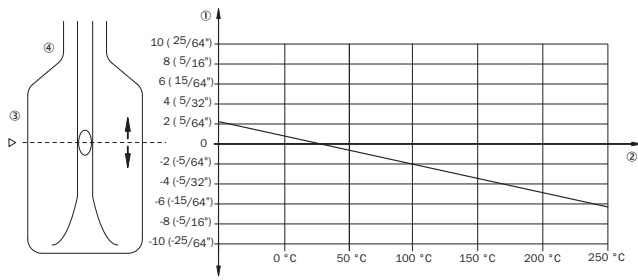

- ① Shifting of the switching point in mm (in)
- ② Process temperature in °C (°F)
- ③ Switching point at reference conditions (notch)
- ④ Tuning fork

## Recommended accessories

Other models and accessories → [www.sick.com/LFV300](http://www.sick.com/LFV300)

|                                                                                                                           | Brief description                                                                       | Type               | Part no. |
|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------------------|----------|
| Flanges                                                                                                                   |                                                                                         |                    |          |
|                                         | Welded flange/welded connector, DIN11851-1, DN25 / PN40, Stainless steel 1.4404         | BEF-FL-851D25-LFV2 | 5321527  |
|                                        | Welded flange/welded connector, process connection G 1, Stainless steel 1.4404          | BEF-FL-GEWG10-LFV2 | 4054605  |
|                                        | Welded flange/welded connector, G 3/4 process connection, Stainless steel 1.4404        | BEF-FL-GEWG34-LFV2 | 4054604  |
|  | Welded flange/welded connector, process connection Tri-Clamp 1", Stainless steel 1.4404 | BEF-FL-TCLI10-LFV2 | 5321678  |
|                                                                                                                           | Welded flange/welded connector, process connection Tri-Clamp 2", Stainless steel 1.4404 | BEF-FL-TCLI20-LFV2 | 5321679  |
| Mounting brackets and plates                                                                                              |                                                                                         |                    |          |
|                                                                                                                           | BEF-MU-316G10-ALFV                                                                      | BEF-MU-316G10-ALFV | 5322463  |
| Electronic modules                                                                                                        |                                                                                         |                    |          |
|                                        | Double relay (DPDT): 20 V DC ... 72 V DC / 20 ... 250 V AC                              | ECD-RE-LFVREL-0001 | 6038671  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)