


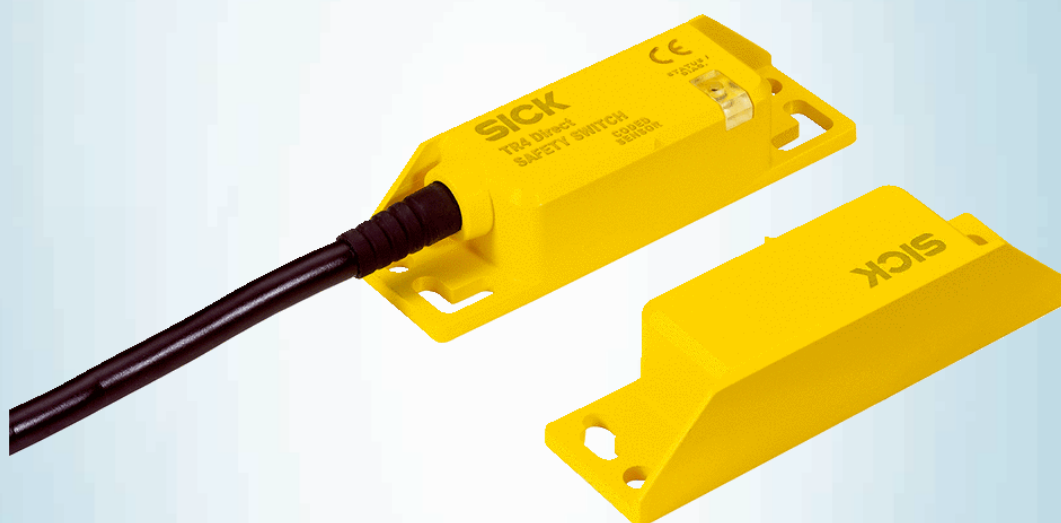


# TR4-SEU03PB

TR4 Direct

NON-CONTACT SAFETY SWITCHES

**SICK**  
Sensor Intelligence.



## Ordering information

| Type        | Part no. |
|-------------|----------|
| TR4-SEU03PB | 6070812  |

Other models and accessories → [www.sick.com/TR4\\_Direct](http://www.sick.com/TR4_Direct)



## Detailed technical data

### Features

|                                                     |                     |
|-----------------------------------------------------|---------------------|
| <b>System part</b>                                  | Sensor and actuator |
| <b>Sensor principle</b>                             | Transponder         |
| <b>Number of safe outputs</b>                       | 2                   |
| <b>Safe switch on distance <math>S_{ao}</math></b>  | 15 mm               |
| <b>Safe switch off distance <math>S_{ar}</math></b> | 25 mm               |
| <b>Active sensor surfaces</b>                       | 2                   |
| <b>Actuation directions</b>                         | 5                   |
| <b>Boundary area indication</b>                     | ✓                   |
| <b>Coding</b>                                       | Uniquely coded      |

### Safety-related parameters

|                                                                           |                                                                              |
|---------------------------------------------------------------------------|------------------------------------------------------------------------------|
| <b>Safety integrity level</b>                                             | SIL3 (IEC 61508)<br>SILCL3 (EN 62061)                                        |
| <b>Category</b>                                                           | Category 4 (EN ISO 13849)                                                    |
| <b>Performance level</b>                                                  | PL e (EN ISO 13849)                                                          |
| <b>PFH<sub>D</sub> (mean probability of a dangerous failure per hour)</b> | $6.03 \cdot 10^{-10}$ (EN ISO 13849)                                         |
| <b>T<sub>M</sub> (mission time)</b>                                       | 20 years (EN ISO 13849)                                                      |
| <b>Type</b>                                                               | Type 4 (EN ISO 14119)                                                        |
| <b>Actuator coding level</b>                                              | High coding level (EN ISO 14119)                                             |
| <b>Classification in compliance with IEC/EN 60947-5-3</b>                 | PDF-M                                                                        |
| <b>Safe state in the event of a fault</b>                                 | At least one safety-related semiconductor output (OSSD) is in the OFF state. |

### Functions

|                               |                                       |
|-------------------------------|---------------------------------------|
| <b>Safe series connection</b> | In control cabinet (with diagnostics) |
|-------------------------------|---------------------------------------|

### Interfaces

|                        |         |
|------------------------|---------|
| <b>Connection type</b> | Cable   |
| Length of cable        | 3 m     |
| Cable material         | PVC     |
| Long connecting cable  | ≤ 200 m |
| <b>Status display</b>  | ✓       |

## Electrical data

|                                          |                                               |
|------------------------------------------|-----------------------------------------------|
| <b>Protection class</b>                  | III (EN 50178)                                |
| <b>Classification according to cULus</b> | Class 2                                       |
| <b>Supply voltage V<sub>s</sub></b>      | 24 V DC (20.4 V DC ... 26.4 V DC)             |
| <b>Power consumption</b>                 | ≤ 50 mA                                       |
| <b>Type of output</b>                    | Self-monitoring semiconductor outputs (OSSDs) |
| <b>Output current</b>                    | ≤ 200 mA                                      |
| <b>Response time</b>                     | 45 ms <sup>1)</sup>                           |
| <b>Enable time</b>                       | 360 ms <sup>2)</sup>                          |
| <b>Risk time</b>                         | ≤ 100 ms <sup>3)</sup>                        |
| <b>Switch-on time</b>                    | 2 s <sup>4)</sup>                             |
| <b>Electrical life</b>                   | 10 x 10 <sup>6</sup> switching cycles         |

<sup>1)</sup> In a safe series connection, each downstream safety switch increases the system response time. More response times can be found in the operating instructions.

<sup>2)</sup> Response time on approach to the enable zone.

<sup>3)</sup> Detection time for external faults (e.g., short-circuit or cross-circuit of output signal switching devices). Follow the detailed information in the operating instructions.

<sup>4)</sup> After application of the supply voltage to the safety switch.

## Mechanical data

|                               |                       |
|-------------------------------|-----------------------|
| <b>Design</b>                 | Rectangular           |
| <b>Dimensions (W x H x D)</b> | 25 mm x 88 mm x 20 mm |
| <b>Weight</b>                 | 270 g                 |
| <b>Housing material</b>       | Valox® DR48           |


## Ambient data

|                                      |                                         |
|--------------------------------------|-----------------------------------------|
| <b>Enclosure rating</b>              | IP67 (IEC 60529)<br>IP69K (ISO 20653)   |
| <b>Ambient operating temperature</b> | -25 °C ... +70 °C                       |
| <b>Vibration resistance</b>          | 10 Hz ... 55 Hz, 3.5 mm (IEC 60068-2-6) |
| <b>Shock resistance</b>              | 30 g, 11 ms (EN 60068-2-27)             |


## Classifications

|                     |          |
|---------------------|----------|
| <b>ECI@ss 5.0</b>   | 27272403 |
| <b>ECI@ss 5.1.4</b> | 27272403 |
| <b>ECI@ss 6.0</b>   | 27272403 |
| <b>ECI@ss 6.2</b>   | 27272403 |
| <b>ECI@ss 7.0</b>   | 27272403 |
| <b>ECI@ss 8.0</b>   | 27272403 |
| <b>ECI@ss 8.1</b>   | 27272403 |
| <b>ECI@ss 9.0</b>   | 27272403 |
| <b>ECI@ss 10.0</b>  | 27272403 |
| <b>ECI@ss 11.0</b>  | 27272403 |
| <b>ETIM 5.0</b>     | EC001829 |
| <b>ETIM 6.0</b>     | EC001829 |
| <b>ETIM 7.0</b>     | EC001829 |

### Dimensional drawing (Dimensions in mm (inch))

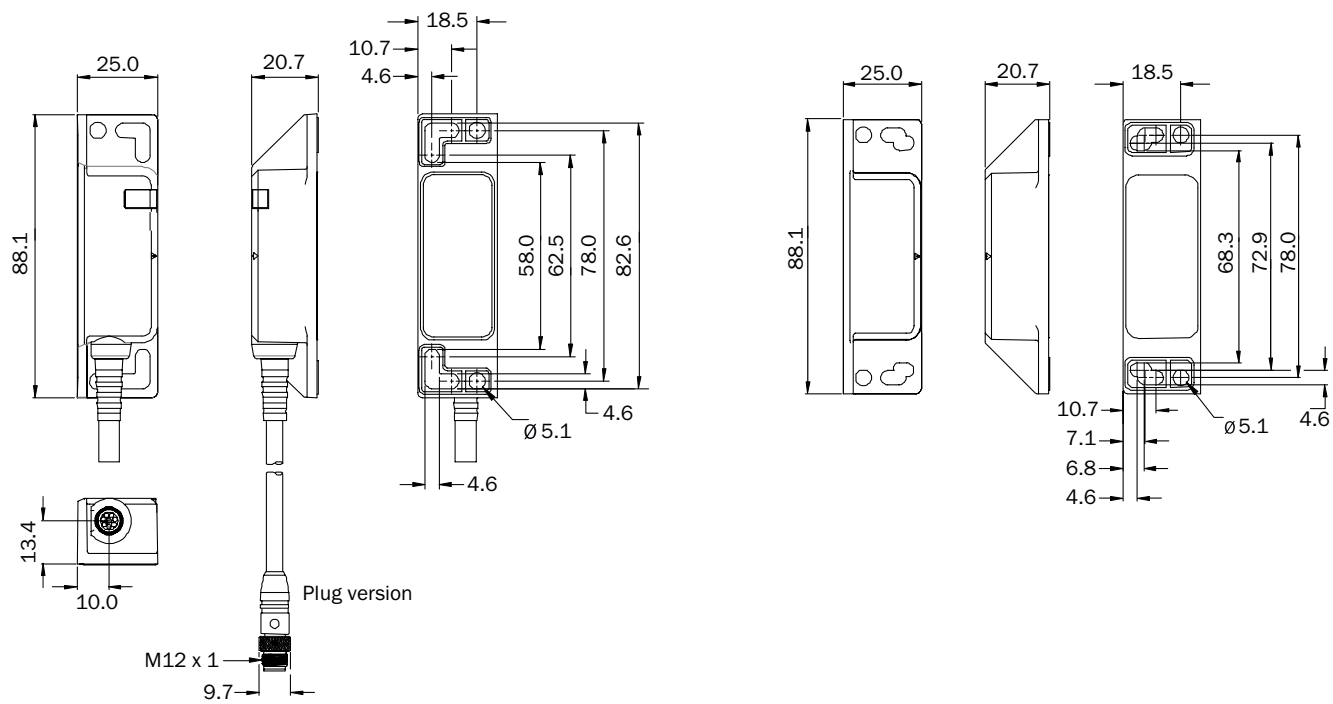


## Response range

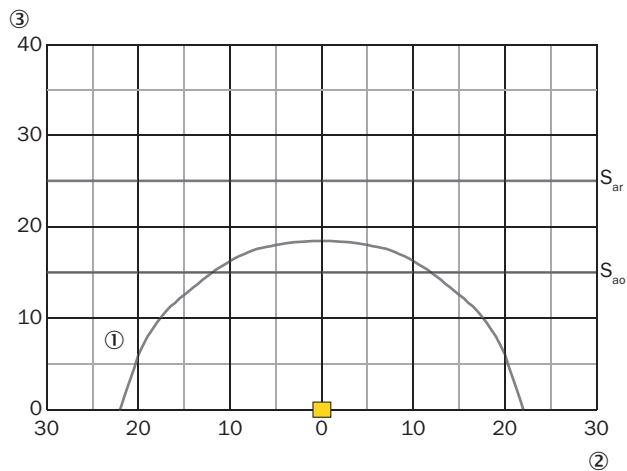

- ① Sensing range
- ② Side deviation in mm
- ③ Distance to sensor surface

## Connection diagram

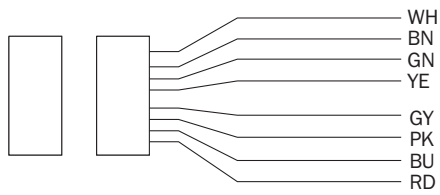

|        |                            |
|--------|----------------------------|
| White  | Aux output (not safe)      |
| Brown  | Voltage supply 24 V DC     |
| Green  | Not connected              |
| Yellow | Enable input for channel B |
| Grey   | Safety output A            |
| Pink   | Safety output B            |
| Blue   | Voltage supply 0 V DC      |
| Red    | Enable input for channel A |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is “Sensor Intelligence.”**

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)