



WLR2100-D2321

ZoneControl

MULTITASK PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.



Illustration may differ



Ordering information

Type	Part no.
WLR2100-D2321	7027809

Other models and accessories → www.sick.com/ZoneControl

Detailed technical data

Features

Logical principle of operation	Block (slug) accumulation
Type of Release	Block (slug) release
Sensor/ detection principle	Photoelectric retro-reflective sensor
Dimensions (W x H x D)	45 mm x 73.7 mm x 48.6 mm
Sensing range max.	0 m ... 9 m
Sensing range	0 m ... 9 m ¹⁾
Type of light	Visible red light
Light source	LED ²⁾
Light spot size (distance)	Ø 205 mm (9 m)
Adjustment	None
Special applications	ZoneControl

¹⁾ Reflector PL80A.

²⁾ Average service life: 100,000 h at T_J = +25 °C.

Mechanics/electronics

Supply voltage	18 V DC ... 30 V DC
Ripple	< 5 V _{pp} ¹⁾
Current consumption	40 mA ²⁾
Switching output	PNP
Switching mode	Light switching
Response time	1 ms

¹⁾ Of V_S.

²⁾ Without load and valve deenergized.

³⁾ A = V_S connections reverse-polarity protected.

⁴⁾ C = interference suppression.

⁵⁾ D = outputs overcurrent and short-circuit protected.

Switching frequency	500 Hz
Connection type	Cable with M12 male connector, 4-pin, 300 mm
Connection type for daisy chain	Cable with receptacle, M12, 4-pin 1 m
Circuit protection	A ³⁾ C ⁴⁾ D ⁵⁾
Protection class	II
Housing material	Plastic, ABS
Enclosure rating	IP67
Shock and vibration resistance	According to IEC 68
Ambient operating temperature	-25 °C ... +55 °C
Ambient storage temperature	-40 °C ... +70 °C
Connection type solenoid valve	Cable, 1 m, with 9.4 mm DIN valve connector

¹⁾ Of V_S .

²⁾ Without load and valve deenergized.

³⁾ A = V_S connections reverse-polarity protected.

⁴⁾ C = interference suppression.

⁵⁾ D = outputs overcurrent and short-circuit protected.

Pneumatic


Connection type solenoid valve	Cable, 1 m, with 9.4 mm DIN valve connector
---------------------------------------	---

Classifications


ECI@ss 5.0	27270902
ECI@ss 5.1.4	27270902
ECI@ss 6.0	27270902
ECI@ss 6.2	27270902
ECI@ss 7.0	27270902
ECI@ss 8.0	27270902
ECI@ss 8.1	27270902
ECI@ss 9.0	27270902
ECI@ss 10.0	27270902
ECI@ss 11.0	27270902
ETIM 5.0	EC002717
ETIM 6.0	EC002717
ETIM 7.0	EC002717
UNSPSC 16.0901	39121528

Connection diagram

Cd-199

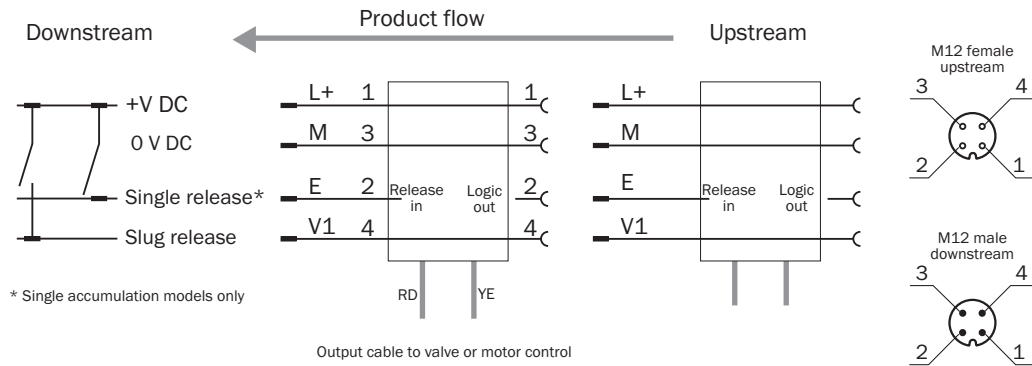

Dimensional drawing (Dimensions in mm (inch))

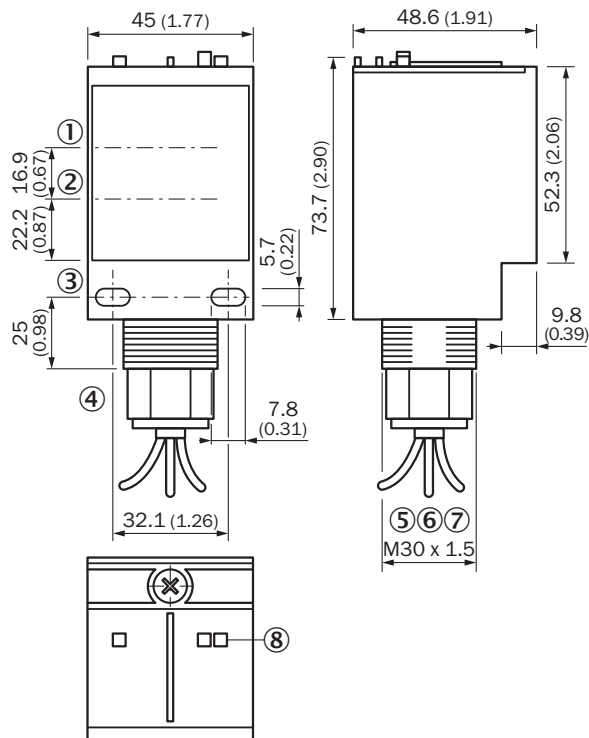

- ① Sender
- ② Receiver
- ③ Fastening threads
- ④ Threaded mounting hole
- ⑤ Series connection, cable with female connector
- ⑥ Cable
- ⑦ Daisy chain connector, male
- ⑧ Status indicator: LED

Recommended accessories

Other models and accessories → www.sick.com/ZoneControl

	Brief description	Type	Part no.
Mounting brackets and plates			
	Mounting bracket, steel, zinc coated, mounting hardware included	BEF-WK-WTR	2051786
	Universal mounting bracket for reflectors, steel, zinc coated	BEF-WN-REFX	2064574
	Mounting bracket, steel, zinc coated, mounting hardware included	BEF-WN-RT/IRT	2074621
Reflectors			
	Rectangular, screw connection, 51 mm x 61 mm, PMMA/ABS, Screw-on, 2 hole mounting	P250	5304812
Plug connectors and cables			
	Head A: female connector, M12, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF2A14-050VB3XLEAX	2096235
	Head A: male connector, M12, 4-pin, straight Head B: - Cable: unshielded	STE-1204-G	6009932

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com