



## Bar code scanners CLV43x / CLV431 / Mid Range

CLV431-6010



**Model Name** > [CLV431-6010](#)  
**Part No.** > [1017982](#)




#### At a glance

- Reliable code recognition in real time using SMART technology
- Immune to ambient light
- Auto setup ensures automatic optimizing of reading performance
- Reflector polling provides automatic triggering
- Profile programming included
- Adjustable scanning frequency up to 800 scans per second

#### Your benefits

- SMART-enhanced read rates enable better performance with damaged or poorly printed codes
- Reliably reads bar codes with up to 30 degrees of tilt, increasing throughput
- No additional trigger light switch necessary due to the reflector polling function, reducing costs
- Extremely easy to configure, shortening commissioning time
- Reliable operation
- Small size and simple setup enables fast installation, even in compact machines
- Parameter cloning plug ensures very short MTTR

**The product is currently being phased out and can be ordered until September 30, 2013. A replacement product can be found under "Replacement Products"**



#### Features

|                                        |                            |
|----------------------------------------|----------------------------|
| Version:                               | Mid Range                  |
| Connection type:                       | Standard                   |
| Reading field:                         | Oscillating mirror         |
| Scanner design:                        | Line scanner               |
| Focus:                                 | Fixed focus                |
| Light source:                          | Visible red light (650 nm) |
| MTBF:                                  | 20,000 h                   |
| Laser class:                           | 2 (DIN EN 60825-1)         |
| Field of view:                         | ≤ 50 °                     |
| Code resolution:                       | 0.25 mm ... 0.5 mm         |
| Reading distance (at code resolution): | 75 mm ... 340 mm (0.5 mm)  |

|                               |                                                                                  |
|-------------------------------|----------------------------------------------------------------------------------|
| Oscillating mirror functions: | Fixed (adjustable position), One shot, Oscillating (variable or fixed amplitude) |
| Oscillation frequency:        | 0.5 Hz ... 4 Hz                                                                  |
| Angle of deflection:          | -20 ° ... 20 ° (can be adjusted via software)                                    |
| Scanning frequency:           | 300 Hz ... 800 Hz                                                                |

## Performance

|                                         |                                                                                                                |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Bar code types:                         | Interleaved 2 of 5, All current code types, Codabar, Code 128, Code 39, Code 93, GS1-128/EAN 128, UPC/GTIN/EAN |
| Print ratio:                            | 2:1 ... 3:1                                                                                                    |
| No. of codes per scan:                  | 1 ... 20 (Standard decoder), 1 ... 6 (SMART decoder)                                                           |
| No. of codes per reading interval:      | 1 ... 50 (auto-discriminating)                                                                                 |
| No. of characters per reading interval: | 500                                                                                                            |
| No. of multiple readings:               | 1 ... 99                                                                                                       |

## Interfaces

|                                                       |                                                                                              |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------|
| Serial (RS-232, RS-422/485):                          | ✓                                                                                            |
| Remark (Serial (RS-232, RS-422/485)):                 | AUX (only RS-232)                                                                            |
| Function (Serial (RS-232, RS-422/485)):               | Host, AUX                                                                                    |
| Data transmission rate (Serial (RS-232, RS-422/485)): | 300 Baud ... 57,600 Baud, AUX: 9,600 Baud                                                    |
| Ethernet:                                             | ✓                                                                                            |
| Remark (Ethernet):                                    | Optional via external connection module (CDM + CMF)                                          |
| CAN bus:                                              | ✓                                                                                            |
| Function (CAN bus):                                   | SICK CAN sensor network (Master/Slave, Multiplexer)                                          |
| Protocol (CAN bus):                                   | CANopen, CSN (SICK CAN Sensor Network)                                                       |
| Data transmission rate (CAN bus):                     | 10 kbit/s ... 1 Mbit/s                                                                       |
| PROFIBUS DP:                                          | ✓                                                                                            |
| Remark (PROFIBUS DP):                                 | Optional via external connection module (CDM + CMF)                                          |
| EtherCAT:                                             | -                                                                                            |
| DeviceNet:                                            | ✓                                                                                            |
| Remark (DeviceNet):                                   | Optional via external connection module (CDM + CMF)                                          |
| Switching inputs:                                     | 2 ("Sensor 1", "Sensor 2")                                                                   |
| Switching outputs:                                    | 2 ("Result 1", "Result 2")                                                                   |
| Reading pulse:                                        | Non-powered, Reflector polling, "Sensor 1" switching input, Serial interface                 |
| Optical indicators:                                   | 4 LEDs (function indicator)                                                                  |
| Acoustic indicators:                                  | Beeper/buzzer (can be switched off, can be allocated as a result status indication function) |

## Mechanics/electronics

|                        |                                                                     |
|------------------------|---------------------------------------------------------------------|
| Electrical connection: | 1 15-pin D-Sub HD plug (0.9 m)                                      |
| Operating voltage:     | 10 V DC ... 30 V DC <sup>1)</sup>                                   |
| Power consumption:     | 6.15 W                                                              |
| Housing:               | Die-cast zinc, does not contain paint wetting impairment substances |
| Housing color:         | Light blue (RAL 5012)                                               |
| Enclosure rating:      | IP 65 (EN 60529 (1991-10))                                          |
| Protection class:      | III (EN 61140 (2002-03))                                            |
| Weight:                | 620 g, with connecting cable                                        |
| Dimensions:            | 99.8 mm x 92.2 mm x 37.8 mm                                         |

<sup>1)</sup> UL certified for use with a Class 2 mains supply unit (checked to UL 1310)


## Ambient data

|                                      |                                                   |
|--------------------------------------|---------------------------------------------------|
| Electromagnetic compatibility (EMC): | (EN 61000-6-2 (2001-10)) (EN 61000-6-4 (2001-10)) |
| Vibration resistance:                | (IEC 60068-2-27 (1993))                           |
| Shock resistance:                    | (IEC 600682-6 (1995))                             |
| Ambient operating temperature:       | 0 °C ... 40 °C                                    |
| Storage temperature:                 | -20 °C ... 70 °C                                  |
| Permissible relative humidity:       | ± 90 %, non-condensing                            |
| Ambient light safety:                | 2,000 lx, on bar code                             |
| Bar code print contrast (PCS):       | ≥ 60 %                                            |

## General notes

|                   |                                      |
|-------------------|--------------------------------------|
| Life cycle phase: | Available until September 30th, 2013 |
|-------------------|--------------------------------------|

## Dimensional drawing

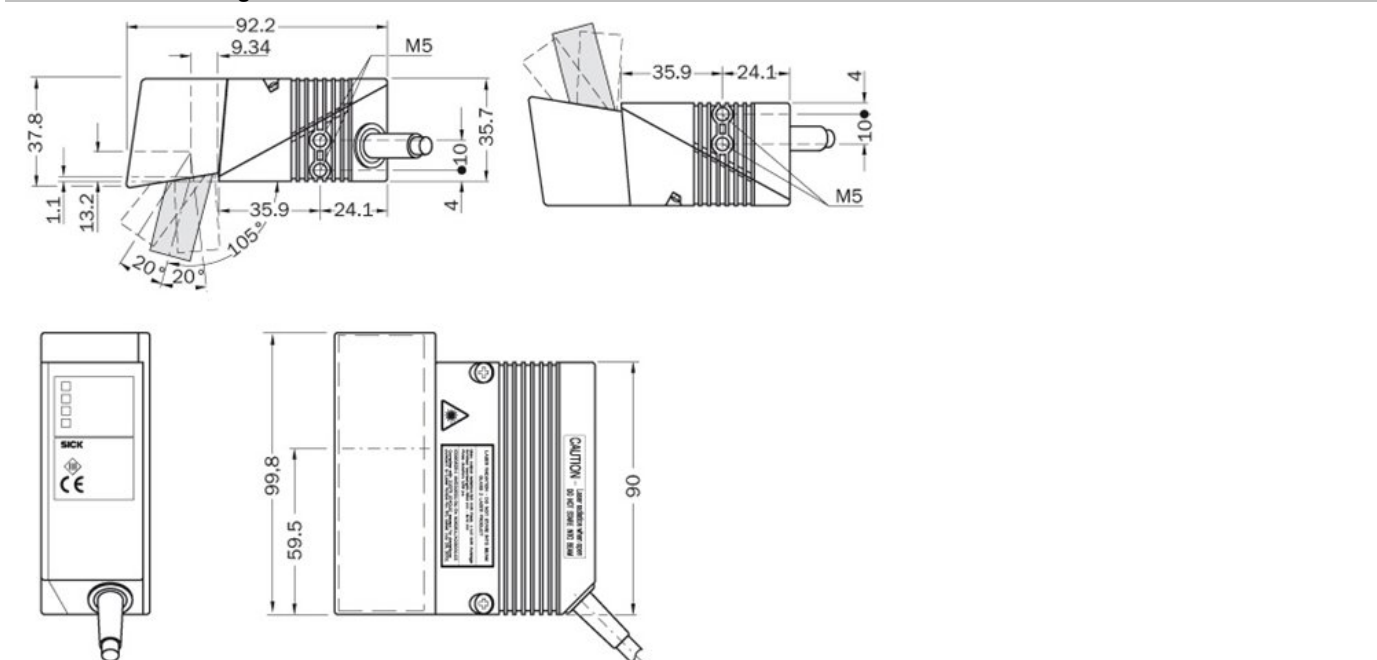

#### **Australia**

Phone +61 3 9457 0600  
1800 334 802 – tollfree  
E-Mail sales@sick.com.au

#### **Belgium/Luxembourg**

Phone +32 (0)2 466 55 66  
E-Mail info@sick.be

#### **Brasil**

Phone +55 11 3215-4900  
E-Mail sac@sick.com.br

#### **Canada**

Phone +1 905 771 14 44  
E-Mail information@sick.com

#### **Ceská Republika**

Phone +420 2 57 91 18 50  
E-Mail sick@sick.cz

#### **China**

Phone +86 4000 121 000  
E-Mail info.china@sick.net.cn  
Phone +852-2153 6300  
E-Mail ghk@sick.com.hk

#### **Danmark**

Phone +45 45 82 64 00  
E-Mail sick@sick.dk

#### **Deutschland**

Phone +49 211 5301-301  
E-Mail kundenservice@sick.de

#### **España**

Phone +34 93 480 31 00  
E-Mail info@sick.es

#### **France**

Phone +33 1 64 62 35 00  
E-Mail info@sick.fr

#### **Great Britain**

Phone +44 (0)1727 831121  
E-Mail info@sick.co.uk

#### **India**

Phone +91-22-4033 8333  
E-Mail info@sick-india.com

#### **Israel**

Phone +972-4-6801000  
E-Mail info@sick-sensors.com

#### **Italia**

Phone +39 02 27 43 41  
E-Mail info@sick.it

#### **Japan**

Phone +81 (0)3 3358 1341  
E-Mail support@sick.jp

#### **Magyarország**

Phone +36 1 371 2680  
E-Mail office@sick.hu

#### **Nederlands**

Phone +31 (0)30 229 25 44  
E-Mail info@sick.nl

#### **Norge**

Phone +47 67 81 50 00  
E-Mail austefjord@sick.no

#### **Österreich**

Phone +43 (0)22 36 62 28 8-0  
E-Mail office@sick.at

#### **Polska**

Phone +48 22 837 40 50  
E-Mail info@sick.pl

#### **România**

Phone +40 356 171 120  
E-Mail office@sick.ro

#### **Russia**

Phone +7-495-775-05-30  
E-Mail info@sick.ru

#### **Schweiz**

Phone +41 41 619 29 39  
E-Mail contact@sick.ch

#### **Singapore**

Phone +65 6744 3732  
E-Mail admin@sicksgp.com.sg

#### **Slovenija**

Phone +386 (0)1-47 69 990  
E-Mail office@sick.si

#### **South Africa**

Phone +27 11 472 3733  
E-Mail info@sickautomation.co.za

#### **South Korea**

Phone +82 2 786 6321/4  
E-Mail info@sickkorea.net

#### **Suomi**

Phone +358-9-25 15 800  
E-Mail sick@sick.fi

#### **Sverige**

Phone +46 10 110 10 00  
E-Mail info@sick.se

#### **Taiwan**

Phone +886-2-2375-6288  
E-Mail sales@sick.com.tw

#### **Türkiye**

Phone +90 (216) 528 50 00  
E-Mail info@sick.com.tr

#### **United Arab Emirates**

Phone +971 (0) 4 8865 878  
E-Mail info@sick.ae

#### **USA/México**

Phone +1(952) 941-6780  
1 800-325-7425 – tollfree  
E-Mail info@sickusa.com

More representatives and agencies  
at [www.sick.com](http://www.sick.com)