



## Incremental encoders DBS36

DBS36E-S3AJ01000



**Model Name** > DBS36E-S3AJ01000  
**Part No.** > 1061241



*Illustration may differ*

#### At a glance

- Connection with universal cable outlet
- Versions with blind hollow shaft or face mount flange with solid shaft
- Face mount flange with 3 mounting hole patterns and servo groove
- Hollow shaft with universal stator coupling
- Compact diameter of 37 mm
- Electrical interfaces: TTL/RS-422, HTL/push pull and Open Collector NPN
- Available PPR: 100 to 2,500
- Temperature range: -20 °C ... +85 °C
- Enclosure rating: IP 65

#### Your benefits

- The universal cable outlet allows use in tight spaces and makes flexible cable routing possible
- Face mount flange with various mounting hole patterns provides flexibility when mounting in new or existing applications
- Face mount flange with servo groove makes mounting with servo clamps possible
- The DBS36E's universal stator coupling ensures easy device replacement without changing the application
- The high flexibility of the encoders' mechanical interface and the available accessories make it possible to use one design in many applications
- Compatibility with the DDS36E series makes it easy to replace this series in existing applications



#### Performance

|                        |                             |
|------------------------|-----------------------------|
| Error limits:          | ± 54 ° (/pulses)            |
| Measuring step:        | 90 ° /electronically/pulses |
| Initialization time:   | < 3 ms                      |
| Pulses per revolution: | 1,000                       |

#### Mechanical data

|                                 |                                 |
|---------------------------------|---------------------------------|
| Mechanical interface:           | Solid shaft, Face mount flange  |
| Shaft diameter:                 | 6 mm x 12 mm                    |
| Start up torque:                | 0.5 Ncm (20 °C)                 |
| Operating torque:               | 0.4 Ncm (20 °C)                 |
| Maximum operating speed:        | 8,000 U/min <sup>1)</sup>       |
| Moment of inertia of the rotor: | 0.6 gcm <sup>2</sup>            |
| Bearing lifetime:               | 2 x 10 <sup>9</sup> revolutions |

|                                         |                             |
|-----------------------------------------|-----------------------------|
| Max. angular acceleration:              | 500,000 rad/s <sup>2</sup>  |
| Permissible shaft loading radial/axial: | 20 N (axial), 40 N (radial) |
| Operating speed:                        | 6,000 /min <sup>2)</sup>    |

<sup>1)</sup> No permanent operation. Decreasing signal quality. <sup>2)</sup> Self-warming 3.3 K per 1,000 1/min

## Electrical data

---

|                                        |                                                            |
|----------------------------------------|------------------------------------------------------------|
| Electrical interface:                  | 4.5 V ... 5.5 V, TTL/RS422, Cable, 8-pin, universal, 0.5 m |
| Connection type:                       | Cable, 8-pin, universal, 0.5 m                             |
| Maximum output frequency:              | 300 kHz                                                    |
| Reference signal, number:              | 1                                                          |
| Reference signal, position:            | 90 °, electronically, gated with A and B                   |
| Operating voltage range:               | 4.5 V ... 5.5 V                                            |
| Load current max.:                     | 30 mA                                                      |
| Power consumption:                     | Without load                                               |
| MTTFd: mean time to dangerous failure: | 600 a (EN ISO 13849-1) <sup>1)</sup>                       |

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive.

Calculation based on nominal load of components, average ambient

temperature 40°C, frequency of use 8760 h/a. All


electronic failures are considered hazardous. For more information, see document no. 8015532.

## Ambient data

---

|                                |                                                           |
|--------------------------------|-----------------------------------------------------------|
| EMC:                           | (according to EN 61000-6-2 and EN 61000-6-4 (class A))    |
| Working temperature range:     | -20 °C ... 85 °C                                          |
| Storage temperature range:     | -40 °C ... 100 °C, without package                        |
| Resistance to shocks:          | 100 g (EN 60068-2-27)                                     |
| Resistance to vibration:       | 20 g, 10 Hz ... 2,000 Hz (EN 60068-2-6)                   |
| Enclosure rating:              | IP 65                                                     |
| Permissible relative humidity: | 90 % (condensation of the optical scanning not permitted) |

Dimensional drawing

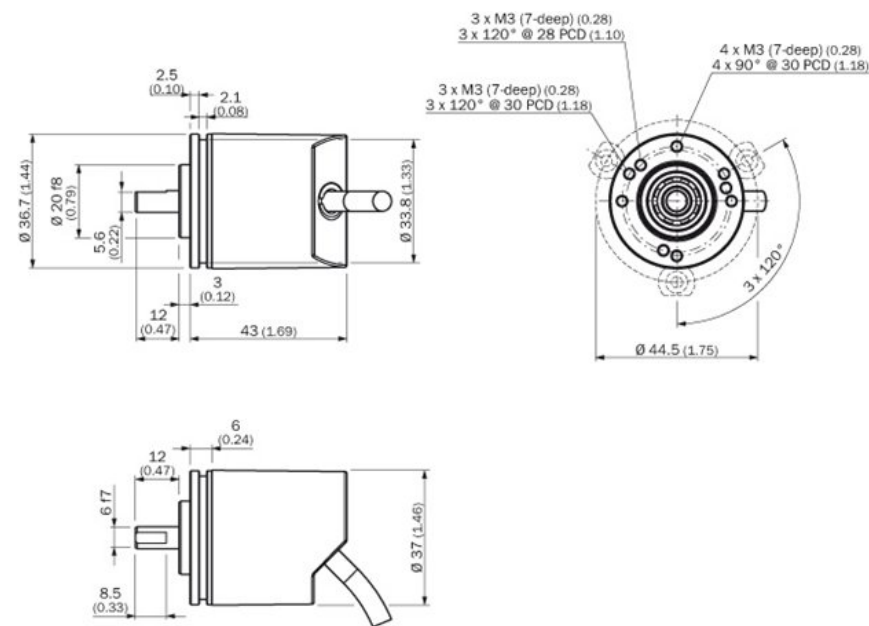


8-core cable

View of M12 device connector on cable



View of M12 device connector on cable



| Colour of wires | Pin 12-pole in M12 | Pin 12-pole in M23 | Signal OC     | Signal TTL; HTL | Explanation                                   |
|-----------------|--------------------|--------------------|---------------|-----------------|-----------------------------------------------|
| Brown           | 1                  | 6                  | Not connected | A-              | Signal line                                   |
| White           | 2                  | 5                  | A             | A               | Signal line                                   |
| Black           | 3                  | 1                  | Not connected | B-              | Signal line                                   |
| Pink            | 4                  | 8                  | B             | B               | Signal line                                   |
| Yellow          | 5                  | 4                  | Not connected | Z-              | Signal line                                   |
| Lilac           | 6                  | 3                  | Z             | Z               | Signal line                                   |
| Blue            | 7                  | 10                 | GND           | GND             | Ground connection of the Encoder              |
| Red             | 8                  | 12                 | +Us           | +Us             | Supply voltage                                |
| -               | -                  | 9                  | Not connected | Not connected   | Not connected                                 |
| -               | -                  | 2                  | Not connected | Not connected   | Not connected                                 |
| -               | -                  | 11                 | Not connected | Not connected   | Not connected                                 |
| -               | -                  | 7                  | Not connected | Not connected   | Not connected                                 |
| Screen          | Screen             | Screen             | Screen        | Screen          | Screen (Screen connected to Encoder housing.) |



**Australia**

Phone +61 3 9457 0600  
1800 334 802 – tollfree  
E-Mail sales@sick.com.au

**Belgium/Luxembourg**

Phone +32 (0)2 466 55 66  
E-Mail info@sick.be

**Brasil**

Phone +55 11 3215-4900  
E-Mail sac@sick.com.br

**Canada**

Phone +1 905 771 14 44  
E-Mail information@sick.com

**Ceská Republika**

Phone +420 2 57 91 18 50  
E-Mail sick@sick.cz

**China**

Phone +86 4000 121 000  
E-Mail info.china@sick.net.cn  
Phone +852-2153 6300  
E-Mail ghk@sick.com.hk

**Danmark**

Phone +45 45 82 64 00  
E-Mail sick@sick.dk

**Deutschland**

Phone +49 211 5301-301  
E-Mail kundenservice@sick.de

**España**

Phone +34 93 480 31 00  
E-Mail info@sick.es

**France**

Phone +33 1 64 62 35 00  
E-Mail info@sick.fr

**Great Britain**

Phone +44 (0)1727 831121  
E-Mail info@sick.co.uk

**India**

Phone +91-22-4033 8333  
E-Mail info@sick-india.com

**Israel**

Phone +972-4-6801000  
E-Mail info@sick-sensors.com

**Italia**

Phone +39 02 27 43 41  
E-Mail info@sick.it

**Japan**

Phone +81 (0)3 3358 1341  
E-Mail support@sick.jp

**Magyarország**

Phone +36 1 371 2680  
E-Mail office@sick.hu

**Nederlands**

Phone +31 (0)30 229 25 44  
E-Mail info@sick.nl

**Norge**

Phone +47 67 81 50 00  
E-Mail austefjord@sick.no

**Österreich**

Phone +43 (0)22 36 62 28 8-0  
E-Mail office@sick.at

**Polska**

Phone +48 22 837 40 50  
E-Mail info@sick.pl

**România**

Phone +40 356 171 120  
E-Mail office@sick.ro

**Russia**

Phone +7-495-775-05-30  
E-Mail info@sick.ru

**Schweiz**

Phone +41 41 619 29 39  
E-Mail contact@sick.ch

**Singapore**

Phone +65 6744 3732  
E-Mail admin@sicksgp.com.sg

**Slovenija**

Phone +386 (0)1-47 69 990  
E-Mail office@sick.si

**South Africa**

Phone +27 11 472 3733  
E-Mail info@sickautomation.co.za

**South Korea**

Phone +82 2 786 6321/4  
E-Mail info@sickkorea.net

**Suomi**

Phone +358-9-25 15 800  
E-Mail sick@sick.fi

**Sverige**

Phone +46 10 110 10 00  
E-Mail info@sick.se

**Taiwan**

Phone +886-2-2375-6288  
E-Mail sales@sick.com.tw

**Türkiye**

Phone +90 (216) 528 50 00  
E-Mail info@sick.com.tr

**United Arab Emirates**

Phone +971 (0) 4 8865 878  
E-Mail info@sick.ae

**USA/México**

Phone +1(952) 941-6780  
1 800-325-7425 – tollfree  
E-Mail info@sickusa.com

More representatives and agencies  
at [www.sick.com](http://www.sick.com)