



## Long range distance sensors DME5000, DeviceNet

DME5000-314



**Model Name** > [DME5000-314](#)  
**Part No.** > [1026002](#)




#### At a glance

- Measurement range from 0.15 m to 300 m
- Very fast measurement cycles
- Highest accuracy, repeatability and system availability
- Illuminated LC display with diagnostic information
- Visible red light and bracket with springs for alignment
- Variety of interfaces: SSI, RS-422, PROFIBUS, HIPERFACE, DeviceNet

#### Your benefits

- Fastest measurement rate offers optimized integration into control loops for increased productivity
- Red laser light as well as adjustable mounting brackets (optional accessory) enable fast and easy alignment, ensuring on-time and cost-effective installation
- Multi-point self checks provide maintenance and replacement warnings increasing overall machine availability
- A tough, metal housing as well as heating and cooling accessories ensure reliability in rough ambient conditions
- User-friendly display with easy-to-use menu along with external PC/PLC programming offers fast and cost-efficient setup
- Multiple serial interfaces provide high-speed position output to the controller and high flexibility in application integration
- Integrated speed monitoring offers additional information for increased process reliability
- Highest degree of accuracy and repeatability ensures high machine availability



#### Performance

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Measuring range <sup>1)</sup> :               | 0.15 m ... 300 m, on Diamond Grade                         |
| Resolution:                                   | 0.05 mm ... 5 mm                                           |
| Repeatability <sup>2)</sup> , <sup>3)</sup> : | 2 mm                                                       |
| Accuracy:                                     | ± 5 mm                                                     |
| Light source <sup>4)</sup> :                  | Laser, red                                                 |
| Laser protection class:                       | 2 (EN 60825-1/CDRH)                                        |
| Typ. light spot size (distance):              | 130 mm (at 70 m)<br>270 mm (at 150 m)<br>360 mm (at 220 m) |
| Output rate:                                  | 2 ms                                                       |
| Max. movement speed:                          | 10 m/s                                                     |

1) 2) On Diamond Grade 3) Statistical error 1  $\sigma$ , environmental conditions constant, min. warm-up time 10 min 4) Average service life of 50,000 h at  $T_A = +25\text{ }^{\circ}\text{C}$

## Interfaces

Data interface: DeviceNet  
Output type <sup>1)</sup>: Push-pull: PNP/NPN (100 mA)  
Multifunctional input <sup>2)</sup>: <sup>3)</sup>: 1 x MF

<sup>1)</sup> HIGH =  $> V_S - 3\text{ V}$  / LOW =  $< 2\text{ V}$  <sup>2)</sup> HIGH =  $> 12\text{ V}$  / LOW =  $< 3\text{ V}$  <sup>3)</sup> Not reverse-polarity protected

## Mechanics/electronics

Supply voltage  $V_S$ : DC 18 V ... 30 V, limit values  
Ripple <sup>1)</sup>:  $< 5\text{ Vpp}$   
Initialization time <sup>2)</sup>: 1.5 s  
Indication: Display  
Weight: Ca. 1,650 g  
Output current  $I_A$  <sup>3)</sup>:  $\leq 100\text{ mA}$   
Power consumption: At 24 V DC  $< 250\text{ mA}$   
Connection type: Plug 1 x M12, 4-pin, A-coded, 1 x M16, 8-pin


<sup>1)</sup> May not fall short of or exceed  $V_S$  tolerances <sup>2)</sup> After loss of reflector  $< 1\text{ s}$  at max. speed  $V_{\text{max}} < 1\text{ m/s}$  <sup>3)</sup> Short circuit/overload protected. Max. 100 nF/20 mH

## Ambient data

Enclosure rating: IP 65  
Protection class <sup>1)</sup>: II  
EMC: EN 61000-6-2, EN 55011  
Effect of air pressure: 0.3 ppm/hPa  
Effect of air temperature: 1 ppm/K  
Temperature drift: Typ. 0.1 mm/K  
Ambient temperature: Operation:  $-10 \dots 55\text{ }^{\circ}\text{C}$   
Operation with cooling case:  $-10 \dots 75\text{ }^{\circ}\text{C}$   
Storage:  $-25 \dots 75\text{ }^{\circ}\text{C}$   
Mechanical load: Noise: EN 600 68-2-64  
Shock: EN 600 68-2-27/-2-29  
Sine: EN 600 68-2-6


<sup>1)</sup> Reference voltage DC 32 V

Dimensional drawing

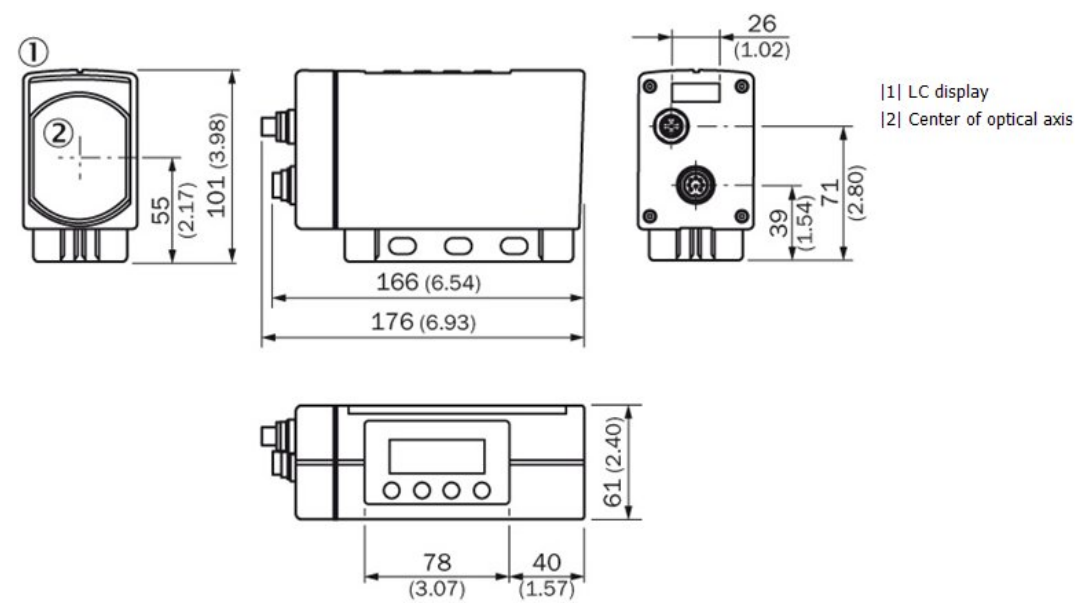


All dimensions in mm (inch)

Adjustments

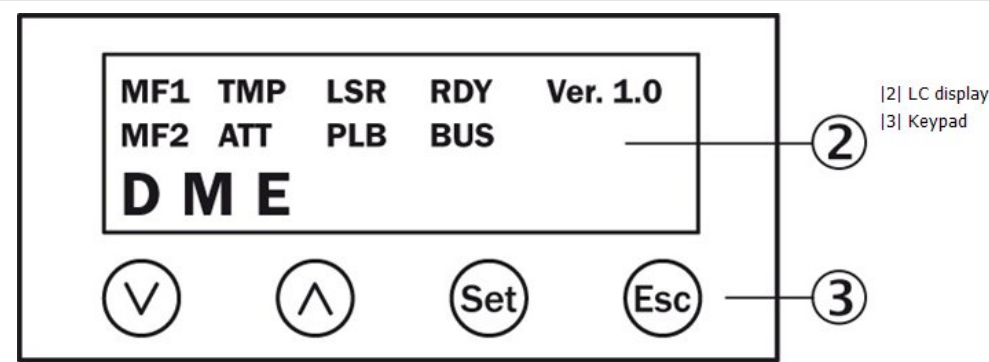


## Connection type

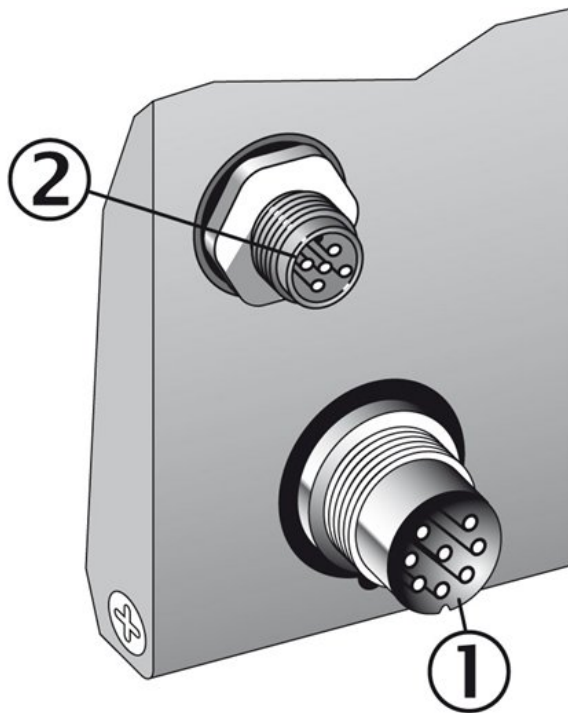

- |1| Connector M16, 8-pin
- |2| Connector M12, 5-pin, A-coded

## Connection diagram

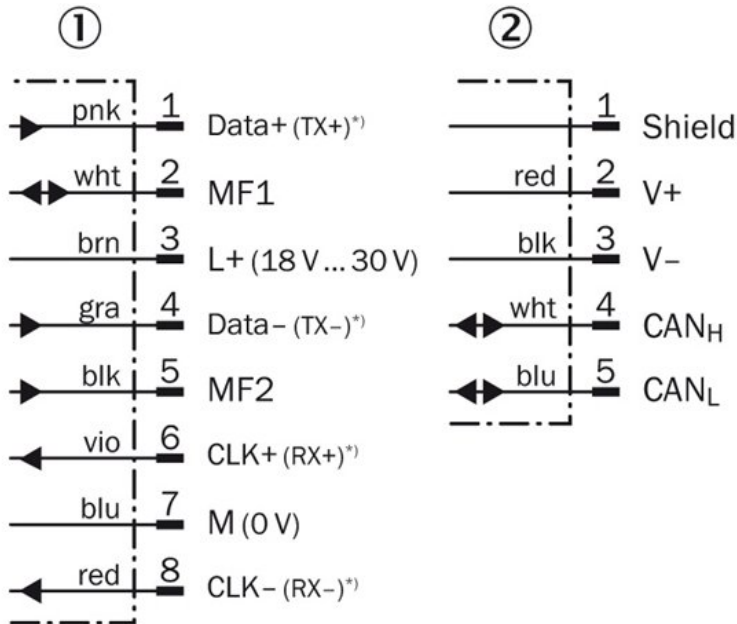

- |1| Connector M16, 8-pin
- |2| Connector M12, 5-pin, A-coded

<sup>\*)</sup> For connection of interface adapter.

#### **Australia**

Phone +61 3 9457 0600  
1800 334 802 – tollfree  
E-Mail sales@sick.com.au

#### **Belgium/Luxembourg**

Phone +32 (0)2 466 55 66  
E-Mail info@sick.be

#### **Brasil**

Phone +55 11 3215-4900  
E-Mail sac@sick.com.br

#### **Canada**

Phone +1 905 771 14 44  
E-Mail information@sick.com

#### **Ceská Republika**

Phone +420 2 57 91 18 50  
E-Mail sick@sick.cz

#### **China**

Phone +86 4000 121 000  
E-Mail info.china@sick.net.cn  
Phone +852-2153 6300  
E-Mail ghk@sick.com.hk

#### **Danmark**

Phone +45 45 82 64 00  
E-Mail sick@sick.dk

#### **Deutschland**

Phone +49 211 5301-301  
E-Mail kundenservice@sick.de

#### **España**

Phone +34 93 480 31 00  
E-Mail info@sick.es

#### **France**

Phone +33 1 64 62 35 00  
E-Mail info@sick.fr

#### **Great Britain**

Phone +44 (0)1727 831121  
E-Mail info@sick.co.uk

#### **India**

Phone +91-22-4033 8333  
E-Mail info@sick-india.com

#### **Israel**

Phone +972-4-6801000  
E-Mail info@sick-sensors.com

#### **Italia**

Phone +39 02 27 43 41  
E-Mail info@sick.it

#### **Japan**

Phone +81 (0)3 3358 1341  
E-Mail support@sick.jp

#### **Magyarország**

Phone +36 1 371 2680  
E-Mail office@sick.hu

#### **Nederlands**

Phone +31 (0)30 229 25 44  
E-Mail info@sick.nl

#### **Norge**

Phone +47 67 81 50 00  
E-Mail austefjord@sick.no

#### **Österreich**

Phone +43 (0)22 36 62 28 8-0  
E-Mail office@sick.at

#### **Polska**

Phone +48 22 837 40 50  
E-Mail info@sick.pl

#### **România**

Phone +40 356 171 120  
E-Mail office@sick.ro

#### **Russia**

Phone +7-495-775-05-30  
E-Mail info@sick.ru

#### **Schweiz**

Phone +41 41 619 29 39  
E-Mail contact@sick.ch

#### **Singapore**

Phone +65 6744 3732  
E-Mail admin@sicksgp.com.sg

#### **Slovenija**

Phone +386 (0)1-47 69 990  
E-Mail office@sick.si

#### **South Africa**

Phone +27 11 472 3733  
E-Mail info@sickautomation.co.za

#### **South Korea**

Phone +82 2 786 6321/4  
E-Mail info@sickkorea.net

#### **Suomi**

Phone +358-9-25 15 800  
E-Mail sick@sick.fi

#### **Sverige**

Phone +46 10 110 10 00  
E-Mail info@sick.se

#### **Taiwan**

Phone +886-2-2375-6288  
E-Mail sales@sick.com.tw

#### **Türkiye**

Phone +90 (216) 528 50 00  
E-Mail info@sick.com.tr

#### **United Arab Emirates**

Phone +971 (0) 4 8865 878  
E-Mail info@sick.ae

#### **USA/México**

Phone +1(952) 941-6780  
1 800-325-7425 – tollfree  
E-Mail info@sickusa.com

More representatives and agencies  
at [www.sick.com](http://www.sick.com)