



Hand-held scanners IDM240 / IDM240 Corded / general purpose / High Density

IDM240-1H



Model Name > [IDM240-1H](#)
Part No. > [6050646](#)

At a glance

- Identification of all current 1D, stacked, and 2D codes
- Reliable, secure, and fast code reading
- Compact design, weighs only 150 g
- Manual operation and hands-free operation in presentation mode

Your benefits

- Only one device for a wide range of different code types
- Fast and accurate identification without manual data entry
- Simple and ergonomic operation, even in scanning-intensive applications
- Flexible application possibilities due to various operating options



Features

Field of application:	General purpose
Version:	High Density
Scanner design:	2D code hand-held scanner
Light source:	Lighting LEDs: visible red light (630 nm)
Code resolution::	≥0.08 mm, ≥0.13 mm ^{1) 2)}
Reading distance (at code resolution):	35 mm ... 90 mm (0.13 mm) ³⁾
Scanning frequency:	60 Hz

¹⁾ Valid for Code 39 ^{2) 3)} Valid for Data Matrix code

Performance

Supported code type:	1D, 2D, Stacked
Bar code types:	Australian Post, China Post, German Post, US Planet, US Postnet, British Post, Intelligent Mail, Japan Post, Korean Post, Dutch KIX Post, Codabar, Code 128, Code 39, Code 93, Interleaved 2 of 5, RSS, UPC/GTIN/EAN
2D code types:	Aztec, Data Matrix, MicroQR-Code, QR code
Stacked code types:	Codablock, Code 16K, Code 49, Composite, MicroPDF417, PDF417

Interfaces

Serial:	✓
Function (Serial):	RS-232 TTL
Ethernet:	✓

Protocol (Ethernet):	TCP/IP (optional via external connection module CDM + CMF), PROFINET (optional via external connection module CDF600-2)
CAN bus:	-
PROFIBUS DP:	✓
Remark (PROFIBUS DP):	Optional via external connection module (CDF600-2)
DeviceNet:	✓
Remark (DeviceNet):	Optional via external connection module (CDM + CMF)
PS/2:	✓
Function (PS/2):	Keyboard wedge
USB:	✓
Function (USB):	Keyboard wedge, COM-Port emulation
Optical indicators:	2 LEDs (operational status, good read)
Acoustic indicators:	Beeper, disengageable
Vibration:	No


Mechanics/electronics

Operating voltage:	5 V DC± 5 %
Power consumption:	Operation: Typ. 285 mA, Standby: Typ. 160 mA
Housing color:	Gray, Black
Enclosure rating:	IP 41
Weight:	152 g, without cable
Dimensions:	95 mm x 70.5 mm x 161.7 mm

Ambient data

Shock resistance:	25 drops From 1.8 m height on concrete
Ambient operating temperature:	-10 °C ... 50 °C
Storage temperature:	-40 °C ... 70 °C
Permissible relative humidity:	95 %, non-condensing
Ambient light safety:	100,000 lx

Code resolution in mm (mil)

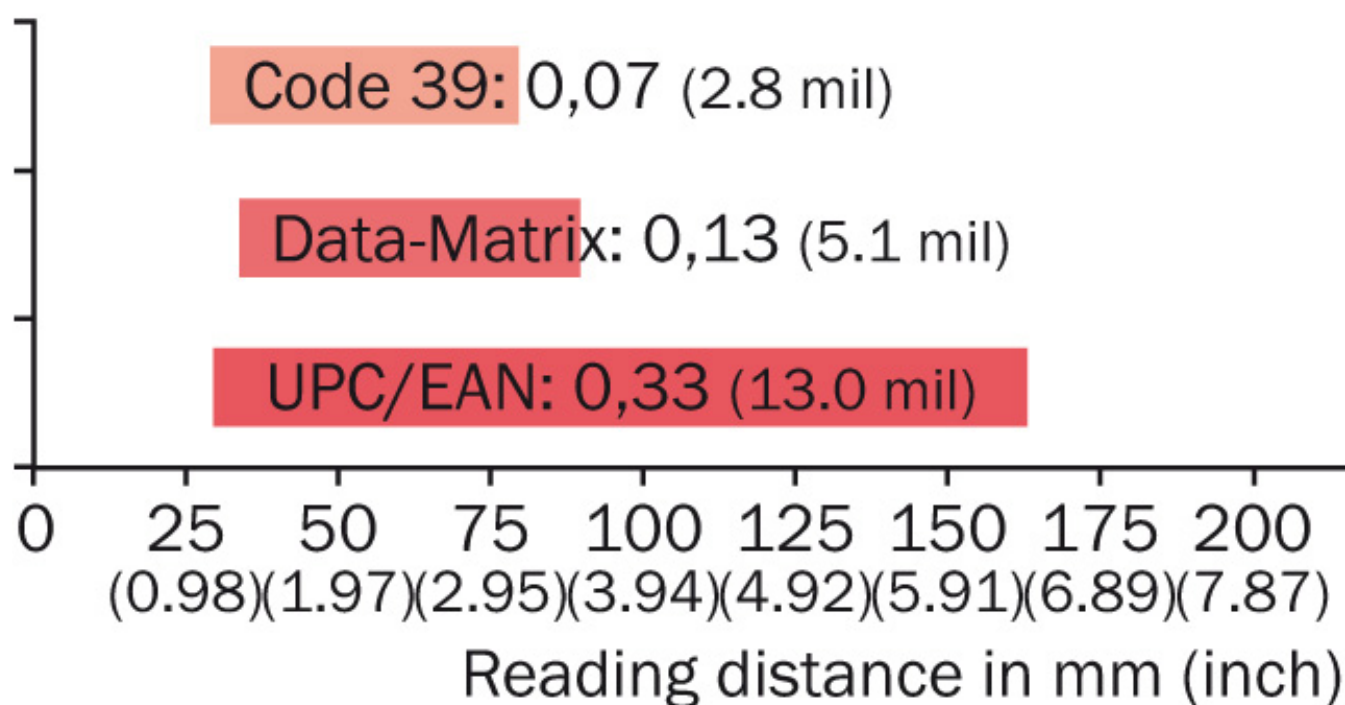

Australia

Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6801000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com