

IM12-10NPS-ZC1







Inductive proximity sensors Cylindrical threaded housing, IM12

Model Name > IM12-10NPS-ZC1

Part No. > 6027514





At a glance

- Triple operating distance up to 10 mm
- Operating temperature from -25 °C to +70 °C
- · High switching frequencies
- Sizes M12

Your benefits

- Reduced machine downtime and maintenance costs
- Large operating reserve due to triple operating distance improves machine throughput - no missed targets
- Saves installation space on the machine. Less space required for the same operating distance when compared with standard sensors
- Lower risk of mechanical damage due their ability to be mounted further from the target
- High level of sensitivity makes them suitable for detecting difficult parts such as wires, thin sheets, small screws – reduces design and installation time



Features

Housing: Cylindrical Thread size: M12 x 1 Sensing range Sn: 10 mm Assured sensing range Sa: 8.1 mm Installation type: Non-flush 400 Hz Switching frequency: **PNP** Output type: Output function: NO Electrical wiring: DC 3-wire IP 67 1) Enclosure rating:

Connection type: Connector M12, 4-pin

Housing: Standard

1) According to EN 60529

Mechanics/electronics

Supply voltage: $10 \text{ V DC } \dots 30 \text{ V DC}$ Ripple: $\leq 10 \% \frac{1}{2}$

Voltage drop: $\leq 2 \text{ V}^{2}$ Power consumption: $\leq 10 \text{ mA}^{3}$ Time delay before availability: \leq 50 ms

Hysteresis: 1% ... 15%Repeatability:: \leq 5 % $^{4)} 5)$ Temperature drift (% of Sr): \pm 10 %

EMC: According to EN 60947-5-2

Output current la: ≤ 200 mA

Short-circuit protection:

Reverse polarity protection:

Power-up pulse protection:

Shock/vibration: 30 g, 11 ms/10 ... 55 Hz, 1 mm

Adjustment indicator: -

Ambient operating temperature: -25 °C ... 70 °C

Housing material: Metal, Chrome-plated brass

Housing cap material: Plastic, PBTP

Housing length: 60 mm
Thread length: 35 mm
Tightening torque, max.: 10 Nm

1) Of V $_{S}^{2}$ At I $_{a}$ max $_{a}^{3}$ Without load $_{a}^{4}$ Of Sr $_{b}^{5}$ UB = 20 V DC ... 30 V DC, TA = 23 °C ± 5 °C $_{b}^{6}$ LED lights continuously (0 ≤ s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s ≤ 0.8 Sr); LED flashing (0.8 Sr < s


Reduction factors

Note: The values are reference values which may vary
Stainless steel (V2A, 304): Ca. 0.77
Copper (Cu): Ca. 0.45
Aluminum (Al): Ca. 0.49
Brass (Br): Ca. 0.56


Installation note

A: 10 mm
B: 30 mm
C: 12 mm
D: 30 mm
E: 10 mm

Remark: Associated graphic see "Installation"

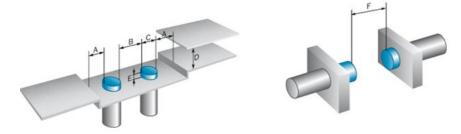


Dimensional drawing

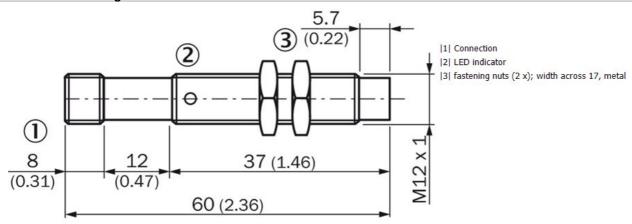


All dimensions in mm (inch)

Connection diagram

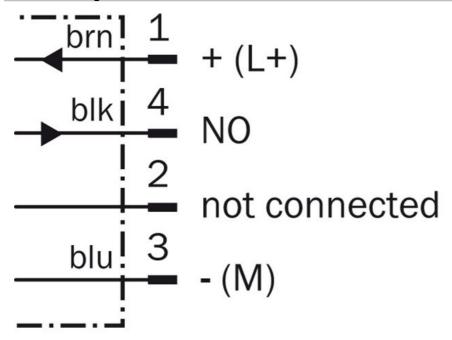

Connection type



Phone +61 3 9457 0600 1800 334 802 - tollfree

E-Mail sales@sick.com.au

Belgium/Luxembourg Phone +32 (0)2 466 55 66

E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900 E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44 E-Mail information@sick.com

Ceská Republika

Phone +420 2 57 91 18 50

E-Mail sick@sick.cz

Phone +86 4000 121 000 E-Mail info.china@sick.net.cn Phone +852-2153 6300 E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00 E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301 E-Mail kundenservice@sick.de

Phone +34 93 480 31 00 E-Mail info@sick.es

Phone +33 1 64 62 35 00 E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121 E-Mail info@sick.co.uk

Phone +91-22-4033 8333 E-Mail info@sick-india.com

Israel

Phone +972-4-6801000 E-Mail info@sick-sensors.com

Phone +39 02 27 43 41 E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341 E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680 E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44

E-Mail info@sick.nl

Phone +47 67 81 50 00 E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0 E-Mail office@sick.at

Phone +48 22 837 40 50 E-Mail info@sick.pl

România

Phone +40 356 171 120 E-Mail office@sick.ro

Phone +7-495-775-05-30 E-Mail info@sick.ru

Phone +41 41 619 29 39 E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732 E-Mail admin@sicksgp.com.sg

Sloveniia

Phone +386 (0)1-47 69 990 E-Mail office@sick.si

South Africa

Phone +27 11 472 3733 E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4 E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800 F-Mail_sick@sick.fi

Phone +46 10 110 10 00 E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288 E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00 E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878 E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780 1 800-325-7425 - tollfree E-Mail info@sickusa.com

More representatives and agencies

at www.sick.com

