



Laser scanners LMC1xx / LMC13x / Security / Semi-Outdoor / Short Range

LMC132-11101 VdS



Model Name > [LMC132-11101 VdS](#)
Part No. > [1051488](#)



Illustration may differ

At a glance

- The only VdS-certified laser scanner on the market (German certificate standard)
- Highest class "C" with environmental class II or IVa
- Flexible connection to DC 9 V to 30 V
- Two isolated relays (alarms) and one obstruction output
- Long detection range of 20 m, horizontal and vertical
- Up to 10 freely definable monitoring fields with intelligent evaluation algorithms
- Certified QuickStart menu
- 200 RAL colors available

Your benefits

- VdS certification for proven and reliable system acceptance by insurance companies (German certificate standard)
- High angular resolution provides a secure solution that improves reliability
- Secure, reliable detection with few false alarms due to precise field configuration of the detection area
- Small size provides unobtrusive solution
- Intelligent evaluation provides maximum application flexibility
- Easy integration into existing alarm management systems
- Low maintenance due to high immunity against environmental influences
- Cost-effective retrofitting due to low installation and wiring costs



Features

Field of application:	Security, Semi-Outdoor
Version:	Short Range
Light source:	Infrared (905 nm)
Laser class:	1 (IEC 60825-1 (2007-3))
Field of view:	270 °
Scanning frequency:	50 Hz
Angular resolution:	0.25 ° 0.5 °
Heating:	Yes
Operating range:	0.5 m ... 20 m
Max. range with 10 % reflectivity:	18 m
Amount of evaluated echoes:	2

Performance

Response time:	≥ 20 ms
Detectable object shape:	Almost any
Systematic error ¹⁾ :	± 30 mm
Statistical error ²⁾ :	± 12 mm
Integrated application:	Field evaluation
Number of field sets:	10 fields
Simultaneous processing cases:	10

1) 2) Typical value; actual value depends on environmental conditions.

Interfaces

Serial (RS-232):	✓
Function (Serial (RS-232)):	Host, AUX
Data transmission rate (Serial (RS-232)):	9.6 kBaud ... 115.2 kBaud
Ethernet:	✓
Function (Ethernet):	Host
Data transmission rate (Ethernet):	10/100 Mbit
Protocol (Ethernet):	TCP/IP
CAN bus:	✓
Function (CAN bus):	Outputs extension
PROFIBUS DP:	-
PROFINET:	-
DeviceNet:	-
Switching inputs:	4 (2 x IN, 2 x increment (1-phase))
Switching outputs:	3 (2 relay, 1 digital)
Optical indicators:	1 7-segment display (plus 5 LEDs showing device status, contamination warning and initial condition, both can be activated)

Mechanics/electronics

Electrical connection:	1 system plug with screw terminal block
Operating voltage:	9 V DC ... 30 V DC
Power consumption:	20 W
Housing color:	Black (RAL 9005)
Enclosure rating:	IP 67 (EN 60529, Section 14.2.5)
Protection class:	III (EN 50178 (1997;10))
Weight:	1.1 kg, without connecting cables
Dimensions:	105 mm x 102 mm x 152 mm


Ambient data

Object remission:	2 % ... > 1,000 % (reflectors)
Electromagnetic compatibility (EMC):	(EN 61000-6-2:2005) (EN 61000-6-4 (2007-01))
Vibration resistance:	(EN 60068-2-6 (1995-04))
Shock resistance:	(EN 60068-2-27 (1993-03))
Ambient operating temperature:	-30 °C ... 50 °C
Storage temperature:	-30 °C ... 70 °C
Ambient light safety:	40,000 lx

General notes

Items supplied:	Mounting protection bracket VdS 2 (short), LMS13x VdS (Outdoor)
Note on use:	Not suitable for personnel protection

Operating range diagram

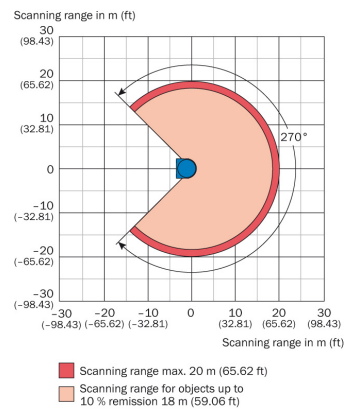

Australia

Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6801000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com