



Laser scanners  
LMS2xx / LMS221 / Outdoor / Mid Range

LMS221-S26



**Model Name** > [LMS221-S26](#)  
**Part No.** > [1044296](#)



#### At a glance

- The large variety of versions available offer tailor-made solutions for indoor and outdoor tasks
- Non-contact optical measurement even over long distances
- Background or substrate has no effect on measurement
- Integrated field monitoring
- Rugged housing
- Various applications, e.g. object measurement, position measurement, navigation and area monitoring

#### Your benefits

- High target object speed possible
- Measurement objects require no special reflectivity properties
- Objects require no reflectors or marking
- Target object in any position
- Measurement data are available in real time and can be used for further calculation or control tasks
- No illumination of target object necessary
- Simple installation and commissioning
- Any mounting position

**The product has been discontinued. Please follow the "replacement product" link for information about alternative products.**



#### Features

Field of application:	Outdoor
Version:	Mid Range
Light source:	Infrared (905 nm)
MTBF:	50,000 h
Laser class:	1 (EN/IEC 60825-1), eye-safe
Field of view:	180 °
Scanning frequency:	75 Hz
Angular resolution:	0.25 ° 0.5 ° 1 °

Heating:	Yes
Operating range:	0 m ... 80 m
Max. range with 10 % reflectivity:	30 m
Fog correction:	Yes

### Performance

---

Response time:	≥ 13 ms
Detectable object shape:	Almost any
Systematic error <sup>1)</sup> :	± 35 mm
Statistical error <sup>2)</sup> :	± 10 mm
Integrated application:	Field evaluation
Number of field sets:	2 field triples (6 fields)
Simultaneous processing cases:	1 (3 fields)

<sup>1) 2)</sup> Typical value; actual value depends on environmental conditions.

### Interfaces

---

Serial (RS-232, RS-422):	-
Ethernet:	✓
Function (Ethernet):	Host
Data transmission rate (Ethernet):	10/100 Mbit
Protocol (Ethernet):	TCP/IP, UDP
CAN bus:	-
PROFIBUS DP:	-
PROFINET:	-
DeviceNet:	-
Switching inputs:	1
Switching outputs:	3
Optical indicators:	0

### Mechanics/electronics

---

Electrical connection:	1 16-pin plug
Operating voltage:	≤ 24 V DC
Power consumption:	30 W, + 140 W heating
Housing:	Base plate aluminum diecast Covering PU
Housing color:	Gray (RAL 7032)
Enclosure rating:	IP 67
Protection class:	III (EN 50178:1997-10)
Weight:	9 kg
Dimensions:	241 mm x 351 mm x 265 mm

### Ambient data

---

Object remission:	1.8 % ... 10,000 %
Electromagnetic compatibility (EMC):	(EN 61000-6-2) (EN 61000-6-3/A11 (2004-07))
Vibration resistance:	(IEC 68)
Shock resistance:	(IEC 68)
Ambient operating temperature:	-30 °C ... 50 °C
Storage temperature:	-30 °C ... 70 °C


### General notes

---


Note on use:  
Life cycle phase:

Not suitable for personnel protection  
Phased out

### Operating range diagram

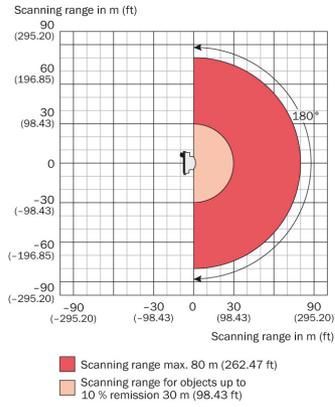

### Dimensional drawing

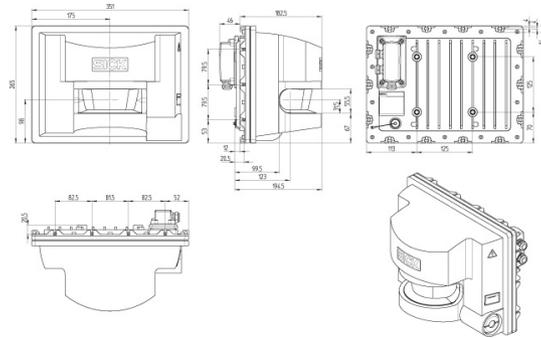

**Australia**

Phone +61 3 9457 0600  
1800 334 802 – tollfree  
E-Mail sales@sick.com.au

**Belgium/Luxembourg**

Phone +32 (0)2 466 55 66  
E-Mail info@sick.be

**Brasil**

Phone +55 11 3215-4900  
E-Mail sac@sick.com.br

**Canada**

Phone +1 905 771 14 44  
E-Mail information@sick.com

**Ceská Republika**

Phone +420 2 57 91 18 50  
E-Mail sick@sick.cz

**China**

Phone +86 4000 121 000  
E-Mail info.china@sick.net.cn  
Phone +852-2153 6300  
E-Mail ghk@sick.com.hk

**Danmark**

Phone +45 45 82 64 00  
E-Mail sick@sick.dk

**Deutschland**

Phone +49 211 5301-301  
E-Mail kundenservice@sick.de

**España**

Phone +34 93 480 31 00  
E-Mail info@sick.es

**France**

Phone +33 1 64 62 35 00  
E-Mail info@sick.fr

**Great Britain**

Phone +44 (0)1727 831121  
E-Mail info@sick.co.uk

**India**

Phone +91-22-4033 8333  
E-Mail info@sick-india.com

**Israel**

Phone +972-4-6801000  
E-Mail info@sick-sensors.com

**Italia**

Phone +39 02 27 43 41  
E-Mail info@sick.it

**Japan**

Phone +81 (0)3 3358 1341  
E-Mail support@sick.jp

**Magyarország**

Phone +36 1 371 2680  
E-Mail office@sick.hu

**Nederlands**

Phone +31 (0)30 229 25 44  
E-Mail info@sick.nl

**Norge**

Phone +47 67 81 50 00  
E-Mail austefjord@sick.no

**Österreich**

Phone +43 (0)22 36 62 28 8-0  
E-Mail office@sick.at

**Polska**

Phone +48 22 837 40 50  
E-Mail info@sick.pl

**România**

Phone +40 356 171 120  
E-Mail office@sick.ro

**Russia**

Phone +7-495-775-05-30  
E-Mail info@sick.ru

**Schweiz**

Phone +41 41 619 29 39  
E-Mail contact@sick.ch

**Singapore**

Phone +65 6744 3732  
E-Mail admin@sicksgp.com.sg

**Slovenija**

Phone +386 (0)1-47 69 990  
E-Mail office@sick.si

**South Africa**

Phone +27 11 472 3733  
E-Mail info@sickautomation.co.za

**South Korea**

Phone +82 2 786 6321/4  
E-Mail info@sickkorea.net

**Suomi**

Phone +358-9-25 15 800  
E-Mail sick@sick.fi

**Sverige**

Phone +46 10 110 10 00  
E-Mail info@sick.se

**Taiwan**

Phone +886-2-2375-6288  
E-Mail sales@sick.com.tw

**Türkiye**

Phone +90 (216) 528 50 00  
E-Mail info@sick.com.tr

**United Arab Emirates**

Phone +971 (0) 4 8865 878  
E-Mail info@sick.ae

**USA/México**

Phone +1(952) 941-6780  
1 800-325-7425 – tollfree  
E-Mail info@sickusa.com

More representatives and agencies  
at [www.sick.com](http://www.sick.com)