



Vision sensors
Inspector, Inspector PI-series, Inspector PI50
EtherCAT

VSPP-5F2134



Model Name > [VSPP-5F2134](#)
Part No. > [1056394](#)

At a glance

- High-speed positioning and inspection
- Expanded toolbox for locating taught-in and free-form objects
- Multiple, simultaneous inspection of blobs, patterns, edges and pixel counting
- Easy device cloning via the web interface
- Image calibration, including mm output
- Configurable communication through real-time EtherCAT
- HMI integration via web API
- Simple, out-of-the-box web server

Your benefits

- Powerful yet simple tools enable flexibility in various positioning and inspection applications
- EtherNet communication and web API gives excellent control and freedom to customize user's HMI in integrated machine environments
- EtherCAT connectivity provides microsecond level real time control, allowing ultra-precise timing control of in-motion inspection and positioning solutions
- Web interface enables import/export of unlimited number of reference objects, increasing production flexibility
- The built-in web server is an easy and cost-efficient way to monitor the production process
- The image calibration ensures reliable inspection results on moving and rotated objects in tilted setups, or when using wide angle lenses
- Result calibration gives easy-to-use mm data, simplifying alignment and gripping



Features

Task:	Inspection Positioning
Technology:	2D Image analysis Snapshot
Toolset:	Pattern Blob locator Object locator Polygon Pixel count, Edge pixel count
Sensor:	CMOS matrix sensor, gray scale values
Focus:	Manually adjustable focus
Working distance:	≥ 50 mm
Working distance internal illumination:	50 mm ... 200 mm

Field of view internal illumination:	22 mm x 15 mm ... 79 mm x 58 mm
Light source:	White
Spectral range:	Ca. 400 nm ... 750 nm
LED class:	Risk group 1 (low risk, IEC62471 : 2006)
Offline support:	Emulator
Calibration:	Perspective and lens distortion correction, mm results

Performance

Resolution:	640 px x 480 px
Maximum performance:	200 fps
Typical performance:	40 fps
Number of inspections:	32
Reference images:	32 objects

Interfaces

Operator interfaces:	Inspector Viewer, Web server
Configuration software:	SOPAS
Data store and retrieve:	Record images on PC Store images to FTP 30 images device log
Communication interfaces:	100 MBit/s Ethernet
Ethernet communication:	CoE, DC, Dual port, EoE, EtherCAT, FoE, Web API
Digital inputs:	4 inputs (24 V)
Configurable inputs:	Reference object selection Encoder input External trigger External teach
Digital outputs:	3 outputs, 24 V (B-type)
Configurable outputs:	Output by logical expressions, Store images to FTP overflow
Output current:	100 mA
Default outputs:	All pass Any fail No object detected
Maximum encoder frequency:	40 kHz
Control of external illumination:	5 V TTL

Mechanics/electronics


Connectors:	M12, 12-pin male connector M12, 4-pin female connector
Supply voltage:	24 V DC± 20 %
Power consumption:	< 450 mA Without output load
Ripple:	< 5 Vpp
Enclosure rating:	IP 67 (with front window mounted)
Housing material:	Aluminum
Window material:	PMMA
Weight:	445 g
Dimensions (L x W x H):	100 mm x 53 mm x 38 mm
Optics:	Exchangeable (M12-mount)

Ambient data


Shock load:	EN 60068-2-27
Vibration load:	IEC 60068-2-6
Ambient operating temperature ¹⁾ :	0 °C ... 45 °C
Ambient storage temperature ²⁾ :	-20 °C ... 70 °C

1) 2) Relative humidity: 35 % ... 85 %, 95 % at operation


Dimensional drawing

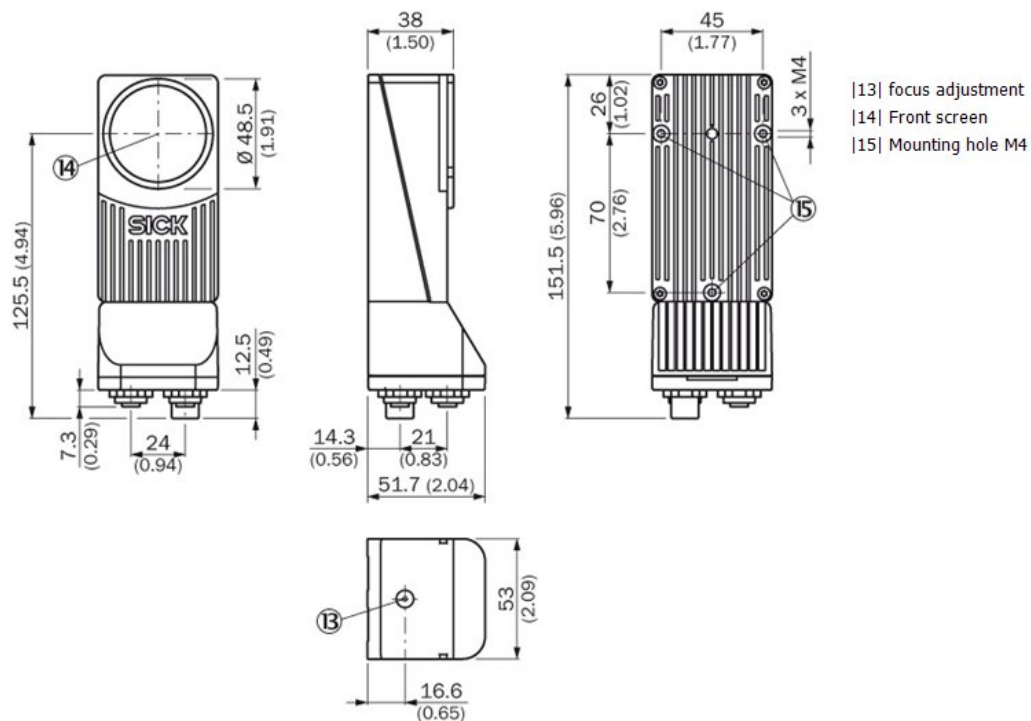


Connection type

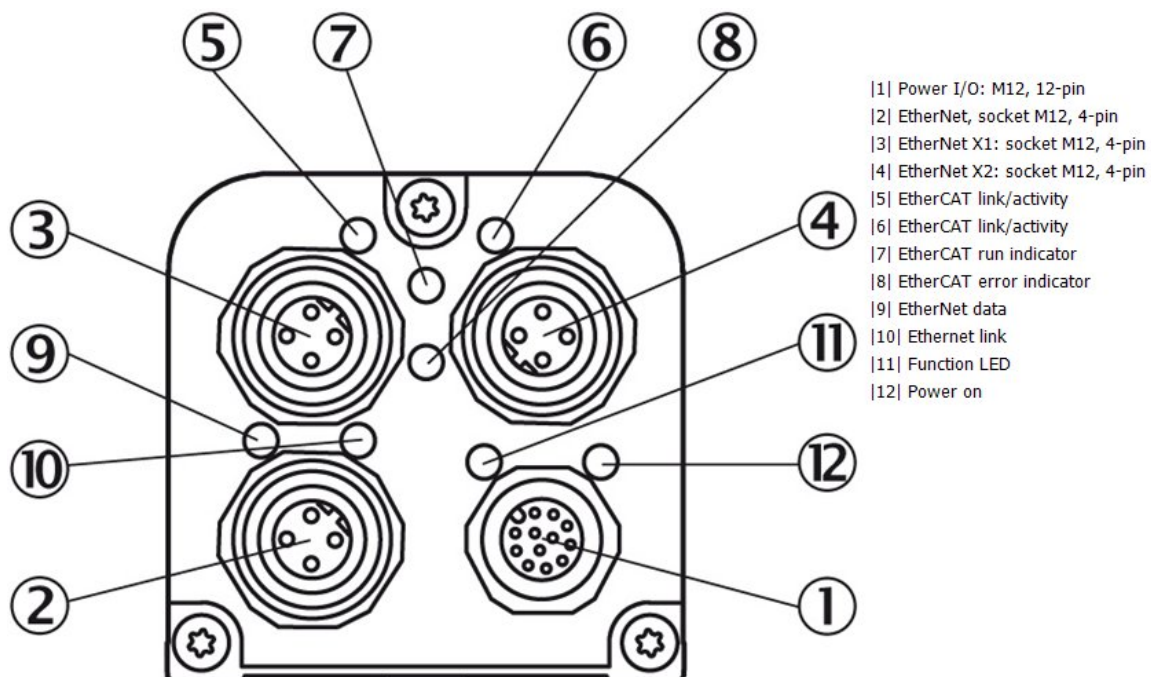

Connection diagram Ethernet

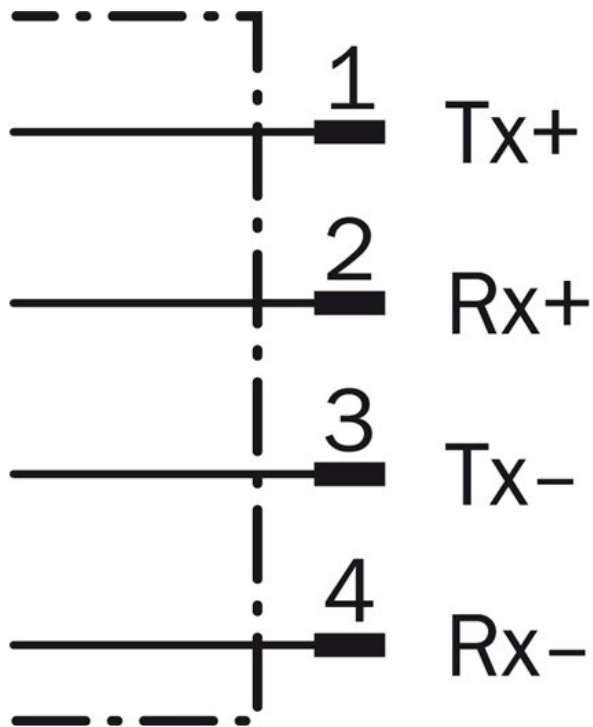

Connection diagram M12, 12-pin

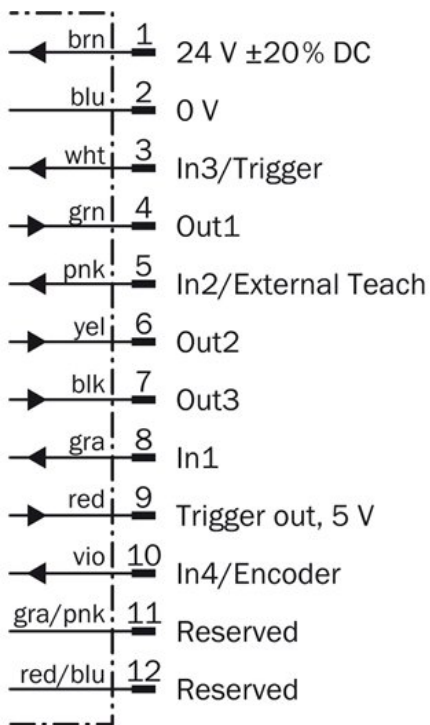

Australia

Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6801000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com