



Photoelectric sensors W12G, Photoelectric retro-reflective sensor, autocollimation

WL12G-302431S47



Model Name > [WL12G-3O2431S47](#)
Part No. > [1044114](#)



Illustration may differ

At a glance

- Reliable detection of transparent objects
- Optional Continuous Threshold Adaption (CTA)
- Sensing range is adjustable via potentiometer or teach-in pushbutton
- Rugged housing for industrial use
- Highly visible red light spot for versatile detection of objects
- Quality monitoring thanks to IO-Link
- Key lock function, remote teach
- Diagnostics messages (contamination and short-circuit)

Your benefits

Reliable detection of transparent objects, including PET bottles and transparent film
PinPoint LED technology provides a bright, small and precise light spot that enables quick and easy sensor alignment

Precise switching characteristics and high-performance object detection provides increased productivity

High immunity to optical interference reduces false readings

Rugged metal housing (optional Teflon® coating available) requires less maintenance due to its resistance to high-pressure cleaning environments

Quick and easy threshold adjustment (depending on type)

Simple monitoring of detection quality

Key lock function and parameter download prevent incorrect setting



Features

Sensor/detection principle:	Photoelectric retro-reflective sensor, autocollimation
Dimensions (W x H x D):	15.6 mm x 48.5 mm x 42 mm
Housing design (light emission):	Rectangular
Sensing range max.:	0 m ... 7 m ¹⁾
Sensing range:	0 m ... 5 m ²⁾
Type of light:	Visible red light
Light source:	LED ³⁾
Wave length:	640 nm
Angle of dispersion:	Ca. 1.5 °
Adjustment:	Potentiometer, 5-turn

Light spot size (distance): Ø 100 mm (3 m)

Continuous threshold adaption: -

1) 2) PL80A 3) Average service life of 100,000 h at $T_A = +25\text{ °C}$


Mechanics/electronics

Output type:	PNP
Switching mode:	Light/dark-switching
Output current I _{max} :	100 mA
Response time:	≤ 330 µs ¹⁾
Switching frequency:	1,500 Hz ²⁾
Connection type:	Connector M12, 4-pin
Circuit protection:::	A, C, D ³⁾ ⁴⁾ ⁵⁾
Protection class:	II
Weight:	120 g
Polarisation filter:	✓
Special device:	✓
Housing material:	Metal
Enclosure rating:	IP 66 IP 67 IP 69K
Special feature:	For transparent objects
Special features:	Pin assignment: 1 = L+ / 3 = 0 V / 4 = Q / 2 = NC
Ambient operating temperature:	-40 °C ... 60 °C
Ambient storage temperature:	-40 °C ... 75 °C
UL File No.:	NRKH.E181493 & NRKH7.E181493


¹⁾ Signal transit time with resistive load ²⁾ With light/dark ratio 1:1 ³⁾ A = V_S connections reverse-polarity protected ⁴⁾ C = interference suppression ⁵⁾ D = outputs

overcurrent and short-circuit protected


Adjustments possible

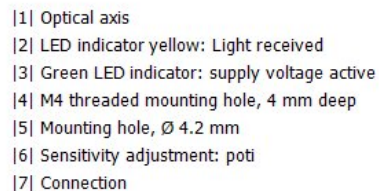


Adjustments possible

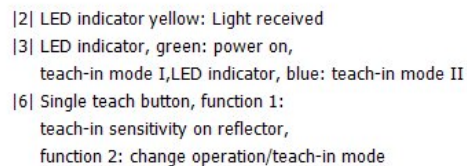

Connection diagram

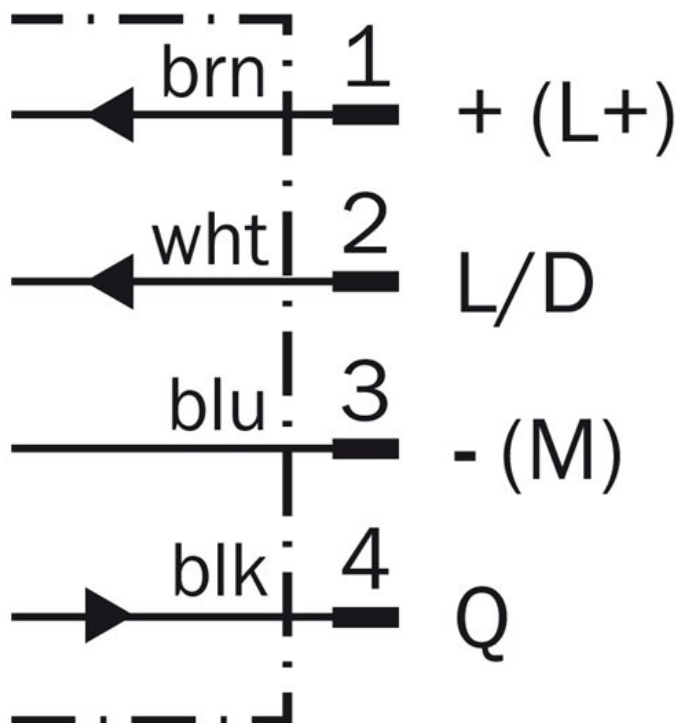


Sensing range diagram

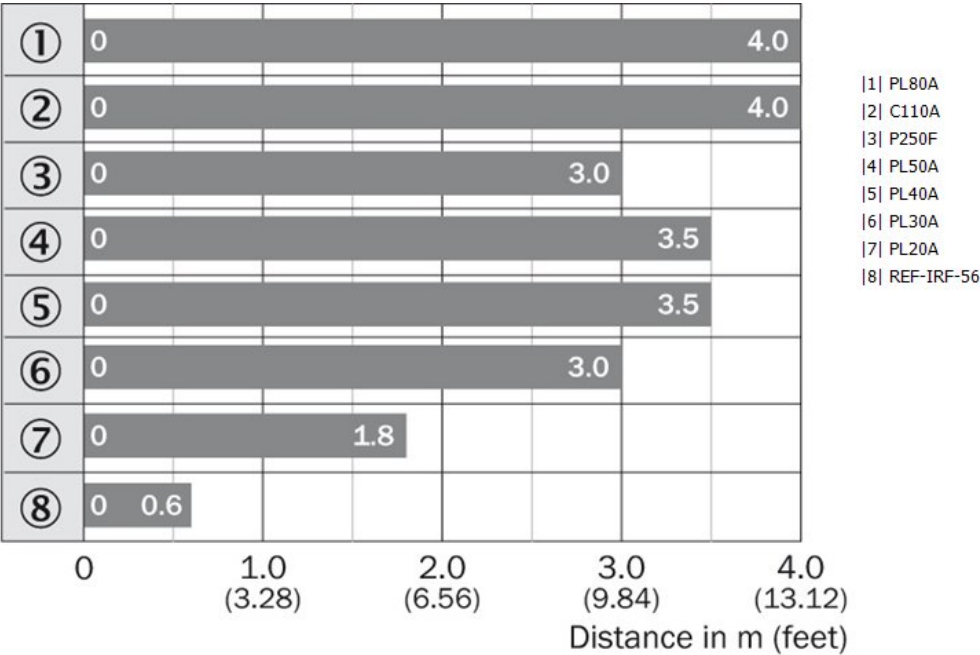


■ Sensing range max.

Connection type

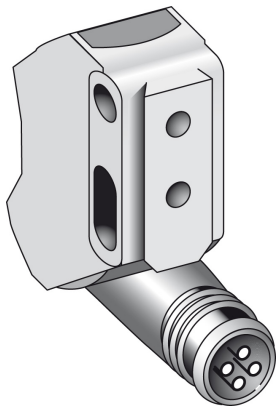

Light spot size

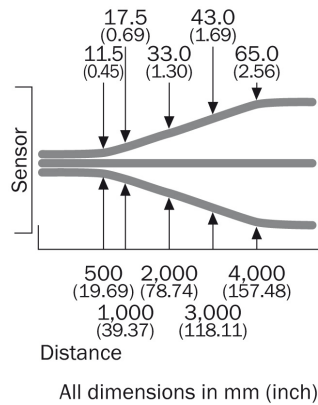

Australia

Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6801000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com