


SM6404



Magnetic-inductive flow meter

SMK12GGX50KG/US-100

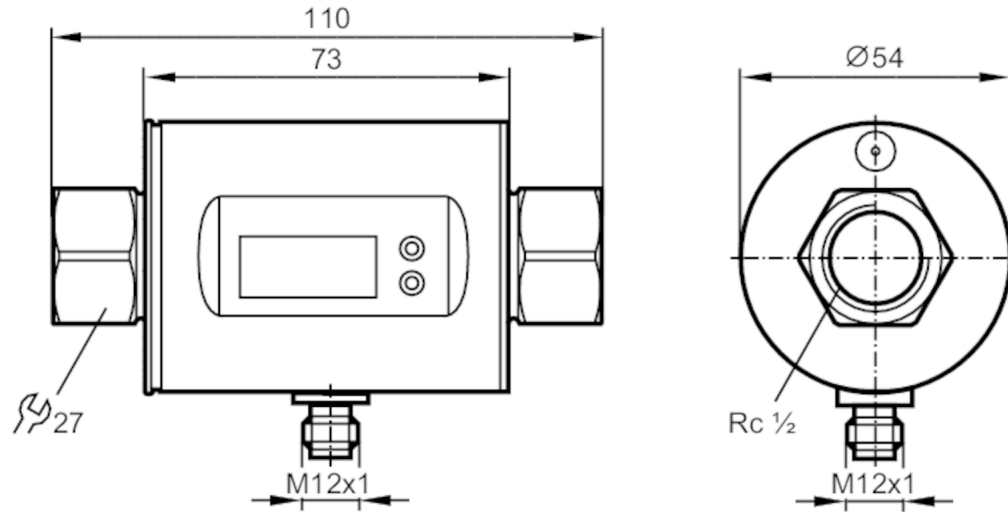

Application		
Application	for industrial applications	
Media	conductive liquids; water; hydrous media	
Medien	conductivity: $\geq 20 \mu\text{S/cm}$ viscosity: $< 70 \text{ mm}^2/\text{s}$ (40 °C)	
Medium temperature	[°C]	-10...70
Pressure rating	[bar]	16
Electrical data		
Operating voltage	[V]	20...30 DC; (according to EN 50178 SELV/PELV)
Current consumption	[mA]	120; (24 V)
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	5
Outputs		
Total number of outputs		2
Output signal		analogue signal
Number of analogue outputs		2
Analogue current output	[mA]	4...20; (scalable)
Max. load	[Ω]	500
Overload protection		yes
Measuring/setting range		
Measuring range	0.03...6.6 gpm	0.1...25 l/min
Display range	-7.92...7.92 gpm	-30...30 l/min
Resolution	0.01 gpm	0.05 l/min
Analogue start point ASP	0...5.28 gpm	0...20 l/min
Analogue end point AEP	1.32...6.6 gpm	5...25 l/min
In steps of	0.01 gpm	0.05 l/min

SM6404



Magnetic-inductive flow meter

SMK12GGX50KG/US-100

Temperature monitoring		
Measuring range	[°C]	-20...80
Resolution	[°C]	0.2
Analogue start point	[°C]	-20...60
Analogue end point	[°C]	0...80
In steps of	[°C]	0.2
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)		± (0,8 % MW + 0,5 % MEW)
Repeatability		± 0,2% MEW
Temperature monitoring		
Accuracy	[K]	± 2,5 (Q > 1 l/min)
Response times		
Flow monitoring		
Response time	[s]	0.15; (dAP = 0)
Damping for the switching output dAP	[s]	0...3
Temperature monitoring		
Dynamic response T05 / T09	[s]	T09 = 20 (Q > 1 l/min)
Operating conditions		
Ambient temperature	[°C]	-10...60
Storage temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	DIN EN 60947-5-9	500 V withstand voltage (V DC)
Shock resistance	DIN IEC 68-2-27	20 g (11 ms)
Vibration resistance	DIN IEC 68-2-6	5 g (10...2000 Hz)
MTTF	[years]	175
UL approval	UL Approval no.	I011
Pressure Equipment Directive	Sound Engineering Practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight	[g]	550
Materials	stainless steel (1.4404 / 316L); PBT-GF20; PC; FKM; TPE	
Materials (wetted parts)	stainless steel (1.4404 / 316L); PEEK; FKM	
Process connection	threaded connection Rc 1/2 internal thread	
Displays / operating elements		
Display	Display unit	6 x LED, green (l/min, m³/h, gpm, gph, °C, °F)
	measured values	alphanumeric display, 4-digit
	programming	alphanumeric display, 4-digit
Remarks		
Remarks	MW = measured value	
	MEW = Final value of the measuring range	
Pack quantity	1 pcs.	

SM6404



Magnetic-inductive flow meter


SMK12GGX50KG/US-100

Electrical connection

Connector: 1 x M12; Contacts: gold-plated



Connection

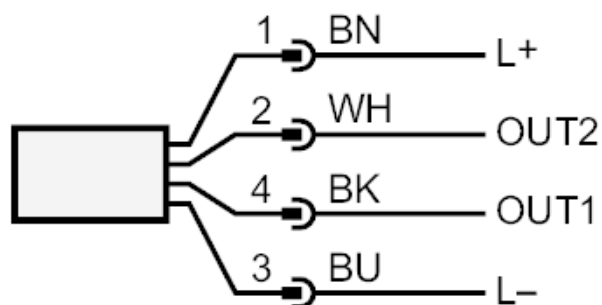

colours to DIN EN 60947-5-2

OUT1: analogue output Temperature monitoring

OUT2: analogue output volumetric flow quantity monitoring

Core colours :

BK = black

BN = brown

BU = blue

WH = white

SM6404


Magnetic-inductive flow meter

SMK12GGX50KG/US-100



Diagrams and graphs

Pressure loss

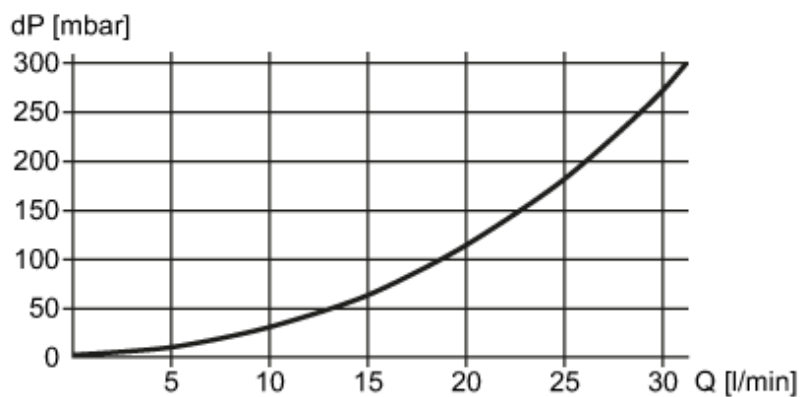

dP Pressure loss

Q volumetric flow quantity