

STBACO0120K

standard analog output kit STB - 4..20 mA - 1
O - 15 bits + sign



Main

Range of product	Modicon STB distributed I/O solution
Product or component type	Standard analog output kit
Kit composition	STBAV11270 module STBXBA1000 base STBXTS1100, 6-terminal screw type connector STBXTS2100, 6-terminal spring clamp connector
Analogue output type	Current 4...20 mA
Analogue output number	1
Analogue output resolution	15 bits + sign

Complementary

Analogue output current	3.5 mA...20 A
Response time	4 ms plus update time
Cold swapping	Yes
Hot swapping	Yes for standard NIMs
Fallback	User configurable standard NIMs State 0 basic NIMs
Data format	EN 61131-2 IEC 61131-2
Update time	8 ms
Protection type	Short-circuit protection
Integral linearity	+/- 0.5 %FS
Differential linearity	Monotonic
Absolute accuracy error	+/- 0.3 % of full scale 25 °C
Temperature drift	+/-0.005 %/°C
Insulation between channels and logic bus	1500 V for 1 minute
Insulation between channels and actuator bus	500 V
Addressing requirement	2 output words
Product compatibility	Mounting base STBXBA1000 Power distribution module STBPDT3100/3105
[Us] rated supply voltage	24 V DC
Supply	Power distribution module
Current consumption	155 mA 5 V DC logic bus
Marking	CE
Overvoltage category	II
Status LED	1 LED red module error (ERR) 1 LED green module status (RDY)
Depth	70 mm
Height	18.4 mm
Width	128.3 mm

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Environment

Product certifications	CSA FM Class 1 Division 2 UL
Pollution degree	2 IEC 60664-1
Operating altitude	<= 2000 m
IP degree of protection	IP20 EN 61131-2 class 1
Ambient air temperature for operation	-25...75 °C without
Ambient air temperature for operation	- 13...158 °F without
Ambient air temperature for storage	-40...85 °C without
Ambient air temperature for storage	-40...185 °F without
Relative humidity	95 % 60 °C without condensation
Vibration resistance	5 gn 58...150 Hz 35 x 15 mm symmetrical DIN rail 3 gn 58...150 Hz 35 x 7.5 mm symmetrical DIN rail +/-0.35 mm 10...58 Hz
Shock resistance	30 gn 11 ms IEC 88 reference 2-27

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0936 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available


Dimensions

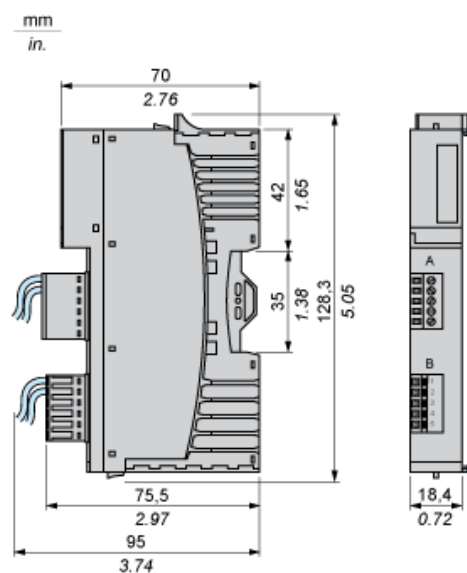


Wiring Diagrams

Examples


1 sink actuator

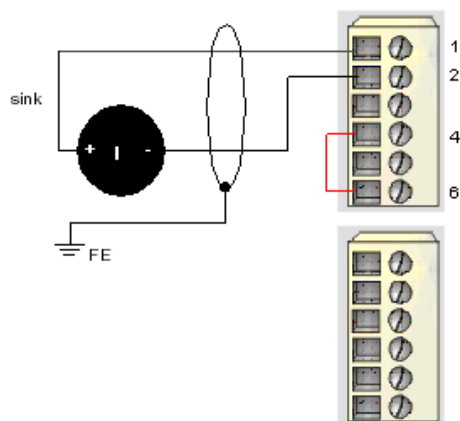


1 source actuator

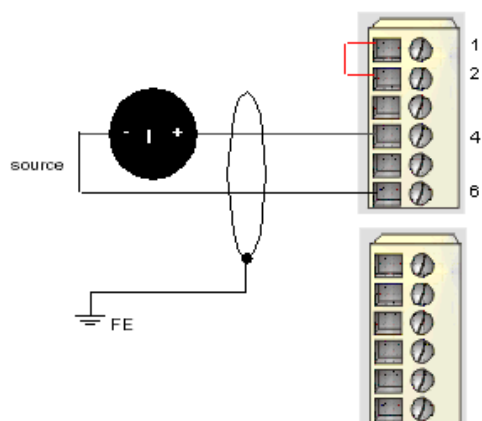

1 source actuator, external 24 VDC power supply

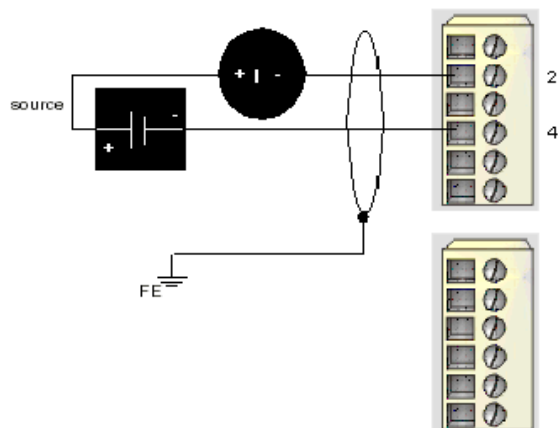

1 sink actuator, external 24 VDC power supply

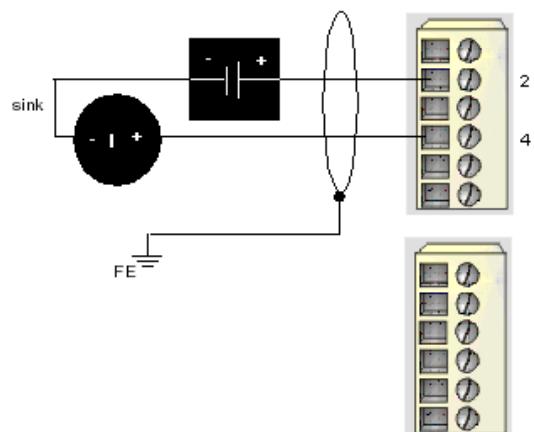

Pin	Top Connections	Bottom Connections
1	+24 VDC loop supply	no connection
2	output to actuator	no connection
3	no connection	no connection
4	output channel return	no connection
5	no connection	no connection
6	loop power return (to the module)	no connection