

TA3333


Temperature transmitter

TA-060FLDN14-A-ZVG/US/



Status Archive

TA3313

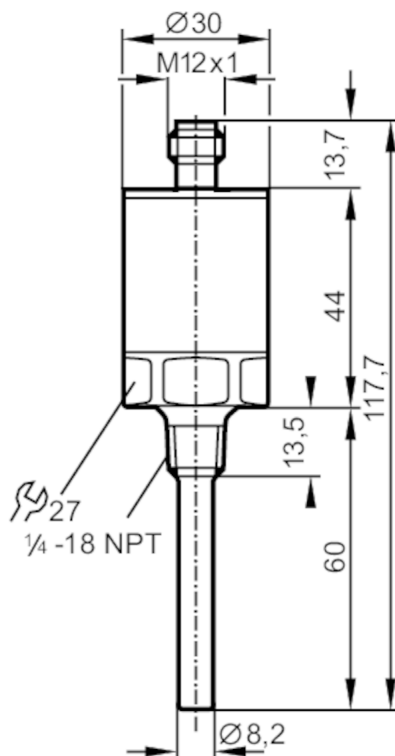

Application

Measuring element	1 x Pt 1000; (to DIN EN 60751, class A)	
Media	liquids and gases	
Medium temperature	< 150; (< 40 min) °C	< 302; (< 40 min) °F
Pressure rating [bar]	300	
Minimum installation depth [mm]	15	

Electrical data

Operating voltage [V]	10...30 DC
Protection class	III
Reverse polarity protection	yes

Outputs

Total number of outputs	1
Output signal	analogue signal
Number of analogue outputs	1
Analogue current output [mA]	4...20
Max. load [Ω]	500
Overload protection	yes

TA3333



Temperature transmitter

TA-060FLDN14-A-ZVG/US/

Measuring/setting range		
Probe length L	[mm]	46.5
Measuring range		-17.8...148.9 °C 0...300 °F
Resolution		
Resolution of analogue output	[K]	0.02
Accuracy / deviations		
Precision analogue output	[K]	± 0,4
Temperature coefficient [% of the span / 10 K]		< ± 0,1; (in case of deviation from the reference condition 25 ± 5 °C)
Response times		
Dynamic response T05 / T09	[s]	1 / 3; (to DIN EN 60751)
Operating conditions		
Ambient temperature	[°C]	-25...70
Storage temperature	[°C]	-40...100
Protection		IP 68; IP 69K
Tests / approvals		
EMC	DIN EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	DIN EN 61000-4-4 Burst	2 kV
	DIN EN 61000-4-5 Surge	1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF	[years]	1119
Mechanical data		
Weight	[g]	124.4
Dimensions	[mm]	Ø 30 / L = 117.7
Materials		stainless steel (1.4404 / 316L); stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); PA
Materials (wetted parts)		stainless steel (1.4404 / 316L)
Process connection		threaded connection 1/4" NPT
Installation length EL	[mm]	60
Remarks		
Remarks		operating voltage "supply class 2" according to cULus The values for accuracy apply to flowing water.
Notes		discontinued article
Pack quantity		1 pcs.
Electrical connection		
Connector: 1 x M12; Contacts: gold-plated		


TA3333

Temperature transmitter

TA-060FLDN14-A-ZVG/US/



Connection

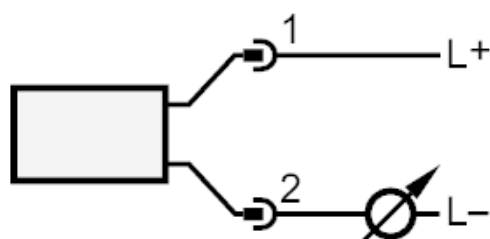

Status Archive

TA3313