


TAA431



Temperature transmitter

TAA123CCDR12-ASIVG/US

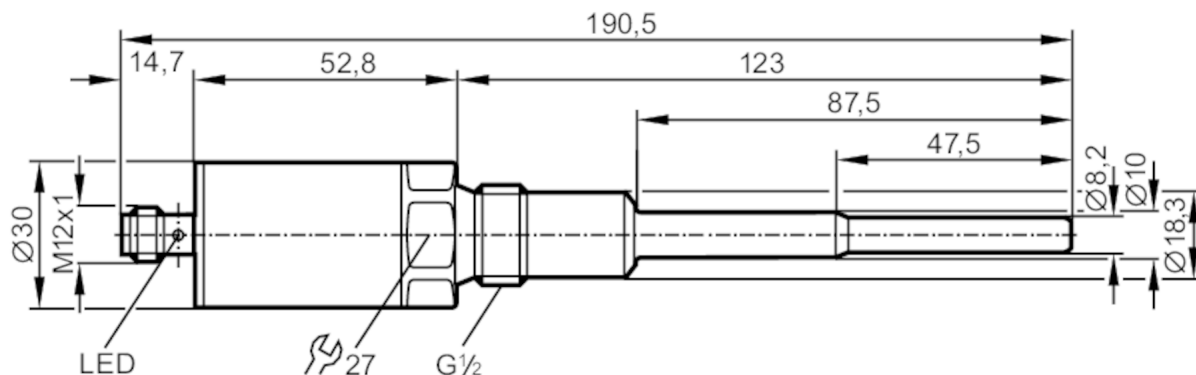

Application

Measuring element	1 x Pt 1000; (to DIN EN 60751, class A)	
Media	liquids and gases	
Medium temperature	< 150; (< 40 min) °C	< 302; (< 40 min) °F
Pressure rating [bar]	300	
Note on pressure rating	sensor	
Minimum installation depth [mm]	When mounted in adapters the specifications of the adapter data sheet apply.	
	15	

Electrical data

Operating voltage [V]	18...31.6 DC
Current consumption [mA]	< 25
Protection class	III
Reverse polarity protection	yes

Outputs

Total number of outputs	1
Output signal	analogue signal
Electrical design	AS-i
Number of analogue outputs	1
Overload protection	yes

Measuring/setting range

Probe length L [mm]	87.5
Measuring range	-10...150 °C
	14...302 °F

Resolution

Resolution of analogue output [K]	0.05
-----------------------------------	------

Accuracy / deviations

Precision analogue output [K]	± 0,1 (60°C / 140°F) / ± 0,3 (0...140°C / 32...284°F)
Temperature coefficient [% of the span / 10 K]	< ± 0,1; (in case of deviation from the reference condition 25 ± 5 °C)

TAA431



Temperature transmitter

TAA123CCDR12-ASIVG/US

Response times		
Dynamic response T05 / T09	[s]	1 / 3; (to DIN EN 60751)
Operating conditions		
Ambient temperature	[°C]	-25...70
Storage temperature	[°C]	-40...100
Protection		IP 68; IP 69K
Tests / approvals		
EMC	DIN EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	DIN EN 61000-4-4 Burst	2 kV
	DIN EN 61000-4-5 Surge	0,5/1 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	348
AS-i classification		
AS-i version		2.11
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	3.C
Mechanical data		
Weight	[g]	262.2
Dimensions	[mm]	Ø 30 / L = 190.5
Materials		stainless steel (1.4404 / 316L); stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); PA
Materials (wetted parts)		stainless steel (1.4404 / 316L)
Tightening torque	[Nm]	30...50
Process connection		threaded connection G 1/2 external thread
Installation length EL	[mm]	87.5
Displays / operating elements		
Display	operation	1 x LED, green
	failure	1 x LED, red
Remarks		
Remarks	The values for accuracy apply to flowing water. referring to UL: for use on a low voltage circuit with overcurrent protection in accordance with UL873 tab. 28.1 or I _{max} = 100/U _b (U _b = voltage of the circuit)	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; Contacts: gold-plated		
		

TAA431



Temperature transmitter

TAA123CCDR12-ASIVG/US

Connection

