

Price\* : 161.00 GBP



### Main

|                           |                                                       |
|---------------------------|-------------------------------------------------------|
| Range of product          | Modicon TM3                                           |
| Product or component type | Discrete I/O module                                   |
| Range compatibility       | Modicon M251<br>Modicon M241<br>Modicon M221          |
| Discrete input number     | 16 for input conforming to IEC 61131-2 Type 1         |
| Discrete input logic      | Sink or source (positive/negative)                    |
| Discrete input voltage    | 24 V                                                  |
| Discrete input current    | 7 mA for input                                        |
| Discrete output type      | Relay normally open                                   |
| Discrete output number    | 8                                                     |
| Discrete output logic     | Positive or negative                                  |
| Discrete output voltage   | 24 V DC for relay output<br>240 V AC for relay output |
| Discrete output current   | 2000 mA for relay output                              |

### Complementary

|                             |                                                                                                                                                                                                           |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Discrete I/O number         | 24                                                                                                                                                                                                        |
| Current consumption         | 5 mA at 5 V DC via bus connector (at state off)<br>0 mA at 24 V DC via bus connector (at state on)<br>0 mA at 24 V DC via bus connector (at state off)<br>65 mA at 5 V DC via bus connector (at state on) |
| Discrete input voltage type | DC                                                                                                                                                                                                        |
| Voltage state 1 guaranteed  | 15...28.8 V for input                                                                                                                                                                                     |
| Current state 1 guaranteed  | $\geq 2.5$ mA (input)                                                                                                                                                                                     |
| Voltage state 0 guaranteed  | 0...5 V for input                                                                                                                                                                                         |
| Current state 0 guaranteed  | $\leq 1$ mA (input)                                                                                                                                                                                       |
| Input impedance             | 3.4 kOhm                                                                                                                                                                                                  |
| Response time               | 4 ms (turn-on)<br>4 ms (turn-off)                                                                                                                                                                         |

|                                        |                                                                                                                                                                                                                                                           |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum current per output common      | 7 A                                                                                                                                                                                                                                                       |
| Mechanical durability                  | 20000000 cycles                                                                                                                                                                                                                                           |
| Minimum load                           | 10 mA at 5 V DC for relay output                                                                                                                                                                                                                          |
| Local signalling                       | 1 LED per channel (green)/I/O state:                                                                                                                                                                                                                      |
| Electrical connection                  | 17 x 1.5 mm <sup>2</sup> removable screw terminal block with pitch 3.81 mm adjustment for inputs<br>11 x 1.5 mm <sup>2</sup> removable screw terminal block with pitch 3.81 mm adjustment for outputs                                                     |
| Maximum cable distance between devices | Unshielded cable: <30 m for regular input                                                                                                                                                                                                                 |
| Insulation                             | Between input and internal logic at 500 V AC<br>Non-insulated between inputs<br>Between input groups and output groups at 1500 V AC<br>Between open contact at 750 V AC<br>Between output and internal logic at 500 V AC<br>Non-insulated between outputs |
| Marking                                | CE                                                                                                                                                                                                                                                        |
| Mounting support                       | Top hat type TH35-15 rail conforming to IEC 60715<br>Top hat type TH35-7.5 rail conforming to IEC 60715<br>plate or panel with fixing kit                                                                                                                 |
| Height                                 | 90 mm                                                                                                                                                                                                                                                     |
| Depth                                  | 84.6 mm                                                                                                                                                                                                                                                   |
| Width                                  | 42.9 mm                                                                                                                                                                                                                                                   |

## Environment

|                                       |                                                                                                                                                                                                                        |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards                             | EN/IEC 61131-2<br>EN/IEC 61010-2-201                                                                                                                                                                                   |
| Product certifications                | CULus<br>C-Tick                                                                                                                                                                                                        |
| Resistance to electrostatic discharge | 8 kV in air conforming to EN/IEC 61000-4-2<br>4 kV on contact conforming to EN/IEC 61000-4-2                                                                                                                           |
| Resistance to electromagnetic fields  | 10 V/m 80 MHz...1 GHz conforming to EN/IEC 61000-4-3<br>3 V/m 1.4 GHz...2 GHz conforming to EN/IEC 61000-4-3<br>1 V/m 2 GHz...3 GHz conforming to EN/IEC 61000-4-3                                                     |
| Resistance to magnetic fields         | 30 A/m 50/60 Hz conforming to EN/IEC 61000-4-8                                                                                                                                                                         |
| Resistance to fast transients         | 1 kV for I/O conforming to EN/IEC 61000-4-4<br>2 kV for relay output conforming to EN/IEC 61000-4-4                                                                                                                    |
| Surge withstand                       | 2 kV output common mode conforming to EN/IEC 61000-4-5<br>1 kV input common mode conforming to EN/IEC 61000-4-5                                                                                                        |
| Resistance to conducted disturbances  | 10 V 0.15...80 MHz conforming to EN/IEC 61000-4-6<br>3 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) conforming to Marine specification (LR, ABS, DNV, GL)                                        |
| Electromagnetic emission              | Radiated emissions - test level: 40 dBµV/m QP class A ( 10 m) at 30...230 MHz conforming to EN/IEC 55011<br>Radiated emissions - test level: 47 dBµV/m QP class A ( 10 m) at 230...1000 MHz conforming to EN/IEC 55011 |
| Ambient air temperature for operation | -10...35 °C vertical installation<br>-10...55 °C horizontal installation                                                                                                                                               |
| Ambient air temperature for storage   | -25...70 °C                                                                                                                                                                                                            |
| Relative humidity                     | 10...95 %, without condensation (in operation)<br>10...95 %, without condensation (in storage)                                                                                                                         |
| IP degree of protection               | IP20 with protective cover in place                                                                                                                                                                                    |
| Pollution degree                      | 2                                                                                                                                                                                                                      |
| Operating altitude                    | 0...2000 m                                                                                                                                                                                                             |
| Storage altitude                      | 0...3000 m                                                                                                                                                                                                             |
| Vibration resistance                  | 3.5 mm at 5...8.4 Hz on DIN rail<br>3 gn at 8.4...150 Hz on DIN rail<br>3.5 mm at 5...8.4 Hz on panel<br>3 gn at 8.4...150 Hz on panel                                                                                 |
| Shock resistance                      | 15 gn for 11 ms                                                                                                                                                                                                        |


### Offer Sustainability

|                            |                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                       |
| REACH free of SVHC         | Yes                                                                                                                         |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                           |
| Toxic heavy metal free     | Yes                                                                                                                         |
| Mercury free               | Yes                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>                                                                                      |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                               |
| Circularity Profile        | <a href="#">End of Life Information</a>                                                                                     |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

### Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Dimensions

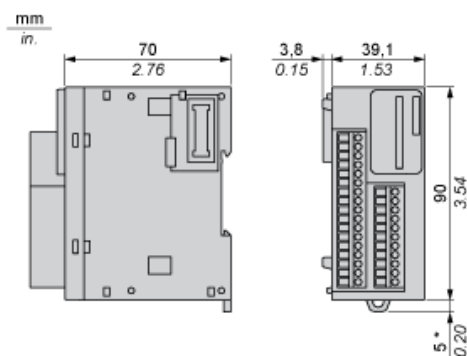

(\*) 8.5 mm/0.33 in. when the clamp is pulled out.


## Spacing Requirements

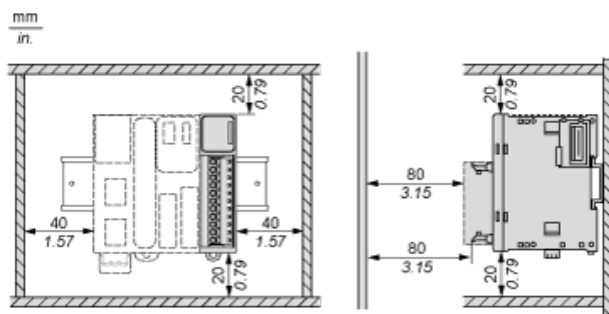


---

Mounting on a Rail


---

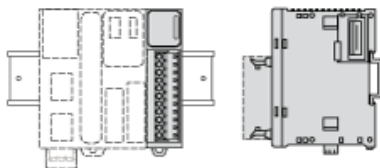

Incorrect Mounting

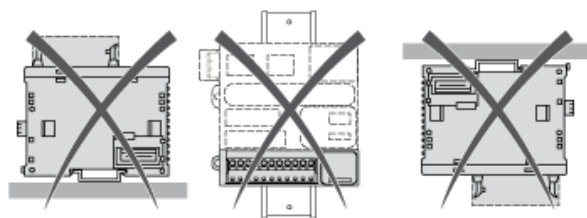


## Mounting on a Panel Surface




- (1) Install a mounting strip

## Mounting Hole Layout

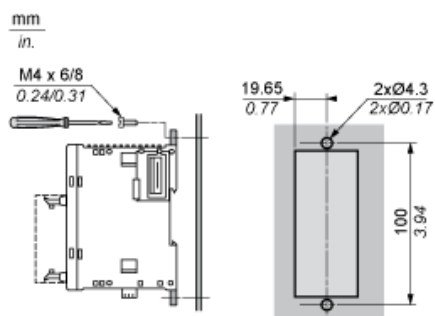

## Digital Mixed I/O Module (24-channel)

### Wiring Diagram (Source)

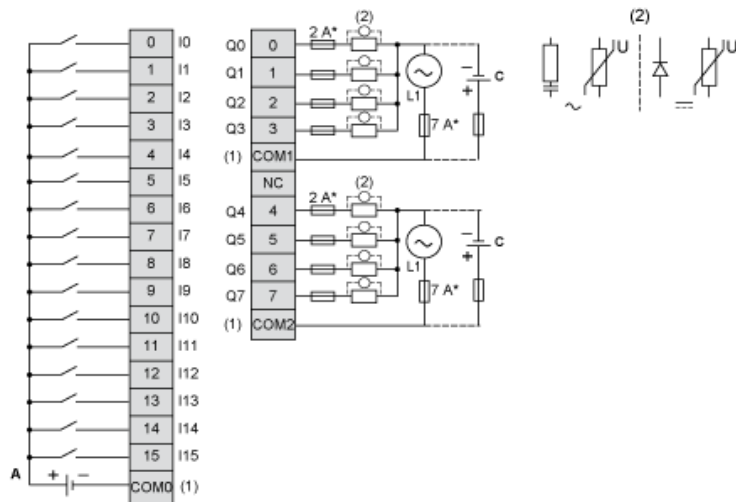

(\*) Type T fuse


(1) The COM0, COM1 and COM2 terminals are not connected internally.

(2) To improve the life time of the contacts, and to protect from potential inductive load damage, it is recommended to connect a free wheeling diode in parallel with the load.

(A) Sink wiring (positive logic)

(C) Source wiring (positive logic)

### Wiring Diagram (Sink)

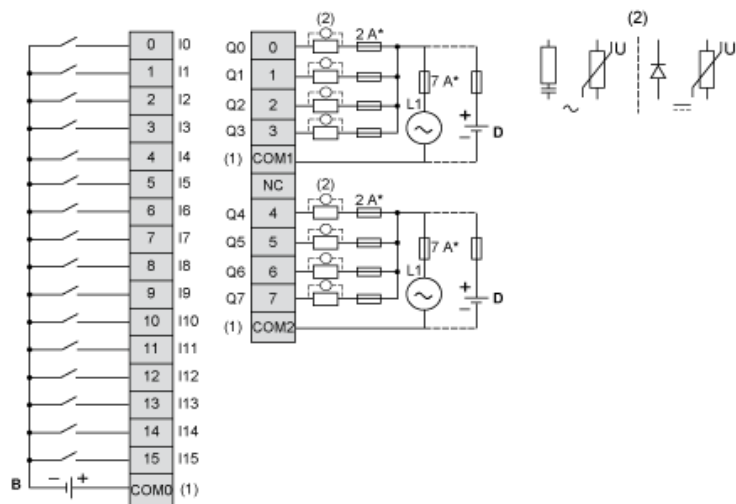

(\*) Type T fuse

(1) The COM0, COM1 and COM2 terminals are not connected internally.

(2) To improve the life time of the contacts, and to protect from potential inductive load damage, it is recommended to connect a free wheeling diode in parallel with the load.

(B) Source wiring (negative logic)

(D) Sink wiring (negative logic)