


TM5601



Temperature sensor with process connection

TM-025KCBN14- /US/

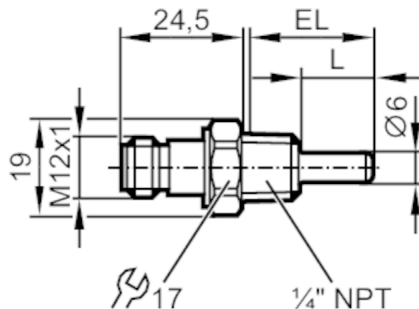

Application		
Measuring element	1 x Pt 1000; (to DIN EN 60751, class A)	
Media	liquids and gases	
Pressure rating	[bar]	400
Note on pressure rating	sensor	
Minimum installation depth	[mm]	When mounted in adapters the specifications of the adapter data sheet apply.
		15
Electrical data		
Protection class	III	
Measuring/setting range		
Probe length L	[mm]	15
Measuring range	-40...150 °C	-40...302 °F
Accuracy / deviations		
Accuracy	[K]	± (0,15 K + 0,002 x t)
Response times		
Dynamic response T05 / T09	[s]	1 / 3
Operating conditions		
Ambient temperature	[°C]	-25...80
Storage temperature	[°C]	-40...100
Protection	IP 68; IP 69K	
Tests / approvals		
Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	22831
UL approval	UL Approval no.	K004

TM5601



Temperature sensor with process connection

TM-025KCBN14- /US/

Mechanical data

Weight	[g]	26.8
Materials		stainless steel (1.4404 / 316L)
Materials (wetted parts)		stainless steel (1.4404 / 316L); FKM
Process connection		threaded connection 1/4" NPT
Probe diameter	[mm]	6
Installation length EL	[mm]	25

Remarks

Remarks	operating voltage "supply class 2" according to cULus
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; Contacts: gold-plated



Connection

