




Evaluation unit with display for PT100/PT1000 temperature sensors

TR-...KDBR12-SFPKG/US/...../V

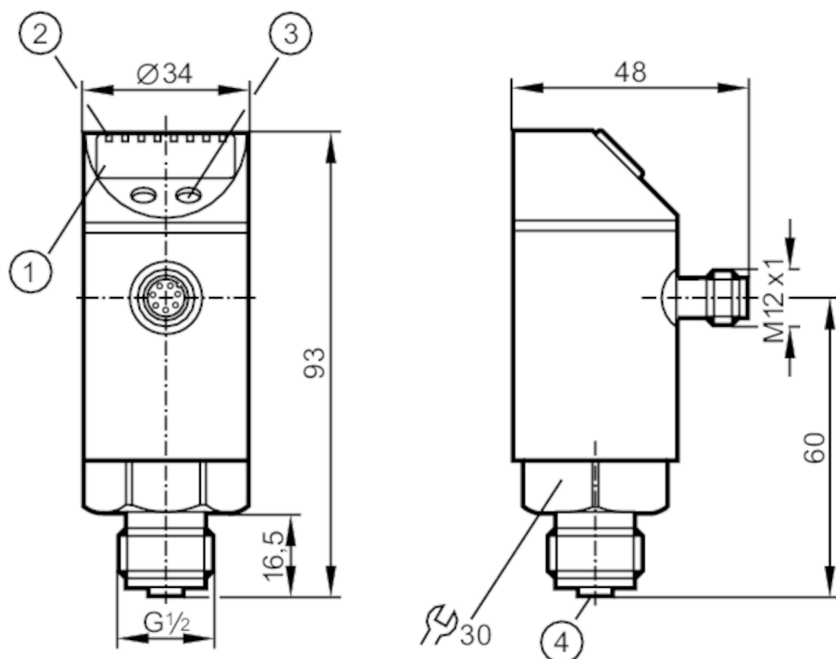

- 1 alphanumeric display 4-digit
- 2 status LEDs
- 3 programming button
- 4 connector for temperature sensor M12 x 1



Application

Application for Pt100 and Pt1000 measuring elements

Electrical data

Operating voltage [V]	18...28 DC; (according to EN 50178 SELV/PELV)
Current consumption [mA]	< 90; (when display is active)
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	1.5
Integrated watchdog	yes

Outputs

Total number of outputs	4
Output signal	switching signal
Electrical design	PNP
Number of digital outputs	4
Output function	normally open / normally closed; (parameterisable)
Max. voltage drop switching output DC [V]	2
Permanent current rating of switching output DC [mA]	500; (max. value for each single output)
Short-circuit protection	yes
Type of short-circuit protection	pulsed
Overload protection	yes



Evaluation unit with display for PT100/PT1000 temperature sensors

TR-...KDBR12-SFPKG/US/...../V

Measuring/setting range		
Measuring range	-40...150 °C	-40...302 °F
Set point SP	-39.8...150 °C	-39.5...302 °F
Reset point rP	-40...149.8 °C	-40...301.5 °F
In steps of	0.2 °C	0.5 °F
Resolution		
Resolution of switching output	[K]	0.2
Resolution of display	[K]	0.2
Accuracy / deviations		
Switch point accuracy	[K]	± 0,2
Display accuracy	[K]	± (0,2 + ½ Digit)
Temperature drift per 10 K	[K]	0.1
Temperature coefficient [% of the span / 10 K]	in case of deviation from the reference condition 25 ± 5 °C	
Response times		
Response time	[ms]	200
Software / programming		
Adjustment of the switch point	programming button	
Parameter setting options	hysteresis / window; normally open / normally closed; min/ max memory reset; Display unit; zero-point calibration	
Operating conditions		
Ambient temperature	[°C]	-25...70
Storage temperature	[°C]	-40...85
Protection	IP 67	
Tests / approvals		
EMC	DIN EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	DIN EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN IEC 68-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	20 g (10...2000 Hz)
MTTF	[years]	175
Mechanical data		
Weight	[g]	265
Materials	stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); EPDM/X; PC; PBT; FKM	
Process connection	threaded connection G 1/2 external thread	
Displays / operating elements		
Display	Display unit	2 x LED, green
	switching status	4 x LED, yellow
	function display	alphanumeric display, 4-digit
	measured values	alphanumeric display, 4-digit

TR8430




Evaluation unit with display for PT100/PT1000
temperature sensors

TR-...KDBR12-SFPKG/US/...../V

Remarks	
Remarks	n.c. = not used
	referring to UL: for use on a low voltage circuit with overcurrent protection
	in accordance with UL873 tab. 28.1 or $I_{max} = 100/U_b$ (U_b = voltage of the circuit)
	total current rating of the unit: max. 1 A
	Two outputs can be switched in parallel to achieve a total current rating of 1 A.
Notes	Switch-on points and switch-off points and the programming of the outputs must correspond exactly.
	discontinued article; For 8-pole sockets the core colours are not standardised.; Please note the wiring of the sensor and the sockets (see data sheet).
Pack quantity	1 pcs.

Electrical connection

Connector: 1 x M12; Contacts: gold-plated



Connection

