

TS2051




Temperature cable sensor with process connection

TS-200KCKD10-...../US/

Status Archive

TS2069

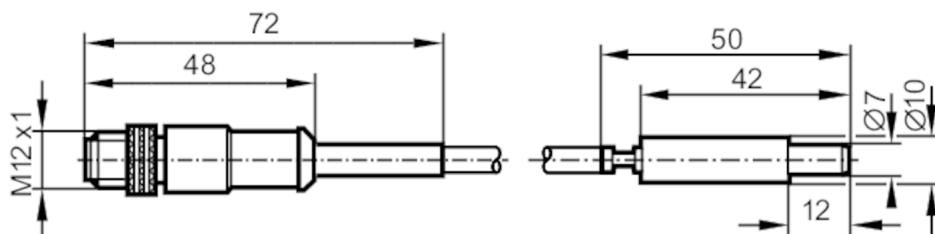

Application

Measuring element	1 x Pt 1000; (to DIN EN 60751, class B)
Media	liquids and gases
Pressure rating [bar]	160
Note on pressure rating	for mounting in progressive ring fitting
Minimum installation depth [mm]	15

Electrical data

Protection class	III
------------------	-----

Measuring/setting range

Probe length L	[mm]	42	
Measuring range		-40...150 °C	-40...302 °F

Accuracy / deviations

Accuracy [K]	$\pm (0,30 \text{ K} + 0,005 \times t)$
--------------	---

Response times

Dynamic response T05 / T09 [s]	6 / 25; (to DIN EN 60751)
--------------------------------	---------------------------

Operating conditions

Ambient temperature [°C]	-25...80
Note on ambient temperature	plug area
Protection	IP 67

Tests / approvals

MTTF [years]	22831.05
--------------	----------

Mechanical data

Weight [g]	113.2
Dimensions [mm]	Ø 10
Materials	stainless steel; FKM
Materials (wetted parts)	stainless steel (1.4404 / 316L)
Probe diameter [mm]	10
Installation length EL [mm]	42

TS2051



Temperature cable sensor with process connection

TS-200KCKD10-...../US/

Remarks

Remarks	The values for accuracy apply to flowing water.
Notes	discontinued article
Pack quantity	1 pcs.


Electrical connection

Cable: 2 m, FKM

Connector: 1 x M12; Contacts: gold-plated



Connection

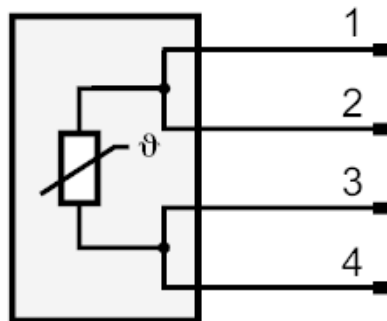

Status Archive

TS2069