



Main

Range of product	Modicon Premium Automation platform
Product or component type	Analog input module
Input level	High level
Analogue input number	16
Analogue input type	Voltage 1...5 V Voltage 0...5 V Voltage 0...10 V Voltage +/- 10 V Current 4...20 mA Current 0...20 mA
Analog/Digital conversion	12 bits

Complementary

Nominal read cycle time	51 ms
Fast read cycle time	3 ms + 3 ms x number of channels used
Measurement error	0.32 % of full scale 4...20 mA 0...60 °C 0.32 % of full scale 0...20 mA 0...60 °C 0.16 % of full scale 4...20 mA 25 °C 0.16 % of full scale 0...20 mA 25 °C 0.13 % of full scale 1...5 V 0...60 °C 0.13 % of full scale 0...5 V 0...60 °C 0.13 % of full scale 0...10 V 0...60 °C 0.13 % of full scale +/- 10 V 0...60 °C 0.1 % of full scale 1...5 V 25 °C 0.1 % of full scale 0...5 V 25 °C 0.1 % of full scale 0...10 V 25 °C 0.1 % of full scale +/- 10 V 25 °C
Isolation between channels and bus	1000 Vrms
Isolation between channels and ground	1000 Vrms
Isolation between channels	Common point
Common mode between channels	None
Maximum overvoltage on input	-30...30 V at state 1 250 kOhm -15...15 V at state 0 250 kOhm
Electrical connection	2 connectors SUB-D 25
Overcurrent	-30...30 mA at state 1 250 kOhm
Marking	CE
Current consumption	270 mA 5 V DC
Module format	Standard
Product weight	0.34 kg

Environment

Standards	IEC 1131
Product certifications	ABS BV DNV GL LR RINA RMRS
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	5...95 % without condensation for storage 10...95 % without condensation for operation

Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0848 - Schneider Electric declaration of conformity download declaration of conformity

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks




(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

Analog Input Module (16-Channel, Voltage/Current)

Connector Pin Assignment

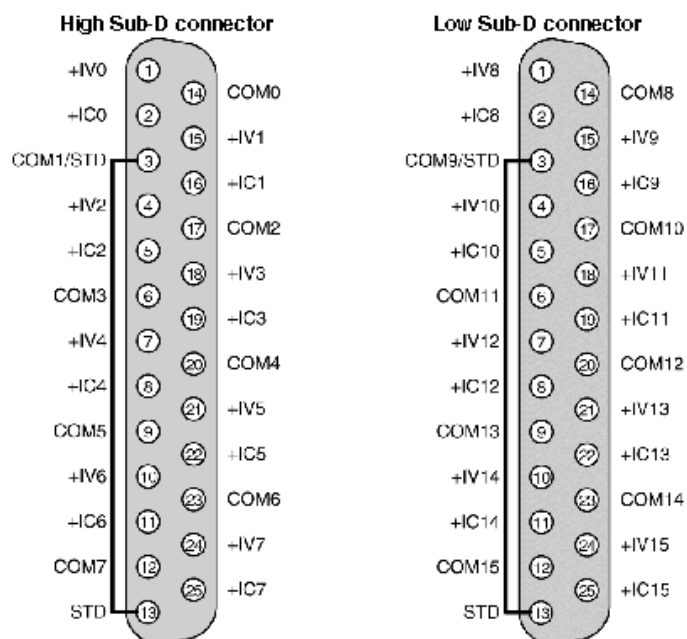

+IVx + Pole voltage input of channel x

+ICx + Pole current input of channel x

COMx Pole current or voltage input of channel x

STD The "strap" between pins 3 and 13 detects the unplugging of the connector.

NOTE: The COMx pins are linked internally in the module.