



Main

Range of product	Modicon Premium Automation platform
Product or component type	Discrete input module
Discrete input number	16 capacitive isolated conforming to EN/IEC 61131-2 type 2
Discrete input voltage	220 V AC
Network frequency	50/60 Hz 47...63 Hz AC
Sensor power supply	170...264 V
Input compatibility	With 2-wire/3-wire proximity sensors conforming to EN/IEC 60947-5-2
Discrete input current	15 mA

Complementary

Voltage state 1 guaranteed	159 V
Current state 1 guaranteed	6 mA
Voltage state 0 guaranteed	40 V
Current state 0 guaranteed	4 mA
Input impedance	20000 Ohm at state 1
Response time	<= 20 ms 10 ms
Isolation resistance	< 10 MOhm 500 V DC
Power dissipation	0.97 W
Electrical connection	Screw terminal
Marking	CE
Current consumption	80 mA 5 V DC
Module format	Standard
Product weight	0.36 kg

Environment

Dielectric strength	1500 V AC at 50/60 Hz
Standards	73/23/EEC 89/336/EEC 92/31/EEC 93/68/EEC CSA 22-2 No 142 CSA 22-2 No 213 Class I Division 2 Group A CSA 22-2 No 213 Class I Division 2 Group B CSA 22-2 No 213 Class I Division 2 Group C CSA 22-2 No 213 Class I Division 2 Group D EN/IEC 61131-2 IEC 60664 UL 508
Product certifications	ABS BV DNV GL LR RINA RMRS
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	5...95 % without condensation for storage 10...95 % without condensation for operation

Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0903 - Schneider Electric declaration of conformity download declaration of conformity

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks




(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

200...240 Vac Discrete Input 16-Channel Module

Wiring Diagram

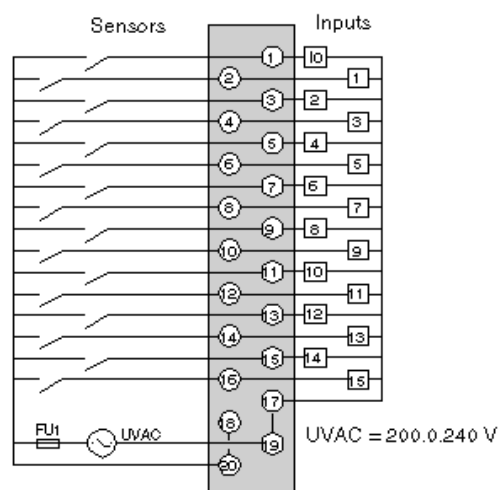

FU1 0.5 A quick-blow fuse