



Main

Range of product	Modicon Premium Automation platform
Product or component type	Discrete input module
Discrete input number	32 current sink isolated conforming to EN/IEC 61131-2 type 2
Discrete input voltage	48 V DC positive
Sensor power supply	38...60 V
Input compatibility	With 2-wire/3-wire proximity sensors conforming to EN/IEC 60947-5-2
Discrete input current	7 mA

Complementary

Voltage state 1 guaranteed	≥ 30 V
Current state 1 guaranteed	≥ 6.5 mA
Voltage state 0 guaranteed	≤ 10 V
Current state 0 guaranteed	≤ 2 mA
Input impedance	6300 Ohm at state 1
Response time	≤ 7 ms 4 ms
Isolation resistance	< 10 MOhm 500 V DC
Power dissipation	(2 W + 0.1 W x No of channels used)
Electrical connection	HE-10 connector
Marking	CE
Current consumption	275 mA 24 V DC 140 mA 5 V DC
Module format	Standard
Product weight	0.31 kg

Environment

Dielectric strength	1500 V AC at 50/60 Hz
Standards	73/23/EEC 89/336/EEC 92/31/EEC 93/68/EEC CSA 22-2 No 142 CSA 22-2 No 213 Class I Division 2 Group A CSA 22-2 No 213 Class I Division 2 Group B CSA 22-2 No 213 Class I Division 2 Group C CSA 22-2 No 213 Class I Division 2 Group D EN/IEC 61131-2 IEC 60664 UL 508
Product certifications	ABS BV DNV GL LR RINA RMRS
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	5...95 % without condensation for storage 10...95 % without condensation for operation

Operating altitude	0...2000 m
Protective treatment	TC
IP degree of protection	IP20
Pollution degree	2

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0840 - Schneider Electric declaration of conformity download declaration of conformity

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks




(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

48 Vdc Discrete Input 32-Channel Module

Wiring Diagram

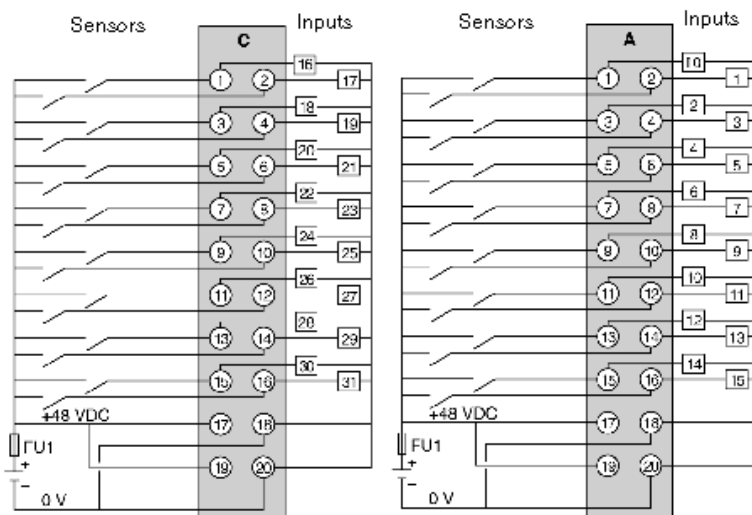

FU1 0.5 A quick-blow fuse