



Main

Range of product	Modicon Premium Automation platform
Product or component type	Discrete output module
Discrete output number	32
Discrete output type	Solid state protected
Discrete output voltage	24 V DC positive conforming to EN/IEC 61131-2 19...30 V

Complementary

Current per channel	≤ 0.1 A
Current per module	≤ 3.2 A
Leakage current	< 0.1 mA 30 V
Tungsten load	≤ 1.2 W
[Ures] residual voltage	< 1.5 V
Response time	1.2 ms
Paralleling of outputs	Yes : 3 maximum
Output overvoltage protection	By transil diode
Reverse polarity protection	Reverse mounted diode
Output overload protection	Automatic trip
Short-circuit protection	Automatic trip
Load impedance	> 220 W at state 1
Isolation resistance	> 10 MOhm 500 V
Power dissipation	(1.6 W + 0.1 W x No of outputs)
Product compatibility	Dial and Power
Marking	CE
Electrical connection	2 connectors HE-10
Current consumption	140 mA 5 V DC
Module format	Standard
Product weight	0.3 kg

Environment


Dielectric strength	1500 V 50/60 Hz 60 s
Standards	73/23/EEC 89/336/EEC 92/31/EEC 93/68/EEC CSA 22-2 No 142 CSA 22-2 No 213 Class I Division 2 Group A CSA 22-2 No 213 Class I Division 2 Group B CSA 22-2 No 213 Class I Division 2 Group C CSA 22-2 No 213 Class I Division 2 Group D IEC 61131-2 UL 508
Product certifications	ABS BV DNV GL LR RINA RMRS
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-25...70 °C
Relative humidity	5...95 % without condensation for storage 10...95 % without condensation for operation
Operating altitude	0...2000 m
Protective treatment	Conformal coating Humiseal 1A33 TC
IP degree of protection	IP20
Pollution degree	2

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0910 - Schneider Electric declaration of conformity download declaration of conformity

Standard and Extendable Racks for Modules Mounting

Dimensions of Modules and Racks

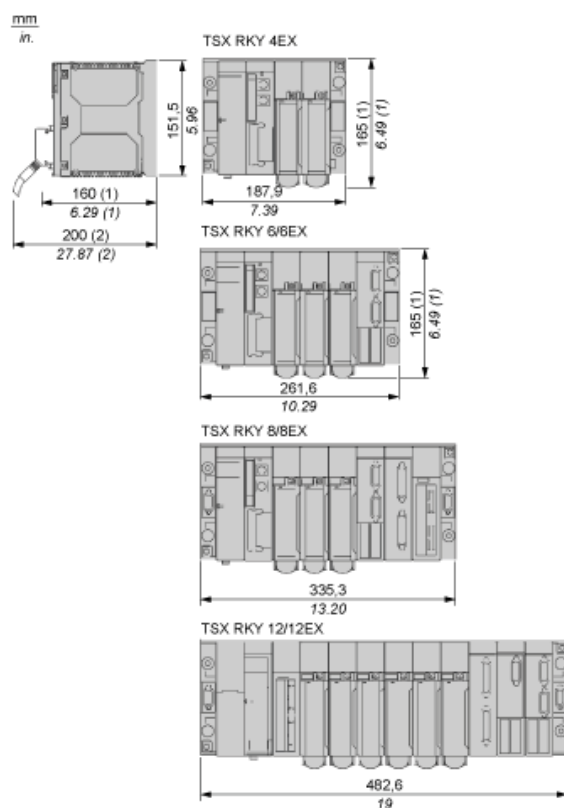


(1) With screw terminal block modules.

(2) Maximum depth for all types of modules and their associated connectors.

Discrete Transistor Output 32-Channel Module for Direct Current

Wiring Diagram

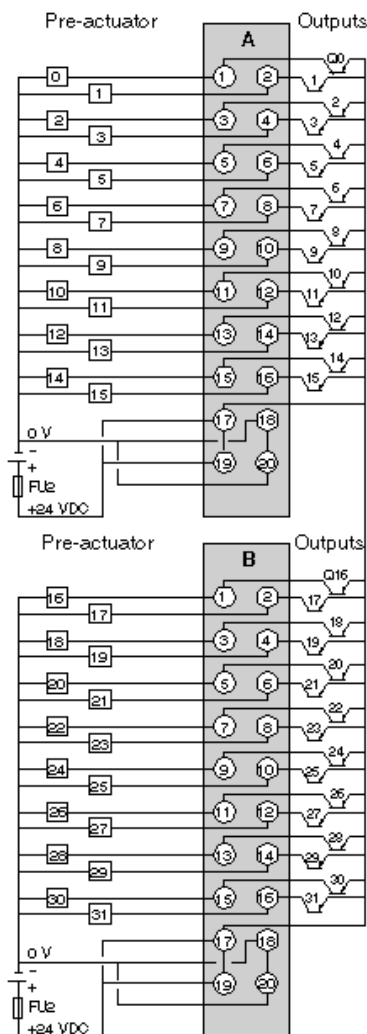

FU2 2 A quick-blow fuse.

NOTE: It is compulsory to connect:

- the + 24 VDC to terminals 17 and 19;
- the 0 V to terminals 18 and 20.