



Main

Range of product	Modicon TSX Micro automation platform
Product or component type	Relay discrete output module
Discrete output number	8 screw terminal block
Contacts type and composition	NO

Complementary

Output voltage limits	10...34 V DC 19...264 V AC
[I _{th}] conventional free air thermal current	3 A
Power consumption in VA	110 VA 110 V AC-15 inductive 220 VA 220 V AC-15 inductive 24 VA 48 V AC-15 inductive 24 VA 24 V AC-15 inductive 220 VA 220 V AC-12 resistive 220 VA 110 V AC-12 resistive 110 VA 48 V AC-12 resistive 50 VA 24 V AC-12 resistive
Power consumption in W	24 V DC-13 inductive 24 V DC-12 resistive
Response time	< 10 ms
Current consumption	85 mA
Power dissipation in W	1.5 W
Isolation voltage	1500 V 1 s
Insulation resistance	>= 10 mOhm


Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Will not be Compliant

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Pre-Actuators/Outputs Connections

Wiring Diagram

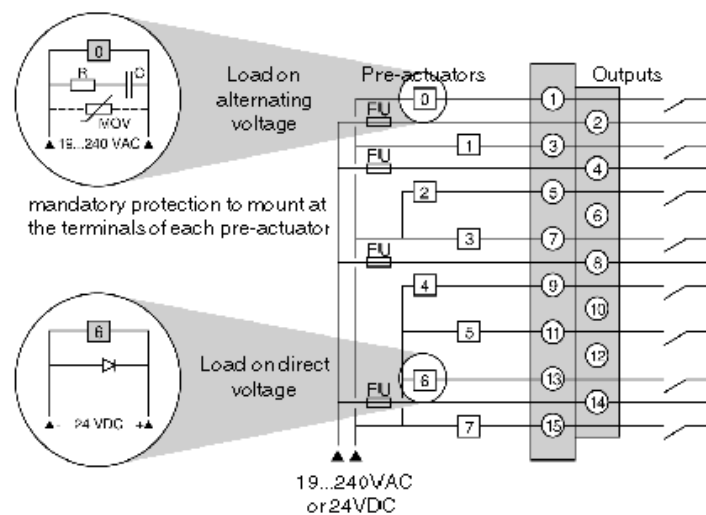

FU = Fast blow fuses to be calibrated according to the load.