

TSXSCP111

PCMCIA card type III - for Atrium co-processor/
Premium processor - RS232 D

Main

Range of product	Modicon Premium Automation platform
Accessory / separate part category	Communication accessories
Accessory / separate part type	Card
Accessory / separate part designation	PCMCIA card
Product compatibility	TSX37-21/22 TSXSCY21601
Accessory / separate part destination	Atrium co-processor Premium processor


Complementary

Memory type	PCMCIA card type III
Physical interface	RS232 D
Communication port protocol	Character mode Modbus Uni-Telway
Current consumption	140 mA 5 V DC
Product weight	0.105 kg

Point to Point Connection in Character Mode (DTE to DTE)

Cabling Accessories

The RS 232 physical support card is inserted either in the processor or in the TSXSCY21601 module. It can be connected to a DTE (Data Terminal Equipment) such as a terminal or a printer through a TSXSCPCD1030 or a TSXSCPCD1100 cable.

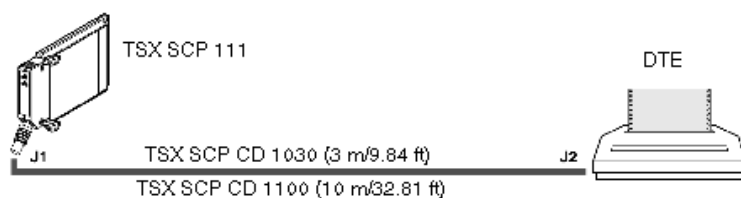

Connection to a Uni-Telway, Modbus or Character Mode DCE

Cabling Accessories

The PCMCIA card can be connected to a Uni-Telway, Modbus or Character Mode DCE (Data Circuit-terminating Equipment) such as a modem through a TSXSCPCC1030 cable.

