


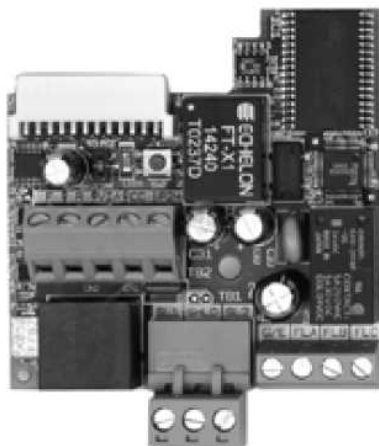

Main

Product or component type	Communication cards
Range compatibility	Altivar 21
Communication port protocol	BACnet
Transmission rate	9.6...76.8 kbps

Complementary

Electrical connection	Removable 4-way screw terminal block
Communication service	Analog inputs (AI) Analog outputs (AO) Analogue values BACnet standardized profile B-ASC Binary inputs (BI) Binary outputs (BO) Binary values Read/Write (single or multiple) property requests
Display type	1 LED for COM (data exchange) 1 LED for ERR (fault) Graphic display terminal for valid and invalid frame counters
Product weight	0.2 kg

Environment

RoHS EUR status	Compliant
RoHS EUR conformity date	0922