


ATV cabinets

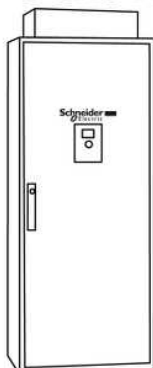

Main

Product or component type	Communication card
Range compatibility	Altivar 61 Plus Altivar 71 Plus
Communication port protocol	Modbus TCP
Product specific application	For daisy chain mounting
Connector type	1 RJ45
Transmission rate	10 Mbps 100 Mbps
Physical interface	Ethernet 2
Web services	Altivar chart Altivar viewer Data editor E-mail Ethernet statistics FDR Agent IO Scanner Security

Complementary

Exchange mode	Half duplex and full duplex
Communication data link	LLC : IEEE 802.2 MAC : IEEE 802.3
Communication network type	IP conforming to RFC791
Communication transport type	TCP conforming to RFC793 8 connections maximum UDP
Concept	Transparent Ready class C20
Web server	Embedded
Communication service	Write single register (06) Write multiple registers (16) TFTP SNMP Read/Write multiple registers (23) Read input registers (04) Read holding registers (03) Read device identification (43) I/O scanning service can be inhibited FTP Diagnostics (08) Communication monitoring can be inhibited, adjustable I/O profile CiA 402 profile
Display type	Web server Graphic display terminal for reference received Graphic display terminal for control word received 1 LED for TX (transmission) 1 LED for STS (IP address) 1 LED for RX (reception) 1 LED for FLT (Ethernet fault) 1 LED for 10/100 Mbps (speed)
Product weight	0.3 kg