


ATV cabinets

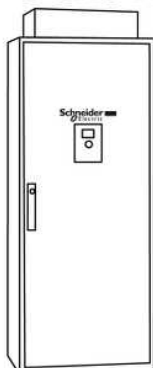

Main

Product or component type	Communication card
Range compatibility	Altivar 61 Plus Altivar 71 Plus
Communication port protocol	CC-Link
Connector type	Removable screw connector, 5 contacts at intervals of 3.81
Transmission rate	10 Mbps 156 kbps 2.5 Mbps 5 Mbps 625 kbps
Physical interface	2-wire RS 485

Complementary

Number of addresses	1...64
Communication service	CC-Link drive profile I/O data Communication monitoring
Display type	Graphic display terminal for transmission speed used Graphic display terminal for drive address 1 LED for SD (Send Data) 1 LED for RD (Receive Data) 1 LED for power 1 LED for L.RUN (Running) 1 LED for L.ERR (Error)
Product weight	0.3 kg