



Main

Range of product	Altivar Lexium
Product or component type	EMC input filter
Range compatibility	Altivar 32 Lexium 32 Lexium 28 Altivar Machine ATV320
Product compatibility	LXM28A ATV32, 200...240 V, 1.1...1.5 kW LXM32, single-phase, line current 8.4...12.9 A Variable speed drive ATV320...B at 1.1 kW, 200...240 V, single phase Variable speed drive ATV320...B at 1.5 kW, 200...240 V, single phase
Product specific application	Radio interference input filter
Mounting location	At variable speed drive side
Network number of phases	Single phase


Complementary

Cable length	<= 20 m conforming to IEC 61800-3 category C1 <= 50 m conforming to IEC 61800-3 category C2
[In] rated current	17.6 A
Thermal losses	6.9 W
Network rated voltage	200...240 V
Tolerance	- 15...10 %
Product weight	0.775 kg
Emc filter compatibility	Type 021

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0943 - Schneider Electric declaration of conformity

Additional EMC Input Filters

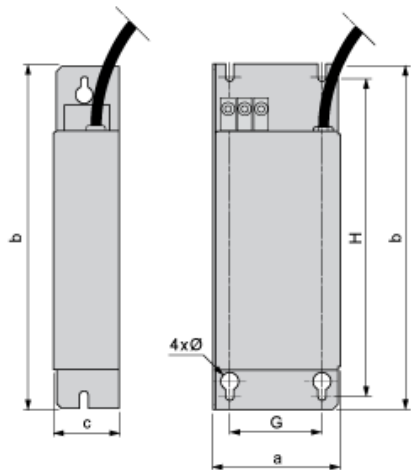

Dimensions in mm


a	b	c	G	H	Ø
107	195	35	85	180	4.5

Dimensions in in.


a	b	c	G	H	Ø
4.21	7.68	1.38	3.35	7.09	0.18

Mounting Recommendations

Mounting the Filter on the Side of the Drive

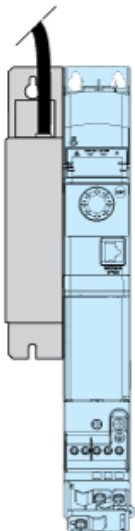

Recommended Schema

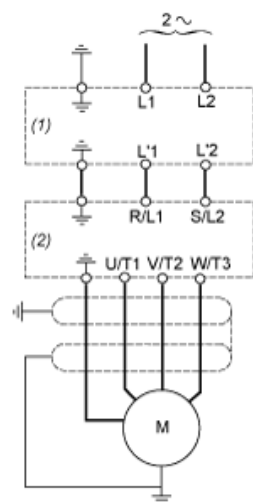

- (1) Filter
- (2) Drive