



Main

Range of product	Lexium
Product or component type	EMC input filter
Range compatibility	Lexium 32 Lexium 28 Lexium 52
Product compatibility	LXM28A LXM32, three-phase, line current 14.6...18.1 A
Product specific application	Radio interference input filter
Mounting location	At variable speed drive side
Network number of phases	Three phase


Complementary

Cable length	<= 20 m conforming to IEC 61800-3 category C1 <= 50 m conforming to IEC 61800-3 category C2
[In] rated current	25 A
Thermal losses	15.8 W
Network rated voltage	380...500 V
Tolerance	- 15...10 %
Product weight	1.35 kg
Emc filter compatibility	Type 023

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 0943 - Schneider Electric declaration of conformity

Additional EMC Input Filters

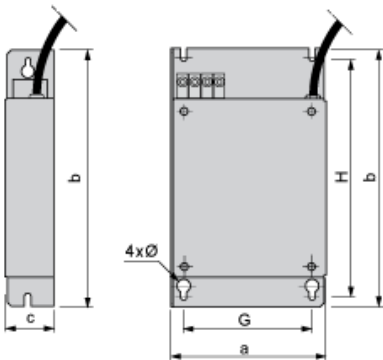

Dimensions in mm


a	b	c	G	H	Ø
140	235	50	120	215	4.5

Dimensions in in.


a	b	c	G	H	Ø
5.51	9.25	1.96	4.72	8.46	0.18

Mounting Recommendations

Mounting the Filter on the Side of the Drive

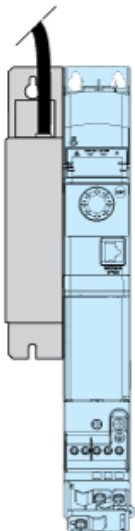

Recommended Schema

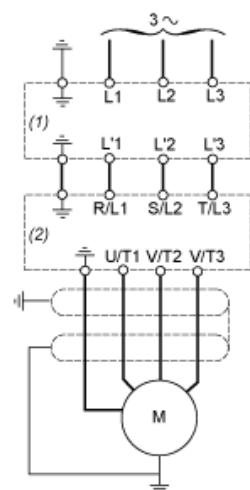

- (1) Filter
- (2) Drive