



### Main

|                              |                                                                                                                 |
|------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Range of product             | Altivar<br>Lexium                                                                                               |
| Product or component type    | EMC input filter                                                                                                |
| Range compatibility          | Altivar 32<br>Lexium 28<br>Altivar Machine ATV320                                                               |
| Product compatibility        | LXM28A<br>ATV32, 200...240 V, 2.2 kW<br>Variable speed drive ATV320...B at 2.2 kW,<br>200...240 V, single phase |
| Product specific application | Radio interference input filter                                                                                 |
| Mounting location            | At variable speed drive side                                                                                    |
| Network number of phases     | Single phase                                                                                                    |


### Complementary

|                          |                                                                                                |
|--------------------------|------------------------------------------------------------------------------------------------|
| Cable length             | <= 20 m conforming to IEC 61800-3 category C1<br><= 50 m conforming to IEC 61800-3 category C2 |
| [In] rated current       | 23.9 A                                                                                         |
| Thermal losses           | 7.5 W                                                                                          |
| Network rated voltage    | 200...240 V                                                                                    |
| Tolerance                | - 15...10 %                                                                                    |
| Product weight           | 1.13 kg                                                                                        |
| Emc filter compatibility | Type 026                                                                                       |

### Offer Sustainability

|                          |                                                                                       |
|--------------------------|---------------------------------------------------------------------------------------|
| Sustainable offer status | Not Green Premium product                                                             |
| RoHS (date code: YYWW)   | Compliant - since 1025 - <a href="#">Schneider Electric declaration of conformity</a> |

Additional EMC Input Filters

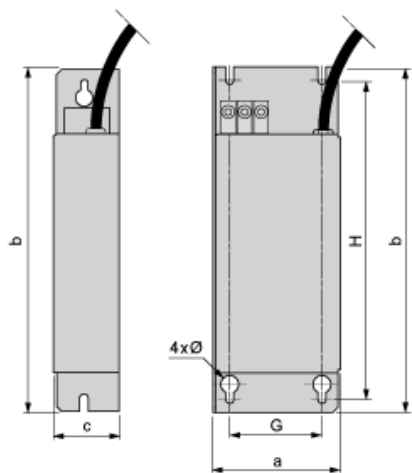

Dimensions in mm

| a   | b   | c  | G   | H   | Ø   |
|-----|-----|----|-----|-----|-----|
| 140 | 235 | 35 | 120 | 215 | 4.5 |

Dimensions in in.


| a    | b    | c    | G    | H    | Ø    |
|------|------|------|------|------|------|
| 5.51 | 9.25 | 1.38 | 4.72 | 8.46 | 0.18 |

---


## Mounting Recommendations

---

### Mounting the Filter on the Side of the Drive

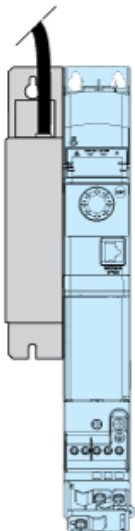

## Recommended Schema

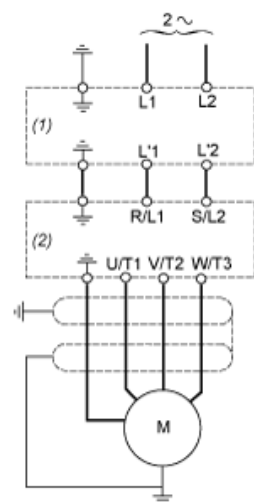

- (1) Filter
- (2) Drive