



Main

Product or component type	Sinus filter
Range compatibility	Altivar 61 Altivar 71 Altivar 61Q Altivar 71Q
Product specific application	Output filter
[In] rated current	200 A
Thermal losses	945 W at 100 Hz
Product compatibility	ATV61HC11N4 ATV61HD90N4 ATV61WD90N4 ATV61WD90N4C ATV71HC11N4 ATV71HD90N4 ATV61QC11N4 ATV71QD90N4 ATV71QC11N4
Switching frequency	4...8 kHz
Output frequency	0...100 Hz
Maximum permissible voltage	500 V AC

Complementary


Electrical connection	Terminal, connection capacity: 95 mm ² (AWG 4/0) 20 N.m
Voltage drop at rated load	< 10 %
Max current	1.5 x nominal current for 60 s
Product weight	130 kg

Environment

IP degree of protection	IP00
Environmental characteristic	3S1 conforming to IEC 721-3-3 3C2 conforming to IEC 721-3-3 3B1 conforming to IEC 721-3-3
Pollution degree	2 conforming to EN 50178
Vibration resistance	1.5 mm peak to peak (f = 3...13 Hz) conforming to IEC 60068-2 1 gn (f = 13...200 Hz) conforming to IEC 60068-2
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27
Relative humidity	<= 95 %
Ambient air temperature for operation	-10...40 °C without current derating > 40...50 °C with current derating 1.5 % per °C
Ambient air temperature for storage	-40...65 °C
Operating altitude	1000...3000 m with current derating 1 % per 100 m <= 1000 m without current derating

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions

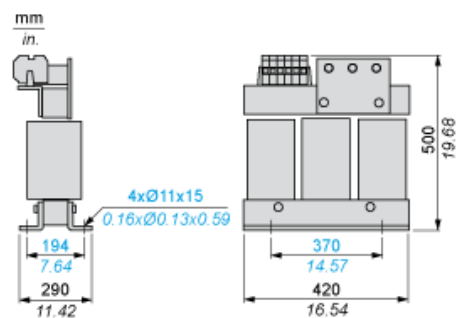

Mounting Recommendations

