



Main

Product or component type	Braking resistor
---------------------------	------------------

Complementary

Range compatibility	Altivar Machine ATV340 Altivar Process ATV900
Product compatibility	Variable speed drive ATV930 wall mount 18.5 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 22 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 30 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 18.5 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 22 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 30 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 5.5 kW 200...240 V severe cycle Variable speed drive ATV340 15 kW 380...480 V medium cycle Variable speed drive ATV340 18 kW 380...480 V medium cycle Variable speed drive ATV340 22 kW 380...480 V medium cycle Variable speed drive ATV930 22 kW 500...690 V medium cycle Variable speed drive ATV930 30 kW 500...690 V medium cycle Variable speed drive ATV930 37 kW 500...690 V medium cycle Variable speed drive ATV930 32 hp 600 V medium cycle Variable speed drive ATV930 40 hp 600 V medium cycle Variable speed drive ATV930 50 hp 600 V medium cycle
Braking cycle	Severe cycle (heavy duty) <54 s braking with 100 % braking torque for a 120 s cycle Medium cycle (normal duty) <4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (heavy duty) <4 s braking with 165 % braking torque for a 40 s cycle Severe cycle (heavy duty) <6 s braking with 165 % braking torque for a 120 s cycle
Average power available	2.2 kW at 50 °C
Ohmic value	16 Ohm
Electrical connection	terminal, connection capacity: <= 10 mm ² / AWG 8 for drive terminal, connection capacity: <= 2.5 mm ² / AWG 12 for temperature control switch
Protection type	Thermal protection via drive or temperature control switch at 120 °C
[Ue] rated operational voltage	24 V DC 250 V AC
Width	290 mm
Height	570 mm
Depth	180 mm
Product weight	6.4 kg

Environment

Ambient air temperature for operation	0...50 °C
Ambient air temperature for storage	-25...70 °C
IP degree of protection	IP20

Offer Sustainability


EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

Right Side and Front View

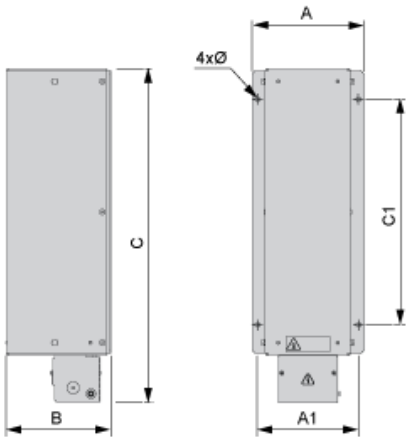

Dimensions in mm

A	B	C	A1	C1	Ø
290	180	570	270	380	6.6 x 9

Dimensions in in.


A	B	C	A1	C1	Ø
11.42	7.09	22.44	10.63	14.96	0.26 x 0.35

Mounting and Clearance




(1) Braking resistor

mm
in.

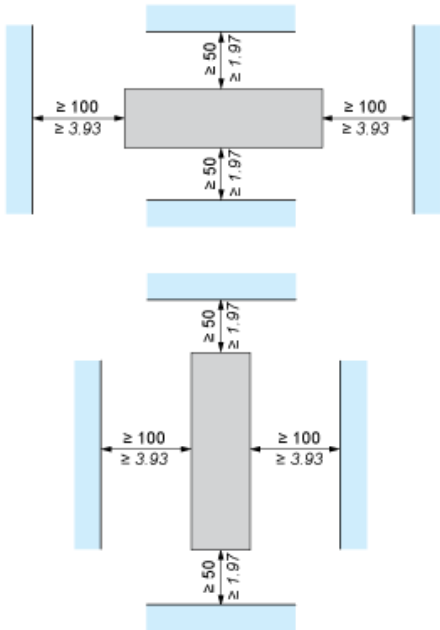


Recommended Schema

1 Braking Resistor



A1 : Drive or external braking unit
A2 : Braking resistor
PA, PB : Bus DC
T1, T2 : Temperature control switch

2 Braking Resistors

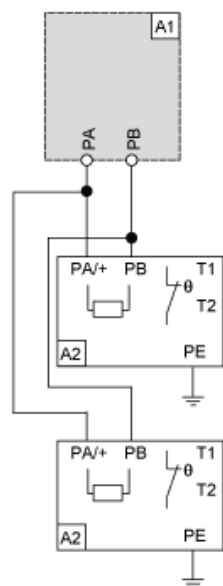

A1 : Drive or external braking unit
A2 : Braking resistor
PA, PB : Bus DC
T1, T2 : Temperature control switch