



Main

Range of product	Harmony XAC
Product or component type	Pendant control station
Control station name	XACD
Control station type	Double insulated
Enclosure material	Polypropylene
Electrical circuit type	Control circuit Power circuit
Enclosure type	Empty enclosure
Number of cut-out	Without cut-out
Cable entry	Rubber sleeve with stepped entry, cable outer diameter: 7...18 mm
Guard rail	Without
Cutout in base of enclosure	Without


Complementary

Control type	Intuitive
Control station colour	Yellow
Mechanical durability	1000000 cycles
Product weight	0.345 kg

Environment

Standards	EN/IEC 60947-5-1 UL 508 CSA C22.2 No 14
Protective treatment	TH
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...70 °C
Vibration resistance	15 gn (f = 10...500 Hz) conforming to IEC 60068-2-6
Shock resistance	70 gn conforming to IEC 60068-2-27
Class of protection against electric shock	Class II conforming to IEC 61140
IP degree of protection	IP65 conforming to IEC 60529
IK degree of protection	IK08 conforming to EN 50102

Dimensions

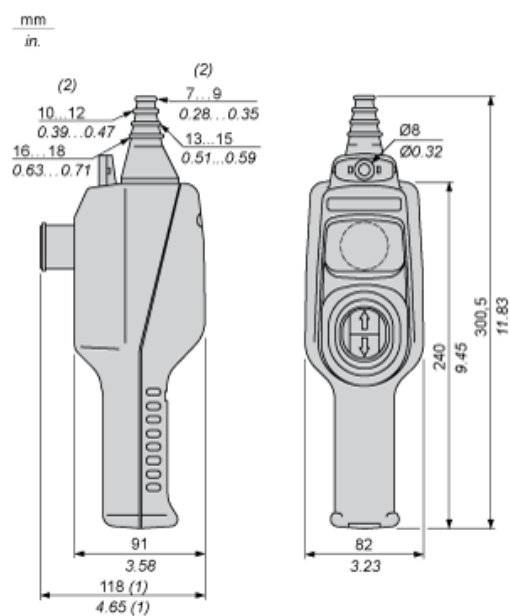

- (1) With trigger action latching Ø 30 mm / 1.18 in. Emergency stop.
(2) Internal Ø