



### Main

|                             |                                                                    |
|-----------------------------|--------------------------------------------------------------------|
| Range of product            | Harmony XAC                                                        |
| Product or component type   | Pendant control station                                            |
| Control station name        | XACF                                                               |
| Control station type        | Double insulated                                                   |
| Enclosure material          | Glass reinforced polyester                                         |
| Electrical circuit type     | Control circuit                                                    |
| Enclosure type              | Empty enclosure                                                    |
| Number of cut-out           | Without cut-out                                                    |
| Cable entry                 | Rubber sleeve with stepped entry, cable outer diameter: 10...22 mm |
| Guard rail                  | With                                                               |
| Cutout in base of enclosure | Without                                                            |

### Complementary


|                        |                |
|------------------------|----------------|
| Control station colour | Yellow         |
| Mechanical durability  | 1000000 cycles |
| Product weight         | 2.3 kg         |

### Environment


|                                            |                                                     |
|--------------------------------------------|-----------------------------------------------------|
| Standards                                  | EN/IEC 60947-5-1<br>UL 508<br>CSA C22.2 No 14       |
| Protective treatment                       | TH                                                  |
| Ambient air temperature for operation      | -25...70 °C                                         |
| Ambient air temperature for storage        | -40...70 °C                                         |
| Vibration resistance                       | 15 gn (f = 10...500 Hz) conforming to IEC 60068-2-6 |
| Shock resistance                           | 100 gn conforming to IEC 60068-2-27                 |
| Class of protection against electric shock | Class II conforming to IEC 61140                    |
| IP degree of protection                    | IP65 conforming to IEC 60529                        |
| IK degree of protection                    | IK08 conforming to EN 50102                         |

[illegible]

## Protective Cable Sleeves

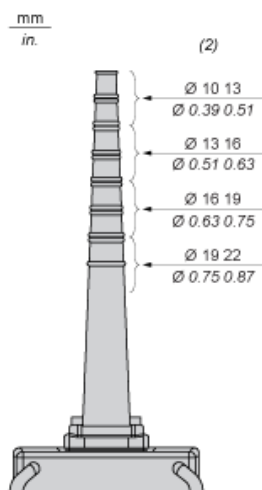

2

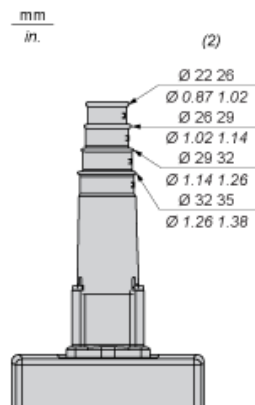


(2) Internal Ø (mm/in.)

---

Mounting of Pendant Box


---

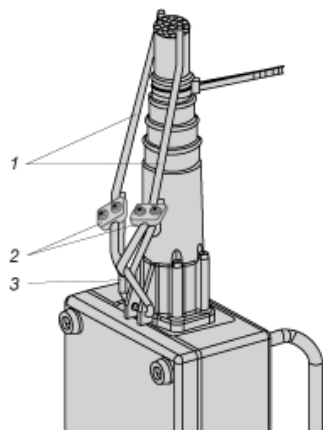

- 1 : Sustentation cables
- 2 : Cables clamp
- 3 : Ring


### Control of Single-Speed Reversing Motor

With XESD1181 contact block, to be ordered separately

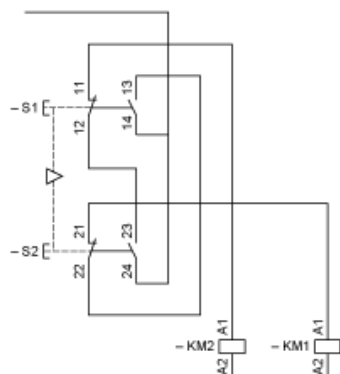

### Control of 2-Speed Reversing Motor

With XESD1281 contact block, to be ordered separately

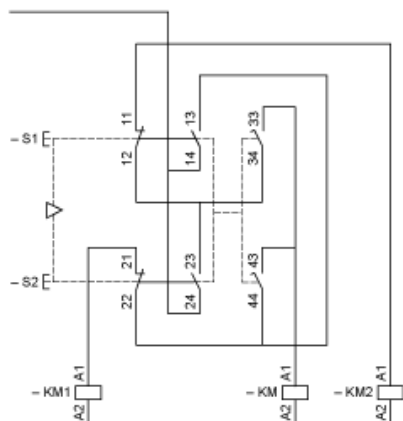

KM High speed contactor