


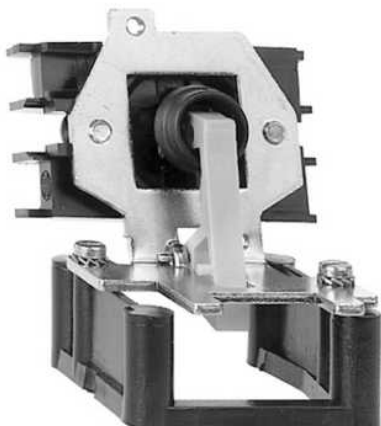

Main

Range of product	Harmony XAC
Product or component type	Isolating block
Component name	XACS
Electrical circuit type	Power circuit
Contact block application	Emergency stop pushbutton
Contact block type	Single
Type of operator	Spring return
Product compatibility	XACB ZA2BS14 head
Mechanical interlocking	Without mechanical interlock
Contacts type and composition	3 NC
Mounting of block	Base mounting
Contacts operation	Snap action

Complementary

Connections - terminals	Screw clamp terminals, connection capacity: 2 x 1.5 mm ² with or without cable end Screw clamp terminals, connection capacity: 1 x 2.5 mm ² with or without cable end
Mechanical durability	1000000 cycles
Contact code designation	Q300 DC-13, U _e = 250 V, I _e = 0.27 A conforming to IEC 60947-5-1 appendix A A300 AC-15, U _e = 240 V, I _e = 3 A conforming to IEC 60947-5-1 appendix A
[Ui] rated insulation voltage	400 V (degree of pollution: 3) conforming to IEC 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947-1
Rated operational power in W	3000 W AC-23B at 400 V
Terminals description ISO n°1	(11-12)NC (21-22)NC (31-32)NC
Terminal identifier	(11-12)NC (13-14)NO
Product weight	0.11 kg

Environment

Standards	EN 60947-3 IEC 60947-3 CSA C22.2 No 14
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...70 °C
Vibration resistance	15 gn (f = 10...500 Hz) conforming to IEC 60068-2-6
Shock resistance	100 gn conforming to IEC 60068-2-27
Class of protection against electric shock	Class II conforming to IEC 61140