

XALFKT6445

hoistway box XALF for lift inspection- 1
mushroom head emergency stop pb-1NO+1NC



Main

Range of product	Harmony XALF
Product or component type	Hoistway box
Device short name	XALF
Product specific application	Lift inspection
Operator profile	1 mushroom head pushbutton
Operator description	Red unmarked 1 NO + 1 NC
Contacts operation	Slow-break

Complementary


Material	Polycarbonate
Product weight	0.165 kg
Marking	CE
Contacts material	Silver alloy (Ag/Ni)

Environment

Protective treatment	TH
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	0...50 °C
Standards	EN 81-1 EN/IEC 60947-1 EN/IEC 60947-5-1 EN/IEC 60947-5-4 EN/IEC 60947-5-5

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions

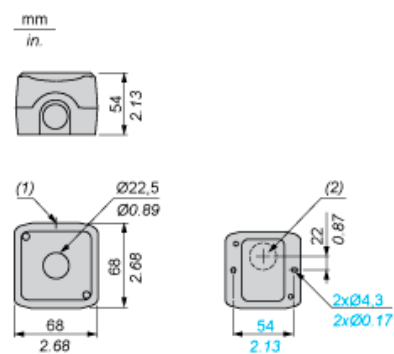

- (1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm / 0.47 in.
(2) Knock-out for cable entry, maximum capacity 14 mm / 0.55 in.