



## Main

|                              |                                        |
|------------------------------|----------------------------------------|
| Range of product             | Harmony XALF                           |
| Product or component type    | Hoistway box                           |
| Device short name            | XALF                                   |
| Product specific application | Lift inspection                        |
| Operator profile             | 1 illuminated mushroom head pushbutton |
| Operator description         | Red unmarked 1 NO + 1 NC               |
| Contacts operation           | Slow-break                             |


## Complementary

|                     |                      |
|---------------------|----------------------|
| Material            | Polycarbonate        |
| Product weight      | 0.185 kg             |
| Marking             | CE                   |
| Contacts material   | Silver alloy (Ag/Ni) |
| Light source colour | White                |

## Environment

|                                       |                                                                                       |
|---------------------------------------|---------------------------------------------------------------------------------------|
| Protective treatment                  | TH                                                                                    |
| Ambient air temperature for storage   | -40...70 °C                                                                           |
| Ambient air temperature for operation | 0...50 °C                                                                             |
| Standards                             | EN 81-1<br>EN/IEC 60947-1<br>EN/IEC 60947-5-1<br>EN/IEC 60947-5-4<br>EN/IEC 60947-5-5 |

## Dimensions

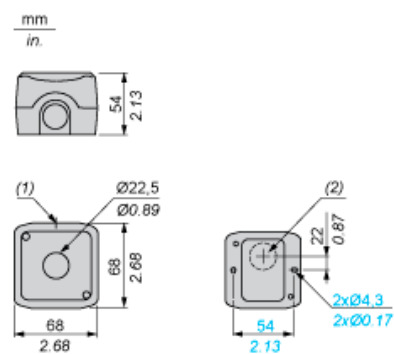

- (1) 2 knock-outs for Pg 13.5 cable gland, maximum capacity 12 mm / 0.47 in.  
(2) Knock-out for cable entry, maximum capacity 14 mm / 0.55 in.