


# XAPA4116

empty control station - XAP-A - plastic - 16  
openings in 4 columns

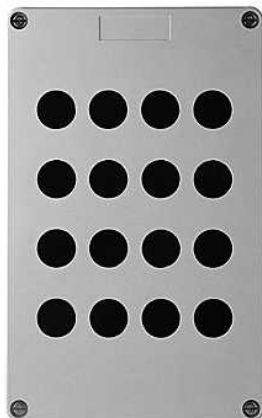

## Main

|                               |                                                                                                                                                                                                                                                      |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XAP                                                                                                                                                                                                                                          |
| Product or component type     | Empty control station with hinges                                                                                                                                                                                                                    |
| Device short name             | XAPA                                                                                                                                                                                                                                                 |
| Product destination           | For Ø 22 mm control and signalling units                                                                                                                                                                                                             |
| Product front plate size      | 151 x 241 mm                                                                                                                                                                                                                                         |
| Usable depth                  | 83 mm                                                                                                                                                                                                                                                |
| Number of cut-out             | 16 cut-outs                                                                                                                                                                                                                                          |
| Colour of base of enclosure   | Grey                                                                                                                                                                                                                                                 |
| Colour of cover               | Grey                                                                                                                                                                                                                                                 |
| Material                      | Glass reinforced polyester                                                                                                                                                                                                                           |
| Cable entry                   | Undrilled                                                                                                                                                                                                                                            |
| Product mounting              | Flush mounting                                                                                                                                                                                                                                       |
| IP degree of protection       | IP657 conforming to NF C 20-010<br>IP65 conforming to IEC 60529                                                                                                                                                                                      |
| Resistance to chemical agents | High resistant to sea water<br>High resistant to petrol<br>High resistant to oils and greases<br>High resistant to mineral salts<br>High resistant to diesel<br>High resistant to bases<br>High resistant to all solvents<br>High resistant to acids |


## Complementary

|                         |                                                 |
|-------------------------|-------------------------------------------------|
| Number of vertical rows | 4                                               |
| Flame retardance        | VO conforming to UL 94<br>M3 conforming to CSTB |
| Product weight          | 0.85 kg                                         |

## Environment

|                                            |                                                                        |
|--------------------------------------------|------------------------------------------------------------------------|
| Protective treatment                       | TC<br>TH                                                               |
| Ambient air temperature for storage        | -40...70 °C                                                            |
| Ambient air temperature for operation      | -25...70 °C                                                            |
| Class of protection against electric shock | Class II conforming to NF C 20-030<br>Class II conforming to IEC 60536 |
| Fire resistance                            | 960 °C conforming to IEC 92<br>850 °C conforming to NF C 20-455        |


Dimensions and Fixing

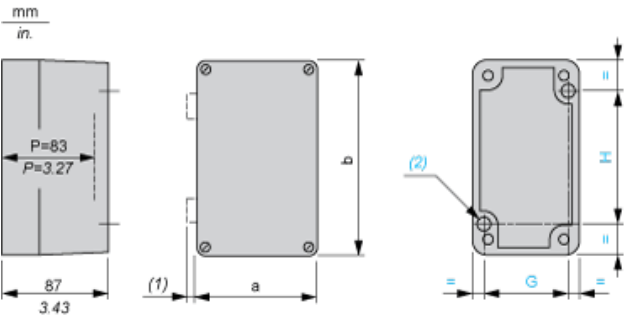

- (1) 11 mm/0.43 in.  
(2) 2 x Ø 5.6 mm/0.22 in. holes, depth 12 mm/0.47 in.  
P Usable depth

| a   |      | b   |      | G   |      | H   |      |
|-----|------|-----|------|-----|------|-----|------|
| mm  | in.  | mm  | in.  | mm  | in.  | mm  | in.  |
| 151 | 5.94 | 241 | 9.49 | 135 | 5.31 | 200 | 7.87 |

Refer to the product characteristics to get the number of cut-outs.  
Cut-out interaxis dimensions (vertical mounting)



- b1 Vertical interaxis: 40 mm/1.57 in.  
b2 Horizontal interaxis: 30 mm/1.18 in.