

### Main

|                               |                                                                                                                                                                                                                                                           |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XAP                                                                                                                                                                                                                                               |
| Product or component type     | Front plate with fixing screws                                                                                                                                                                                                                            |
| Device short name             | XAPE                                                                                                                                                                                                                                                      |
| Product destination           | For Ø 22 mm control and signalling units                                                                                                                                                                                                                  |
| Product front plate size      | 72 x 105 mm                                                                                                                                                                                                                                               |
| Number of cut-out             | 2 cut-outs                                                                                                                                                                                                                                                |
| Material                      | Anodised aluminium                                                                                                                                                                                                                                        |
| Product mounting              | Flush mounting                                                                                                                                                                                                                                            |
| IP degree of protection       | IP657 conforming to NF C 20-010<br>IP65 conforming to IEC 60529                                                                                                                                                                                           |
| Resistance to chemical agents | Good resistant to salts<br>Good resistant to organic acids<br>Good resistant to oils and petrol<br>Good resistant to diluted mineral acids<br>Good resistant to chloride and fluoride solvents<br>Good resistant to alcohols<br>Good resistant to acetone |

### Complementary


|                |          |
|----------------|----------|
| Product weight | 0.075 kg |
|----------------|----------|

### Environment


|                                            |                                                                      |
|--------------------------------------------|----------------------------------------------------------------------|
| Protective treatment                       | TC<br>TH                                                             |
| Ambient air temperature for storage        | -40...70 °C                                                          |
| Ambient air temperature for operation      | -25...70 °C                                                          |
| Class of protection against electric shock | Class I conforming to NF C 20-030<br>Class I conforming to IEC 60536 |

Dimensions and Fixing

Below drawing shows a front plate with 4 cut-outs. Refer to the product characteristics to get the number of cut-outs.

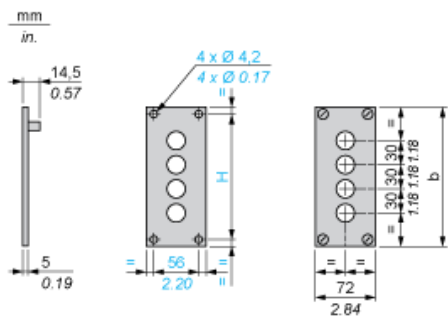

Panel cut-out



| b   |      | b1 |      | H  |      |
|-----|------|----|------|----|------|
| mm  | in.  | mm | in.  | mm | in.  |
| 105 | 4.13 | 77 | 3.03 | 89 | 3.50 |