

# XAPE305

drilled front plate - XAP-E - metal - 5 horizontal openings



## Main

|                               |                                                                                                                                                                                                                                                           |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XAP                                                                                                                                                                                                                                               |
| Product or component type     | Front plate with fixing screws                                                                                                                                                                                                                            |
| Device short name             | XAPE                                                                                                                                                                                                                                                      |
| Product destination           | For Ø 22 mm control and signalling units                                                                                                                                                                                                                  |
| Product front plate size      | 72 x 204 mm                                                                                                                                                                                                                                               |
| Number of cut-out             | 5 cut-outs                                                                                                                                                                                                                                                |
| Material                      | Anodised aluminium                                                                                                                                                                                                                                        |
| Product mounting              | Flush mounting                                                                                                                                                                                                                                            |
| IP degree of protection       | IP657 conforming to NF C 20-010<br>IP65 conforming to IEC 60529                                                                                                                                                                                           |
| Resistance to chemical agents | Good resistant to salts<br>Good resistant to organic acids<br>Good resistant to oils and petrol<br>Good resistant to diluted mineral acids<br>Good resistant to chloride and fluoride solvents<br>Good resistant to alcohols<br>Good resistant to acetone |

## Complementary

|                |          |
|----------------|----------|
| Product weight | 0.135 kg |
|----------------|----------|


## Environment

|                                            |                                                                      |
|--------------------------------------------|----------------------------------------------------------------------|
| Protective treatment                       | TC<br>TH                                                             |
| Ambient air temperature for storage        | -40...70 °C                                                          |
| Ambient air temperature for operation      | -25...70 °C                                                          |
| Class of protection against electric shock | Class I conforming to NF C 20-030<br>Class I conforming to IEC 60536 |


The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Dimensions and Fixing

Below drawing shows a front plate with 4 cut-outs. Refer to the product characteristics to get the number of cut-outs.

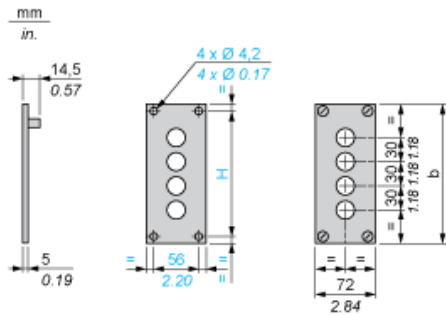

Panel cut-out



| b   |      | b1  |      | H   |      |
|-----|------|-----|------|-----|------|
| mm  | in.  | mm  | in.  | mm  | in.  |
| 204 | 8.03 | 176 | 6.93 | 188 | 7.40 |