




Price* : 215.15 GBP

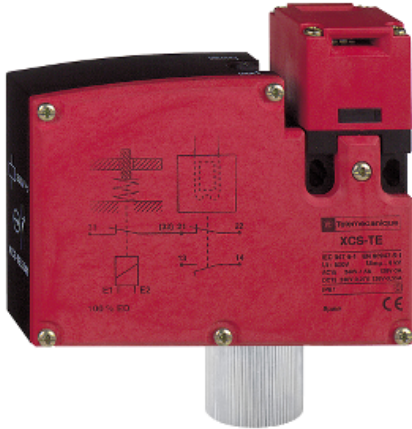

Main

Device short name	XCSTE
Enclosure type	Dust and damp proof enclosure for indoor/outdoor Corrosion resistance enclosure for indoor/outdoor

Complementary

[In] rated current	6 A
[Us] rated supply voltage	24 V
Actuator	Key
Contact operation	Slow-break, break before make
Contacts type and composition	1 NO + 1 NC
Depth	1.3 in
Electromagnet interlocking	Locking on energisation and unlocking on de-energisation of solenoid
Enclosure material	plastic enclosure
Height	3.67 in
Locking options description	With locking of actuator, unlocking by key operated lock With interlocking, locking by solenoid
Number of poles	2
Permissible voltage	300 V AC

Environment

Ambient air temperature for operation	-13...140 °F
IP degree of protection	IP67
NEMA degree of protection	NEMA 4/4X/12

Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration

Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------