




Price* : 202.07 GBP

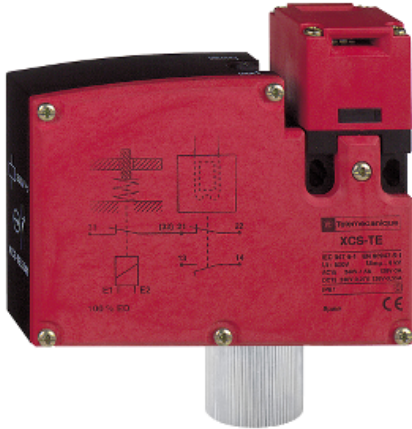

Main

Device short name	XCSTE
Enclosure type	Dust and damp proof enclosure for indoor/outdoor Corrosion resistance enclosure for indoor/outdoor

Complementary

[In] rated current	6 A
[Us] rated supply voltage	24 V
Actuator	Key
Contact operation	Slow make slow break
Depth	1.3 in
Electromagnet interlocking	Locking on de-energisation and unlocking on energisation of solenoid
Enclosure material	plastic enclosure
Height	3.67 in
Locking options description	With locking of actuator, unlocking by key operated lock
Number of poles	2
Permissible voltage	300 V AC

Environment

Ambient air temperature for operation	-13...140 °F
IP degree of protection	IP67
NEMA degree of protection	NEMA 4/4X/12
Product certifications	CE UL listed file E164353 CCN NKCR CSA LR4408794 class 3211 03

Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)

[EU RoHS Declaration](#)

Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Contractual warranty

Warranty	18 months
----------	-----------