




Price\* : 204.79 GBP

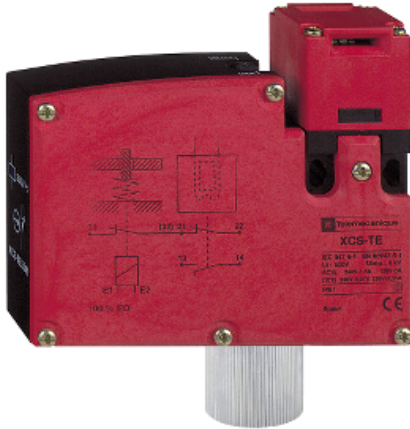

### Main

Device short name	XCSTE
Enclosure type	Dust and damp proof enclosure for indoor/outdoor Corrosion resistance enclosure for indoor/outdoor

### Complementary

[In] rated current	6 A
[Us] rated supply voltage	120 V
Actuator	Key
Contact operation	Slow-break
Contacts type and composition	2 NC
Depth	1.3 in
Electromagnet interlocking	Locking on de-energisation and unlocking on energisation of solenoid
Enclosure material	plastic enclosure
Height	3.67 in
Locking options description	With locking of actuator, unlocking by key operated lock
Number of poles	2
Permissible voltage	300 V AC

### Environment

Ambient air temperature for operation	-13...140 °F
IP degree of protection	IP67
NEMA degree of protection	NEMA 4/4X/12

### Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes

---

RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

---

**Contractual warranty**

---

Warranty	18 months
----------	-----------

---