


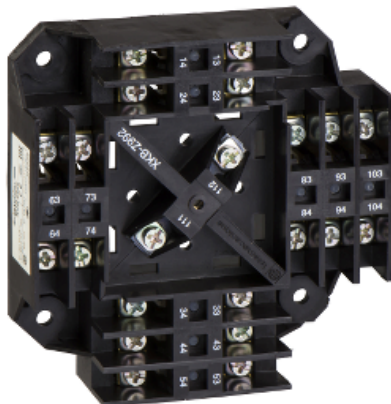

Main

Product or component type	Controllers separate parts
Accessory / separate part category	Control accessory
Product specific application	Light hoisting applications
Product compatibility	XKB
Accessory / separate part type	Contacts block
Accessory / separate part specific characteristic	For use with zero (center) position interlocking handle For use with simple handle

Complementary

Contact block per direction [control circuit]	4 per movement 1 zero (center) position 2 zero per movement
Electrical connection	Screw clamp terminal, clamping capacity: 1 x 0.5...1 x 1.5 mm ² Screw clamp terminal, clamping capacity: 1 x 0.5...1 x 2.5 mm ²
Enclosure/Cubicle description	Monobloc
Contacts type and composition	8 NO 1 NC 2 NC
Contact operation	Double-break Slow-break
[Ith] conventional free air thermal current	10 A conforming to IEC 337-1 10 A conforming to NF C 63-140 10 A conforming to VDE 0660 10 A conforming to CSA C22.2 No 14
[Ui] rated insulation voltage	500 V AC/DC conforming to IEC 158-1 500 V AC/DC conforming to NF C 20-040 500 V AC/DC conforming to VDE 0110
Maximum resistance across terminals	25 mOhm at 1 A conforming to NF C 93-050
Positive opening	With
Short-circuit protection	10 A cartridge fuse type gG conforming to IEC 337-1B 10 A cartridge fuse type gG conforming to VDE 0660 part 2
Electrical durability	1000000 cycles DC inductive load at 120 V, power broken = 75 conforming to IEC 337-1 DC-11, operating rate <60 cyc/mn 0.5 1000000 cycles DC inductive load at 24 V, power broken = 90 conforming to IEC 337-1 DC-11, operating rate <60 cyc/mn 0.5

1000000 cycles DC inductive load at 48 V, power broken = 90 conforming to IEC 337-1 DC-11, operating rate <60 cyc/mn 0.5

Product weight	0.215 kg
----------------	----------

Environment

Standards	CENELEC EN 50013
-----------	------------------

Offer Sustainability

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------