



### Main

|   |   |
|---|---|
| Range of product  | OsiSense XM   |
| Product or component type                               | Electromechanical pressure sensor                                       |
| Pressure sensor type                                    | Electromechanical pressure sensor                                       |
| Device short name                                       | XMLC  |
| Pressure sensor size                                    | 10 bar  |
| Controlled fluid  | Air (0...70 °C)<br>Fresh water (0...70 °C)<br>Hydraulic oil (0...70 °C) |
| Fluid connection type                                   | G 1/4 (female) conforming to ISO 228                                    |
| Electrical connection                                   | Screw-clamps terminals, 1 x 0.5...2 x 2.5 mm <sup>2</sup>               |
| AWG gauge   | AWG 20...AWG 14   |
| Cable entry   | Cable gland 9...13 mm   |
| Contacts type and composition                           | 2 C/O   |
| Product specific application                            | 30 bar overpressure   |
| Pressure switch type of operation                       | Regulation between 2 thresholds   |
| Electrical circuit type                                 | Control circuit   |
| Scale type  | Adjustable differential   |
| Local display   | With  |
| Adjustable range of switching point on rising pressure  | 0.7...10 bar  |
| Adjustable range of switching point on falling pressure | 0.45...9.35 bar   |
| Possible differential maximum at high setting           | 5.6 bar   |
| Maximum permissible accidental pressure                 | 37.5 bar  |
| Destruction pressure                                    | 67.5 bar  |
| Pressure actuator                                       | Diaphragm   |
| Materials in contact with fluid                         | Steel<br>FPM, FKM   |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                    |  |
|--------------------|--|
| Enclosure material | Zinc alloy   |
| [In] rated current | 3 A, B300, AC-15 (Ue = 120 V) conforming to EN/IEC 60947-5-1<br>1.5 A, B300, AC-15 (Ue = 240 V) conforming to EN/IEC 60947-5-1<br>0.1 A, R300, DC-13 (Ue = 250 V) conforming to EN/IEC 60947-5-1 |

## Complementary

|   |   |
|---|---|
| Possible differential minimum at low setting  | 0.25 bar (+/- 0.05 bar)   |
| Possible differential minimum at high setting | 0.65 bar (+/- 0.01 bar)   |
| Maximum permissible pressure - per cycle      | 30 bar  |
| Terminal block type                           | 8 terminals   |
| Maximum operating rate                        | 120 cyc/mn  |
| Repeat accuracy                               | 2 %   |
| [Ui] rated insulation voltage                 | 300 V conforming to UL 508<br>500 V conforming to EN/IEC 60947-1<br>300 V conforming to CSA C22.2 No 14 |
| [Uimp] rated impulse withstand voltage        | EN/IEC 60947-1 6 kV   |
| Auxiliary contacts operation                  | Simultaneous, snap action   |
| Contacts material                             | Silver contacts   |
| Maximum resistance across terminals           | 25 mOhm conforming to IEC 255-7 category 3<br>25 mOhm conforming to NF C 93-050 method A                |
| Short-circuit protection                      | 10 A cartridge fuse, type gG (gl)   |
| Mechanical durability                         | 2000000 cycles  |
| Setting                                       | External  |
| Height  | 113 mm  |
| Depth   | 85 mm   |
| Width   | 46 mm   |
| Product weight                                | 3.5 kg  |

## Environment

|                                       |  |
|---------------------------------------|--|
| Standards                             | EN/IEC 60947-5-1<br>CSA C22.2 No 14<br>CE<br>UL 508  |
| Product certifications                | CSA<br>UL<br>EAC   |
| Protective treatment                  | TC standard version  |
| Ambient air temperature for operation | -25...70 °C  |
| Ambient air temperature for storage   | -40...70 °C  |
| Operating position                    | Any position   |
| Vibration resistance                  | 4 gn conforming to IEC 60068-2-6 (f = 30...500 Hz)   |
| Shock resistance                      | 50 gn conforming to IEC 60068-2-27   |
| Electrical shock protection class     | Class I conforming to IEC 1140<br>Class I conforming to IEC 536<br>Class I conforming to NF C 20-030 |
| IP degree of protection               | IP66 conforming to EN/IEC 60529  |

## Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |

---

|                     |  |
|---------------------|--|
| Circularity Profile | No need of specific recycling operations |
|---------------------|--|

---


### Contractual warranty

---

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

---

Dimensions

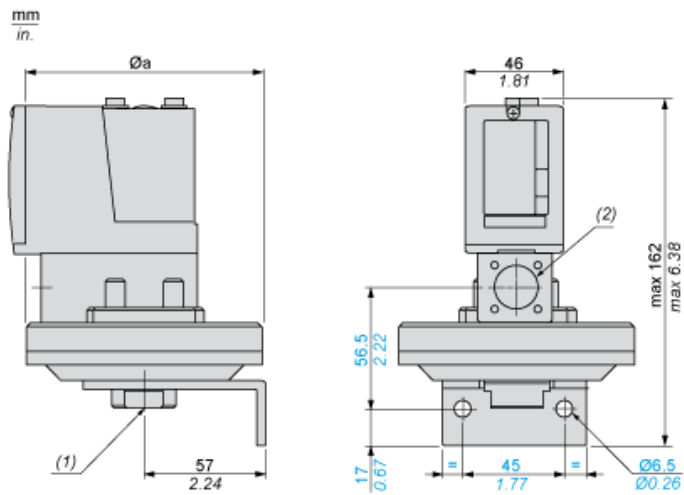

$\varnothing a =$  86 mm / 3.39 in.

(1) 1 fluid entry, tapped G1/4 (BSP female)

(2) 1 electrical connections entry, tapped Pg 13.5

---


## Wiring Diagram

---


### Terminal Model



Operating Curves

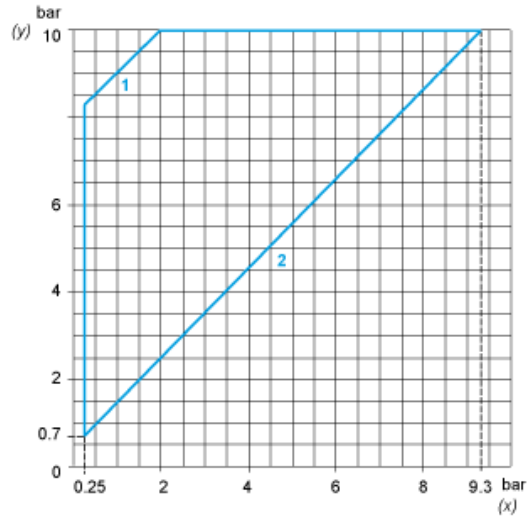

- (y) Rising pressure
- (x) Falling pressure
- 1 : Maximum differential
- 2 : Minimum differential

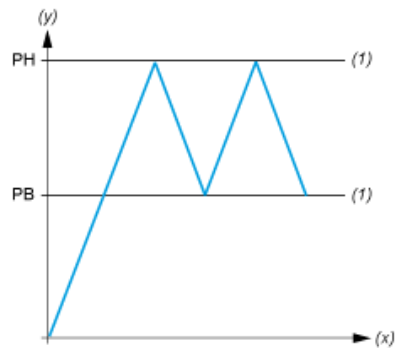

- (y) Pressure
- (x) Time
- (1) Adjustable value
- PH : High point
- PB : Below point