



Main

Range of product	Preventa Safety automation
Product or component type	Digital input card
Safety module name	XPS MF60
Safety use category	Category 4 maximum conforming to EN 954-1 Performance level e conforming to EN/ISO 13849-1 SIL 3 conforming to EN/IEC 61508
Function of module	Monitoring safety detection Monitoring safety dialogue
Standards	DIN V 0801 DIN V 19250 EN 50156 pending IEC 61131
[Us] rated supply voltage	24 V DC (- 15...20 %)
Group of channels	4 groups of 7 discrete inputs and 1 group of 4 discrete inputs
Discrete input number	32, isolated
Connections - terminals	Removable screw terminal block, clamping capacity: 1 x 0.14...1 x 1.5 mm ² , AWG 28...16 flexible without cable end Removable screw terminal block, clamping capacity: 1 x 0.14...1 x 1.5 mm ² , AWG 28...16 solid without cable end Removable screw terminal block, clamping capacity: 1 x 0.25...1 x 0.5 mm ² , AWG 22...20 flexible with cable end Removable screw terminal block, clamping capacity: 1 x 0.25...1 x 1.5 mm ² , AWG 22...16 flexible without cable end Removable screw terminal block, clamping capacity: 2 x 0.14...2 x 0.5 mm ² , AWG 28...20 solid without cable end Removable screw terminal block, clamping capacity: 2 x 0.14...2 x 0.75 mm ² , AWG 28...18 flexible without cable end Removable screw terminal block, clamping capacity: 2 x 0.25...2 x 0.34 mm ² , AWG 22 flexible without cable end Removable screw terminal block, clamping capacity: 2 x 0.5 mm ² , AWG 20 flexible with cable end

Complementary

Marking	CE
Discrete input voltage	24 V DC
Voltage state 0 guaranteed	<= 5 V
Voltage state 1 guaranteed	10...30 V
Current state 0 guaranteed	<= 1 mA
Current state 1 guaranteed	2...5 mA
Number of terminal blocks	5
Current consumption	0.05 A at 3.3 V DC on rack 0.2 A at 24 V DC on power supply
Product weight	0.26 kg

Environment

Product certifications	CSA C-Tick TÜV UL
IP degree of protection	IP20 with covering plate on unused in rack I/O card slots
Ambient air temperature for operation	0...60 °C conforming to EN/IEC 61131-2
Ambient air temperature for storage	-40...85 °C conforming to EN/IEC 61131-2
Relative humidity	95 % (supply not connected)
Operating altitude	< 2000 m
Pollution degree	2
Class of protection against electric shock	Class II conforming to IEC 61131-2
Electromagnetic compatibility	EN/IEC 61131-2
Vibration resistance	1 gn, 10...150 Hz conforming to EN 61131-2 (10 cycles per axis)
Shock resistance	15 gn for 11 ms (2 cycles per axis), conforming to EN 61131-2
Resistance to electrostatic discharge	4 kV contact conforming to EN/IEC 61000-4-2 8 kV on air conforming to EN/IEC 61000-4-2
Resistance to electromagnetic fields	10 V/m (26 MHz...1 GHz), amplitude modulation 80 % conforming to EN/IEC 61000-4-3

Front View

Technical drawing of the front panel of a 12-slot rack-mountable PLC. The panel is red with a white central area. It features a 'Telemecanique' logo and 'XPSMF60' and 'XPSMF50 I' labels. The top section contains seven XPSMF modules: XPSMF C RJ22, XPSMF A B01, XPSMF C0240 I, XPSMF D0240 I, XPSMF D0201, XPSMF D0240 I, and XPSMF A C001 I. The bottom section contains a 24-pin D-sub connector and a 24-pin D-sub connector. The drawing includes dimensions in millimeters and inches.


Dimensions (mm / inches):

- Overall width: 216 mm / 8.50 inches
- Overall height: 310 mm / 12.20 inches
- Module height: 34 mm / 1.34 inches
- Module spacing: 14 mm / 0.55 inches
- Module width: 26 mm / 1.02 inches
- Module depth: 7 mm / 0.28 inches
- Module width (bottom): 20 mm / 0.79 inches
- Module width (bottom): 9 mm / 0.35 inches
- Module width (bottom): 257 mm / 10.12 inches

Schneider
Electric


Mounting

Air Circulation

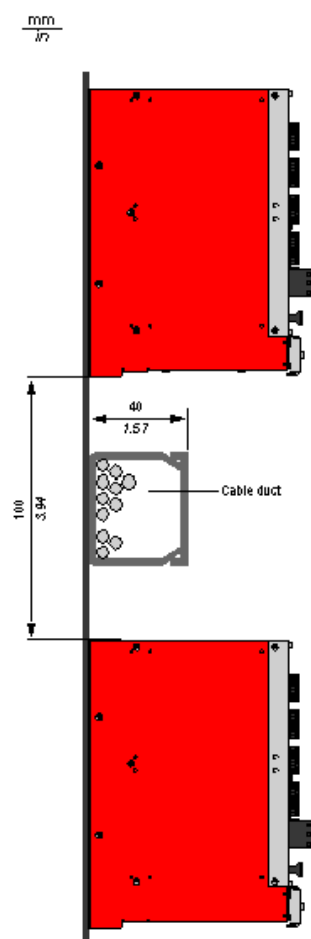

Minimum clearances

$\frac{\text{mm}}{\text{in}}$

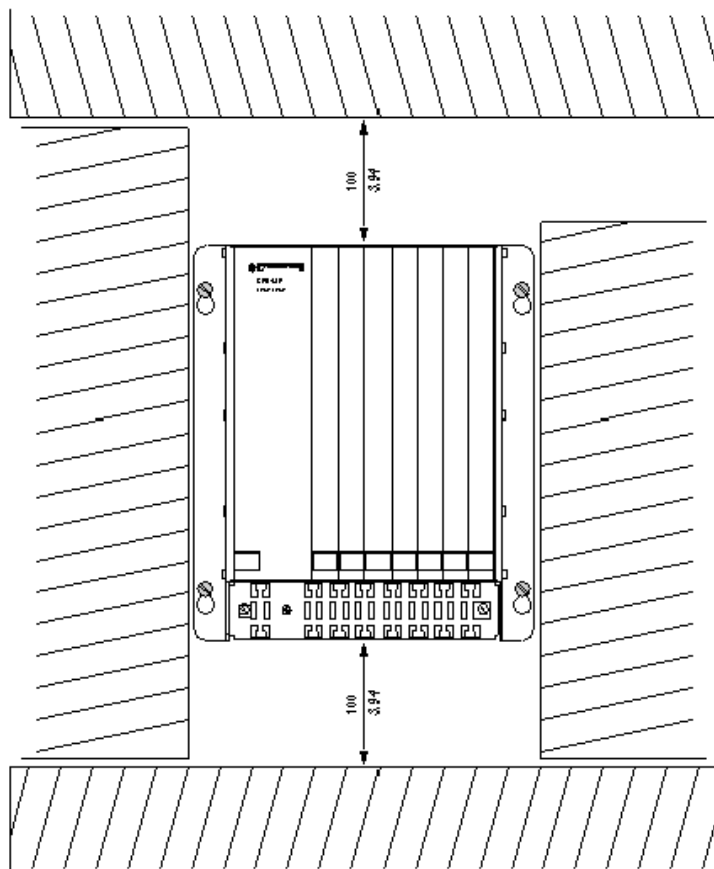

Emergency Stop Connections (Line Control)

